

TEMPUS DALI SURFACE EMERGENCY DOWNLIGHT

Product Features

- Non-maintained emergency downlight
- Surface mount luminaire suitable for plasterboard or sold ceilings
- Combined surface and recessed mounting option in 1 luminaire
- Installation via rear cable entry
- Interchangeable advanced optics included - Open Area and Escape Route lenses
- IP65 attachment available upon request



CAT NO.	TYPE	COLOUR	LUMINAIRE LUMENS	WATTAGE
LEMEDSWEDA	DALI	White	240lm	3.5W
LEMEDSBEDA	DALI	Black	240lm	3.5W

SPACING INFORMATION

Open Area (based on min. 0.5 Lux)



MOUNTING HEIGHT (M)	DISTANCE LM TO LM (M)
2.5	11.9
3.0	12.8
3.5	13.5
4.0	14.0

Escape Route (based on min. 1 Lux)

MOUNTING HEIGHT (M)	DISTANCE LM TO LM (M)
2.5	21.1
3.0	24.0
3.5	25.3
4.0	26.1



Product Drawing

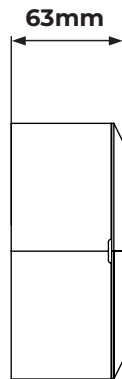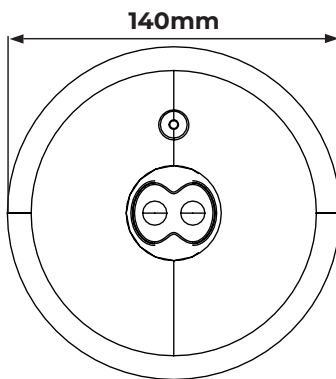


CAT NO.	WEIGHT (kg)	FREQUENCY (Hz)	IK RATING	BATTERY TYPE	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)
LEMEDSWEDA	0.6	50-60	IK04	LiFePO4	0 to 45	25
LEMEDSBEDA	0.6	50-60	IK04	LiFePO4	0 to 45	25

Open Area Luminaire Performance

Light Output Ratio: 100%
 Luminaire Efficacy: 100 lm/W
 Light Distribution: A20+98.8%+1.2%
 CIE Flux Codes: 16 57 99 99 100
 UGR 4H 8H
 (20%, 50%, 70%) C0 / C90: 39.1 / 39.2


Luminous Intensity

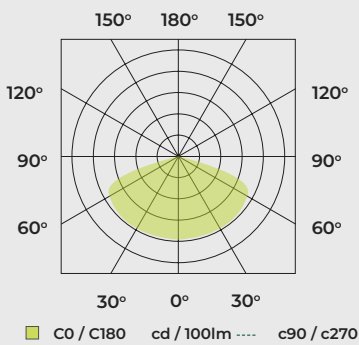

Escape Route Luminaire Performance

Light Output Ratio: 100%
 Luminaire Efficacy: 100lm/W
 Light Distribution: A20+98.4%+1.6%
 CIE Flux Codes: 34 64 96 98 100
 UGR 4H 8H
 (20%, 50%, 70%) C0 / C90: 48.2 / 27.9

Luminous Intensity

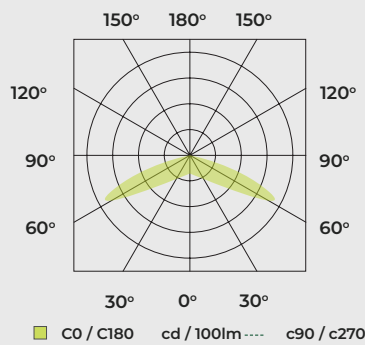

STANDARD	DESCRIPTION
60598-1	Luminaires – General requirements
60598-2-22	Luminaires – Emergency
61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
61000-3-3	Lamp controlgear – Part 1: General and safety requirements
61547	Equipment for general lighting purposes – EMC immunity requirements
55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

