

TEMPUS DALI IP65 TWINSPOT


Product Features

- Non-Maintained IP rated emergency twinspace
- Polycarbonate body with polycarbonate heads
- Adjustable heads to ensure coverage area
- Ideal for high ceiling applications



CAT NO.	TYPE	COLOUR	LUMINAIRE LUMENS	WATTAGE
LEMIPTWNWEDA	DALI	White	780lm	3.5W
LEMIPTWNBEDA	DALI	Black	780lm	3.5W

Product Drawing

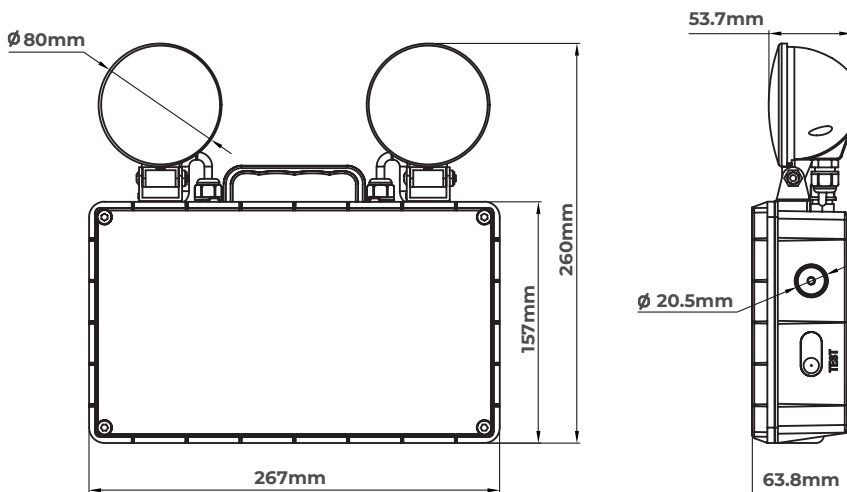

CAT NO.	WEIGHT (kg)	CRI	FREQUENCY (Hz)	IK RATING	BATTERY TYPE	RECHARGE TIME	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C) MP RANGE
LEMIPTWNWEDA	1.2	>80	50-60	IK08	LiFePO4	24 Hours	0 – 45°C	25°C
LEMIPTWNBEDA	1.2	>80	50-60	IK08	LiFePO4	24 Hours	0 – 45°C	25°C

STANDARD	DESCRIPTION
60598-1	Luminaires – General requirements
60598-2-22	Luminaires – Emergency
61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
61000-3-3	Lamp control gear – Part 1: General and safety requirements
61547	Equipment for general lighting purposes – EMC immunity requirements
55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

