
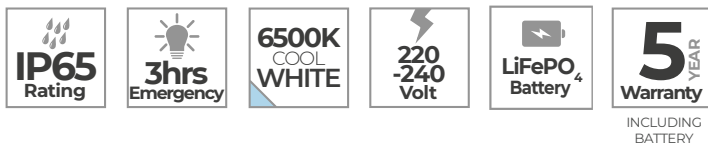


TEMPUS DUAL BULKHEAD



Product Features

- Surface mount emergency bulkhead for internal and external use
- Self-Test as standard, Jumper connection inside to enable maintained operation
- Supplied with self-adhesive legend kit

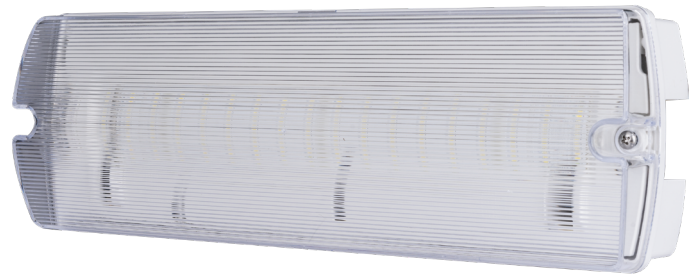

Product Drawing

CAT NO.	TYPE	LUMINAIRE LUMENS	WATTAGE
LEMBKM3	Self-Test/Manual-Test	150lm	2W

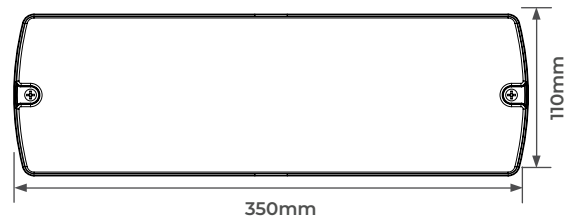

CAT NO.	WEIGHT (kg)	CRI	FREQUENCY (Hz)	IK RATING	BATTERY TYPE	BATTERY CAPACITY	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)
LEMBKM3	0.52	>80	50-60	IK08	LIFEPO4	1500mAh	0 – 25°C	25°C

STANDARD	DESCRIPTION
60598-1	Luminaires – General requirements
60598-2-22	Luminaires – Emergency
61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
61000-3-3	Lamp control gear – Part 1: General and safety requirements
61547	Equipment for general lighting purposes – EMC immunity requirements
55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

