

TEMPUS DUAL RECESSED DOWNLIGHT

Product Features


- Discreet self-test emergency downlight
- Recessed mount luminaire suitable for plasterboard or suspended ceiling systems
- Supplied with open area and corridor optics to suit all applications
- Switch under battery cover to allow non-maintained operation



CAT NO.	TYPE	COLOUR	LUMINAIRE LUMENS	WATTAGE
LEMDW	Self-Test/Manual-Test	White	220lm	3W



Product Drawing

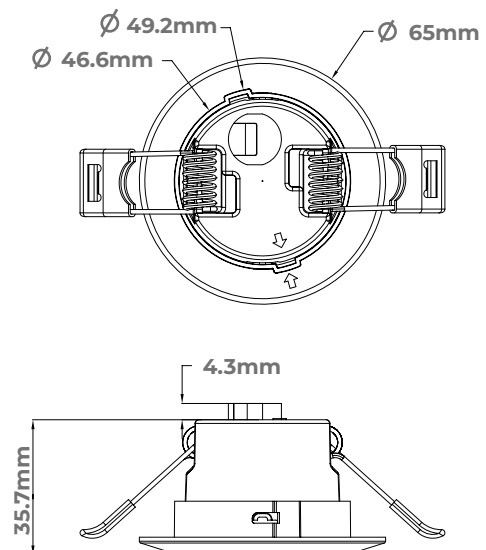


CAT NO.	WEIGHT (kg)	FREQUENCY (Hz)	IK RATING	BATTERY TYPE	BATTERY CAPACITY	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)
LEMDW	0.016	50-60	IK04	LiFePO4	1600mAh	0 to 25°C	25

Open Area
Luminaire Performance

Light Output Ratio: 100%
Luminaire Efficacy: 100 lm/W
Light Distribution: A20+98.8%+1.2%
CIE Flux Codes: 16 57 99 99 100
UGR 4H 8H
(20%, 50%, 70%) C0 / C90: 39.1 / 39.2


Luminous Intensity



Escape Route
Luminaire Performance

Light Output Ratio: 100%
Luminaire Efficacy: 100lm/W
Light Distribution: A20+98.4%+1.6%
CIE Flux Codes: 34 64 96 98 100
UGR 4H 8H
(20%, 50%, 70%) C0 / C90: 48.2 / 27.9

Luminous Intensity



STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-2	Luminaires – Recessed
EN 60598-2-22	Luminaires – Emergency
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

