

TEMPUS DUAL EXIT BOX

Product Features

- Wall-mounted Self-test and Manual-test illuminated exit box
- Steel mounting plate with polycarbonate frame
- Side and rear cable entry points
- Internal switch to allow maintained operation
- Legends supplied as standard (Left/Right/Up) Down legend - LEMEBXDL-02 supplied separately




CAT NO.	DESCRIPTION	LEGEND DIRECTION
LEMEBXM3	Self-Test/Manual-Test	Up

Product Accessories

CAT NO.	DESCRIPTION	LEGEND DIRECTION
LEMEBXDL	Self-Test/Manual-Test	Down

Product Drawing

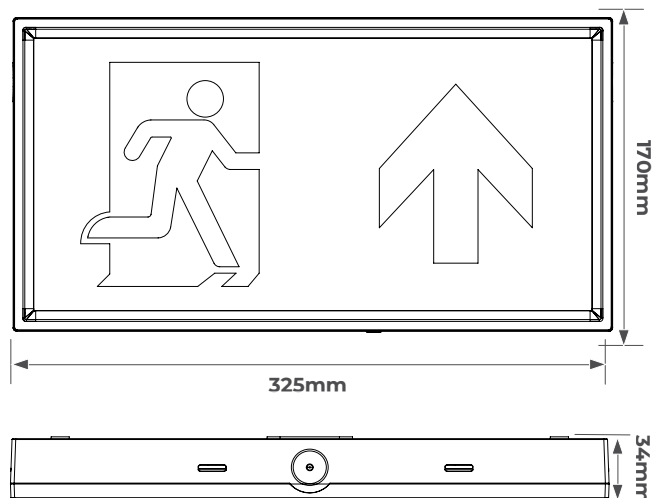

CAT NO.	WEIGHT (kg)	CRI	FREQUENCY (Hz)	IK RATING	BATTERY TYPE	BATTERY CAPACITY	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)
LEMEBXM3	0.77	>80	50-60	IK04	LiFePO4	1600mAh	0 to 25°C	25

STANDARD	DESCRIPTION
60598-1	Luminaires – General requirements
60598-2-22	Luminaires – Emergency
61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits – for harmonic current emissions
61000-3-3	Lamp controlgear – Part 1: General and safety requirements
61547	Equipment for general lighting purposes – EMC immunity requirements
55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

