

TEMPUS DUAL TWINSPOT

Product Features

- · Self-Test/Non-Maintained IP rated Emergency twinspot
- · Polycarbonate body with polycarbonate heads
- · Adjustable heads to ensure coverage area
- · Ideal for high ceiling applications




















3.5W



Product Drawing

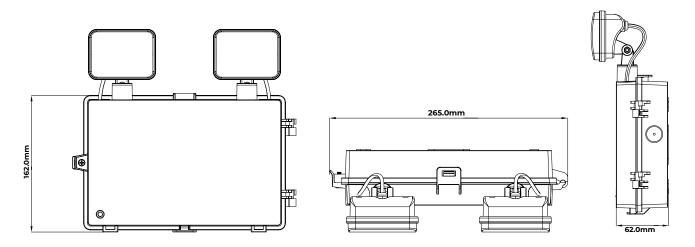

| CAT NO. | WEIGHT (kg) | CRI | FREQUENCY (Hz) | IK RATING | BATTERY TYPE | BATTERY CAPACITY | TEMP RANGE (°C) | AMBIENT TEMP RATED LIFE (°C) MP RANGE |
|------------|----------------|-----|-------------------|--------------|-----------------|---------------------|--------------------|--|
| LEMIPTWNM3 | 0.82 | >80 | 50-60 | IK08 | LiFePO4 | 7200mAh | 0 – 25°C | 25°C |

| STANDARD | DESCRIPTION | | | | | | |
|------------|---|--|--|--|--|--|--|
| 60598-1 | Luminaires – General requirements | | | | | | |
| 60598-2-22 | Luminaires – Emergency | | | | | | |
| 61000-3-2 | Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions | | | | | | |
| 61000-3-3 | Lamp control gear – Part 1: General and safety requirements | | | | | | |
| 61547 | Equipment for general lighting purposes – EMC immunity requirements | | | | | | |
| 55015 | Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment | | | | | | |







