

PULLOUT SPOTLIGHT RECESSED


Product Features

- Recessed spotlight with retractable head to match Luceco track spot circular range
- Lumen outputs comparable to CDM-T Lamps
- 24° lens fitted, 38° lens also supplied



CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE	EQUIVALENT WATTAGE	FREQUENCY (Hz)
LSRW20S40	Standard	1950	25W	35W	50

Product Drawing

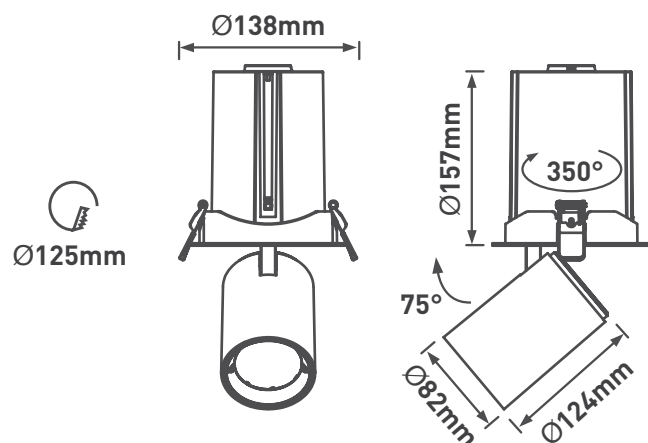


CAT NO.	WEIGHT (KG)	CEILING CUTOUT (MM)	CCT (K)	CRI	TEMPERATURE (C°)	AMBIENT TEMP RATED LIFE (C°)	LAT RATED LIFE	BAT RATED LIFE
LSRW20S40	0.9	125	4000K	>80	0 to +30	25	70	50

LSRW20S40-24°
Luminaire Performance

Light Output Ratio: 100%
Luminaire Efficacy: 75 lm/W
Light Distribution: A70+100.0%+0.0%
CIE Flux Codes: 91 99 100 100 110
UGR 4H 8H
(20%, 50%, 70%) C0 / C90: 21.3 / 20.4


Luminous Intensity



LSRW20S40-38°
Luminaire Performance

Light Output Ratio: 100%
Luminaire Efficacy: 75 lm/W
Light Distribution: A80+100.0%+0.0%
CIE Flux Codes: 97 99 100 100 110
UGR 4H 8H
(20%, 50%, 70%) C0 / C90: 17.5 / 15.5

Luminous Intensity



STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment