


LUXPANEL DELTA CONNECT 600 x 600

Product Features

- Architectural direct/indirect backlit LED Panel with slimline 57mm depth finished in RAL9016 white
- Integrated Platform PIR sensor with motion sensitivity and daylight control
- 600x600mm white aluminium frame with TPa rated diffuser and UGR19 compliant
- Recessed mounted suitable for use in 15mm or 24mm standard exposed ceiling grids

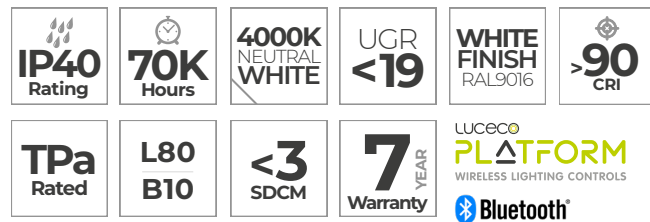

CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE	Llm/W
LPDC66W20LPW940PIR	Digital Dimmable	2000	15.5	129
LPDC66W28LPW940PIR	Digital Dimmable	2800	22	127
LPDC66W35LPW940PIR	Digital Dimmable	3500	28	125
LPDC66W42LPW940PIR	Digital Dimmable	4200	33	127

Product Accessories

Standard/Self Test Emergency Pack	LED3EP1004W
DALI Addressable Emergency Pack	LED3EP80DED
Luceco Platform Wireless Emergency Pack	LED3EP80ELTPW



To Specify:

Recessed Luxpanel Delta Connect 600x600mm LED Panel with efficacy up to 129Llm/cW, UGR19 and TPa rated diffuser.

CAT NO.	WEIGHT	CRI	VOLTAGE	FREQUENCY (Hz)	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)
LPDC66W20LPW940PIR	2.3	>90	220-240V	50-60	-20° - +25°	25
LPDC66W28LPW940PIR	2.3	>90	220-240V	50-60	-20° - +25°	25
LPDC66W35LPW940PIR	2.3	>90	220-240V	50-60	-20° - +25°	25
LPDC66W42LPW940PIR	2.3	>90	220-240V	50-60	-20° - +25°	25




Product Drawing

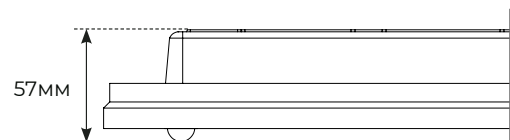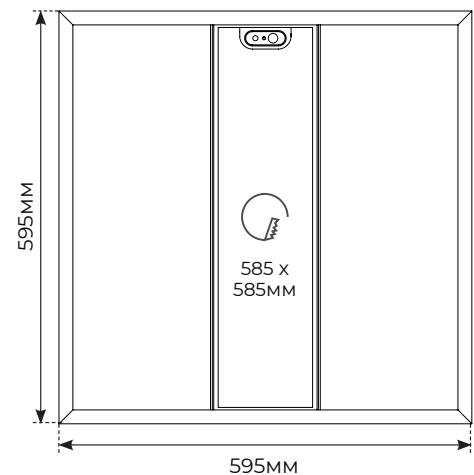

Luminaire Performance

Luminaire Efficiency: 100%
Luminaire Efficacy: 129 lm/W
Classification: A50 ±99.3% ±0.7%
CIE Flux Codes: 62 87 97 99 84
UGR 4H 8H
(20%, 50%, 70%) 16.6 / 16.9
CO / C90:

Luminous Intensity

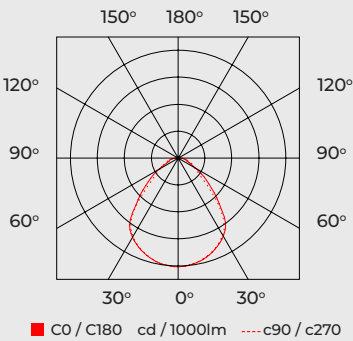

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-2	Luminaires – Recessed
EN 60598-2-22	Luminaires – Emergency
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

