


VISTA FLOODLIGHT


Product Features

- Available in 2 body sizes
- Power and CCT Change as standard
- Pre-wired 1m of H05RN-F rubber cable
- Built in photocell as standard, can be switch on/off as required
- Asymmetric distribution to help reduce pollution and glare



CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/cW	PROJECTED AREA
LVIS150SCC	Fixed Output	7500/12000/15000	50/80/100W	150	0.038m ²
LVIS300SCC	Standard	15000/22500/30000	100/150/200W	150	0.065m ²

Product Drawings

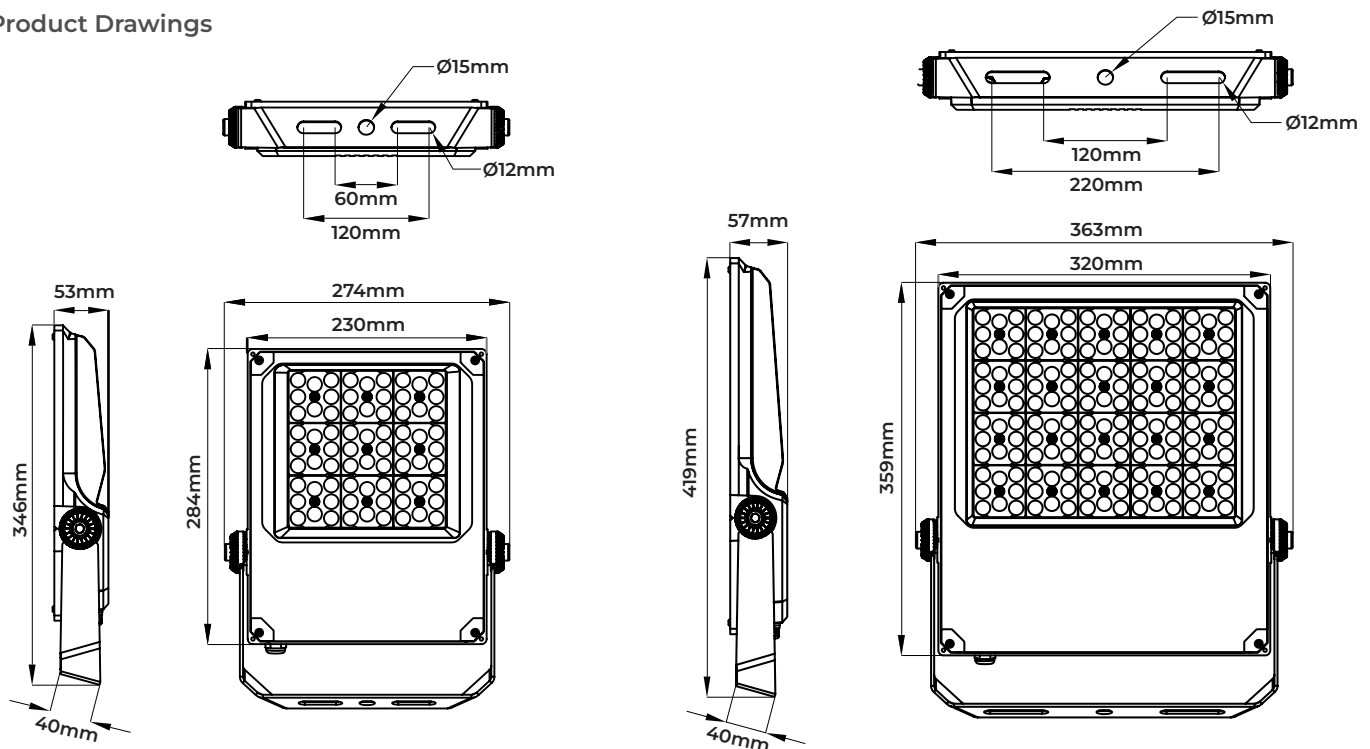

CAT NO.	WEIGHT (KG)	CRI	INPUT VOLTAGE	L FIXING CENTRES (MM)	IK RATING	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE
LVIS150SCC	2.96	>70	220-240V	60-120	IK08	-30 to +45	25	L70 B50
LVIS300SCC	4.81	>70	220-240V	120-220	IK08	-30 to +45	25	L70 B50

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-5	Luminaires – Floodlights
EN 61347-1	Lamp controlgear – Part 1: General and safety requirements
EN 61347-2-13	Lamp controlgear – Part 2-13: Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 62471	Photobiological safety of lamps and lamp systems
2002/96/EC	Waste Electrical & Electronic Equipment (WEEE)
2011/65/EU	Restriction of the use of certain Hazardous Substances in EEE (RoHS)
(EC) No 1907/2006	The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

