

TEMPUS DUAL DECORATIVE EXIT BLADE

Product Features

- Self-test and Manual-test emergency exit blade with ceiling or wall mounting as standard, along with a suspended version (max of 1.5m)
- Mechanically fixed legends supplied as standard (Left/Right/Up) *Down legend - LEMDEBDL-02 supplied separately*
- LiFePO4 battery technology
- Internal switch to allow for Non-Maintained operation




CAT NO.	TYPE	MOUNTING TYPE	LEGEND DIRECTION
LEMDEBM3	Self-Test/Manual-Test	Surface	Up

Product Accessories

CAT NO.	DESCRIPTION
LEMDEBDL	Down Arrow Legend
LEMDEBSUS	Suspension Kit
LEMDEBRC	Semi-Recessing Kit

Product Drawing

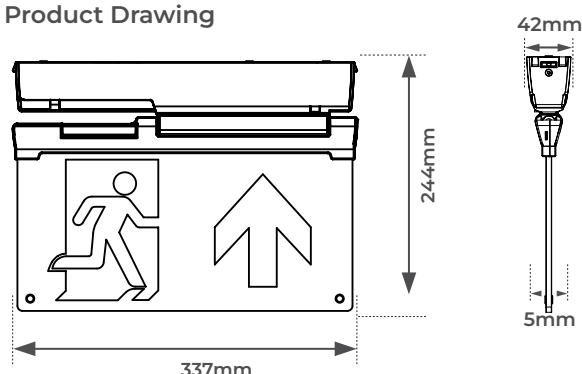

CAT NO.	WEIGHT(Kg)	CRI	FREQUENCY (Hz)	IK RATING	BATTERY TYPE	BATTERY CAPACITY	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)
LEMDEBM3	0.62	≥80	50-60hz	IK04	LiFePO4	600mAh	0 to 25°C	25

STANDARD	DESCRIPTION
60598-1	Luminaires – General requirements
60598-2-22	Luminaires – Emergency
61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits – for harmonic current emissions
61000-3-3	Lamp controlgear – Part 1: General and safety requirements
61547	Equipment for general lighting purposes – EMC immunity requirements
55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

