

LUXPACK ESSENCE

Product Features

- Power Change, 4ft, 5ft & 6ft bodys each switchable between High/Low output
- Energy efficacy at 150Lm/w
- Plug and play emergency pack and Microwave sensor
- Speedfit diffuser
- 20mm conduit entry at each end



CAT NO.	VERSION	LUMINAIRE LUMENS	WATTAGE	COLOUR TEMP
LXB12WLCC	1200mm / 4ft	2400 / 4800	16-32W	3000-4000-6500K
LXB15WLCC	1500mm / 5ft	3600 / 7200	24-48W	3000-4000-6500K
LXB18WLCC	1800mm / 6ft	4800 / 9500	32-63W	3000-4000-6500K

Product Accessories

CAT NO.	DESCRIPTION
UEM2W	Plug and play emergency pack
UMWS	Plug and play Microwave sensor

PRODUCT OPTIONS


DALI Digital Dimmable Insert **D**, eg. LXB15W30**D**40

CAT NO.	REPLACEMENT PARTS
LXB12WLCCM	Replacement LED Array for LXB12WLCC
LXB15WLCCM	Replacement LED Array for LXB15WLCC
LXB18WLCCM	Replacement LED Array for LXB18WLCC
LXB12WLCCD	Replacement LED Driver for LXB12WLCC
LXB15WLCCD	Replacement LED Driver for LXB15WLCC
LXB18WLCCD	Replacement LED Driver for LXB18WLCC

CAT NO.	WEIGHT (KG)	LLM/W	CRI	FREQUENCY (Hz)	IK RATING	TEMP RANGE (°C)	L/B RATED LIFE	FIXING CENTRES
LXB12WLCC	1.115	150	>80	50-60	IK03	-20 to +40	L70 / B50	900mm
LXB15WLCC	1.5	150	>80	50-60	IK03	-20 to +40	L70 / B50	1200mm
LXB18WLCC	1.7	150	>80	50-60	IK03	-20 to +40	L70 / B50	1200mm



Product Drawing

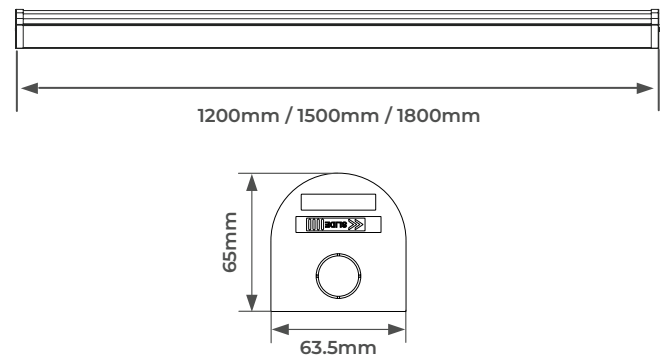

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 60598-2-22	Luminaires – Emergency
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

