


NEO DOWNLIGHT

Product Features


- Adjustable cut-out size suitable for hole sizes 65-185mm
- Power change 9W & 18W, 15W & 23W
- CCT Change 3000K, 4000K & 6000K



CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE
LDN23WLSCT	Fixed Output	1150/2300lm	9/18W
LDN29WLSCT	Fixed Output	2000/2900lm	15/23W

PRODUCT OPTIONS	
Remote Emergency Pack	LED3EP2W

Product Drawing

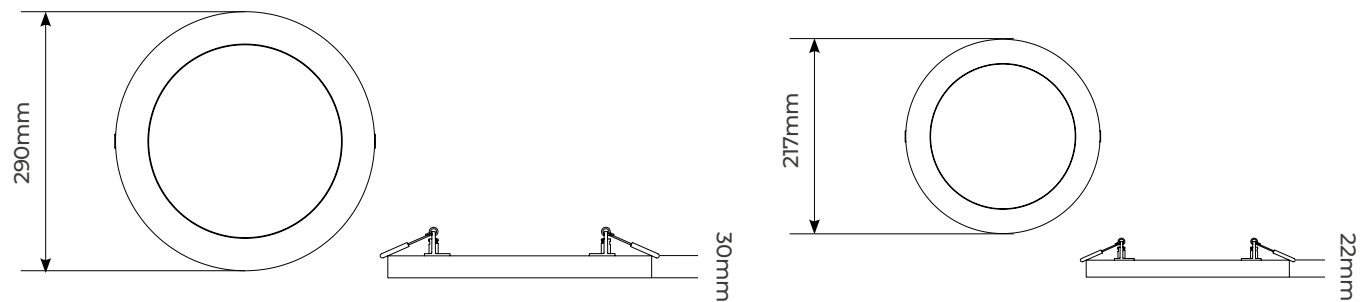

CAT NO.	WEIGHT (kg)	EFFICACY (Llm/W)	CRI	FREQUENCY (Hz)	IK RATING	TEMP RANGE (°C)	L/B RATED LIFE
LDN23WLSCT	0.65	128	>80	50-60	IK03	-20 - +40°C	L70/B50
LDN29WLSCT	0.8	126	>80	50-60	IK03	-20 - +40°C	L70/B50

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-2	Luminaires – Recessed
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

