

TEMPUS CONNECT IP65 BULKHEAD EMERGENCY LIGHTING

Product Features


- Surface mount emergency bulkhead for internal or external use
- Sleek modern design
- Full compatibility with the Luceco Platform Wireless Ecosystem
- Supplied with self-adhesive legend kit and weatherproof cable gland



CAT NO.	TYPE	LUMINAIRE LUMENS	WATTAGE
LEMBKWLPW	LPW Enabled	150	1W

	HEIGHT	AXIAL DISTANCE FROM WALL	AXIAL SPACING	TRANSVERSE SPACING	TRANSVERSE SPACING FROM WALL
OPEN AREA	2.5	3.8	10.7	9.1	4.3
- 0.5 LUX	3	4.1	11.4	9.9	4.5
	4	4.5	12.5	11.2	4.8
ESCAPE ROUTE	2.5	-	-	3.1	8.5
- 1 LUX	3	-	-	9	3.3
(Based on 2m width)	4	-	-	9.6	3.4

Product Drawing

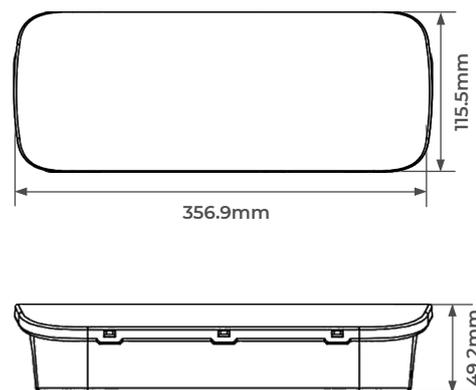

CAT NO.	WEIGHT (kg)	CRI	FREQUENCY (Hz)	IK RATING	BATTERY TYPE	BATTERY CAPACITY	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)
LEMBKWLPW	0.475	>80	50-60	IK08	LifePO4 3.2V	400mAh	5 - 50°C	25°C

STANDARD	DESCRIPTION
60598-1	Luminaires – General requirements
60598-2-22	Luminaires – Emergency
61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
61000-3-3	Lamp control gear – Part 1: General and safety requirements
61547	Equipment for general lighting purposes – EMC immunity requirements
55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

