

TEMPUS CONNECT RECESSED DOWNLIGHT

EMERGENCY LIGHTING


Product Features

- Recessed mounted emergency downlight, 3HR non-maintained operation
- Supplied with interchangeable Open Area and Escape Route optics
- Compatible with the Luceco Platform Wireless Ecosystem



CAT NO.	TYPE	OPTIC	LUMINAIRE LUMENS	WATTAGE
LEMEDWXLPW	Luceco Platform Wireless	Open Area & Corridor	250 Open 185 Corridor	3W

Product Drawing

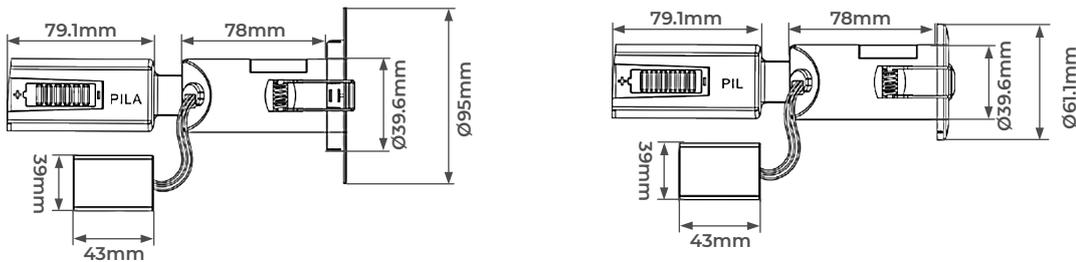


CAT NO.	WEIGHT (kg)	CRI	FREQUENCY (Hz)	IK RATING	BATTERY TYPE	BATTERY CAPACITY	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)
LEMEDWXLPW	0.24	>80	50-60	IK04	3.2V LiFePO4	3000mAh	+5 - +45	25

LEMEDWOLPW Luminaire Performance

Light Output Ratio: 100%
 Luminaire Efficacy: (A30)
 Light Distribution: sym. to C90-C270
 Beam Angle: 140.4° C0-C180
 72.3° C90
 73.1° C270


Luminous Intensity

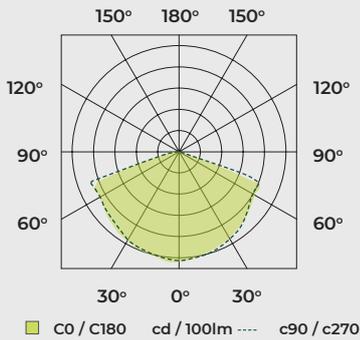

LEMEDWCLPW Luminaire Performance

Light Output Ratio: 99.96%
 Luminaire Efficacy: (A30)
 Light Distribution: sym. to C90-C270
 Beam Angle: --C0-C180
 78.0° C90
 79.° C270

Luminous Intensity

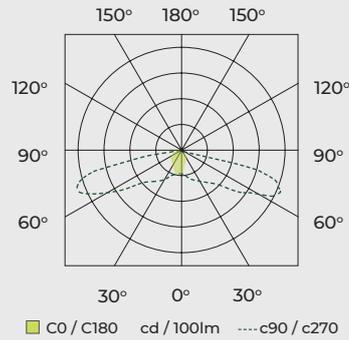

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-2	Luminaires – Recessed
EN 60598-2-22	Luminaires – Emergency
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

