

TEMPUS CONNECT EXIT BOX

EMERGENCY LIGHTING


Product Features

- Wall mounted exit sign
- Mounting plate with polycarbonate frame
- Supplied with a full legend kit
- Compatible with Luceco Platform Wireless Ecosystem



CAT NO.	TYPE
LEMEBXWLPW	LPW

Product Drawing

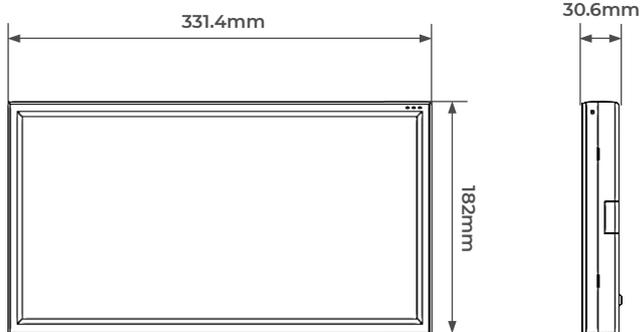

CAT NO.	WEIGHT (kg)	CRI	FREQUENCY (Hz)	IK RATING	BATTERY TYPE	BATTERY CAPACITY	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)
LEMEBXWLPW	1.45	>80	50-60	IK04	3.2V LiFePO4	4000mAh	5 to +40	25

STANDARD	DESCRIPTION
60598-1	Luminaires – General requirements
60598-2-22	Luminaires – Emergency
61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits – for harmonic current emissions
61000-3-3	Lamp controlgear – Part 1: General and safety requirements
61547	Equipment for general lighting purposes – EMC immunity requirements
55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

