

TEMPUS CONNECT SUSPENDED EXIT BLADE

EMERGENCY LIGHTING


Product Features

- Emergency exit blade with ceiling or wall mounting as standard
- Supplied with a full legend kit
- Compatible with the Luceco Platform Wireless Ecosystem
- Polycarbonate body with double sided acrylic legend



CAT NO.	TYPE
LEMDEBSWLPW	Luceco Platform Wireless

Product Drawing

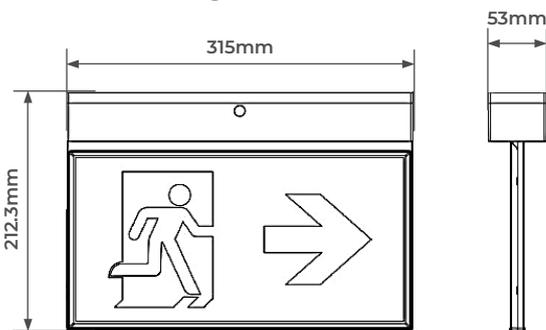

CAT NO.	WEIGHT(Kg)	CRI	FREQUENCY (Hz)	IK RATING	BATTERY TYPE	BATTERY CAPACITY	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)
LEMDEBSWLPW	0.89	≥80	50-60hz	IK04	3.2V 1500mAh LiFePO4	340mAh	-5 to +45	25

STANDARD	DESCRIPTION
60598-1	Luminaires – General requirements
60598-2-22	Luminaires – Emergency
61000-3-2	Electromagnetic compatibility (EMC) - Part 3-2: Limits – for harmonic current emissions
61000-3-3	Lamp controlgear – Part 1: General and safety requirements
61547	Equipment for general lighting purposes – EMC immunity requirements
55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

