

TEMPUS CONNECT SURFACE DOWNLIGHT

EMERGENCY LIGHTING




Product Features

- Surface mount luminaire suitable for plasterboard or solid ceilings
- Installation via rear cable entry
- Luceco Platform Wireless Enabled
- Hinged design for easy install



CAT NO.	OPTIC	LUMINAIRE LUMENS	WATTAGE
LEMEDSWOLPW	Open Area	245lm	2W
LEMEDSWCLPW	Corridor	200lm	2W

Product Drawing

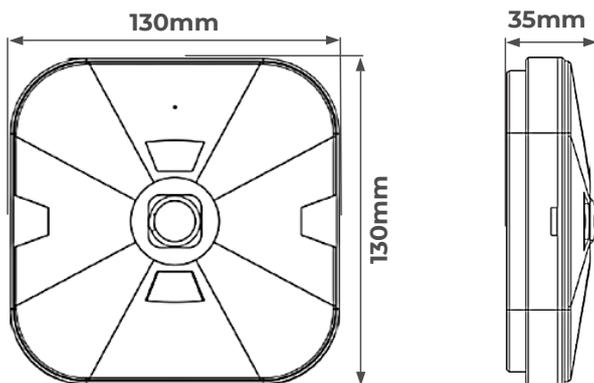


CAT NO.	WEIGHT (kg)	FREQUENCY (Hz)	IK RATING	BATTERY TYPE	BATTERY CAPACITY	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)
LEMEDSWOLPW	0.6	50-60	IK04	3.2V 1500mAh LiFePO4	1500mAh	0 to 45	25
LEMEDSWCLPW	0.6	50-60	IK04	3.2V 1500mAh LiFePO4	1500mAh	0 to 45	25

LEMEDSWOLPW Luminaire Performance

Light Output Ratio: 100%
 Luminaire Efficacy: (A30)
 Light Distribution: sym. to C90-C270
 Beam Angle: 148.1° C0-C180
 73.6° C90
 72.3° C270


Luminous Intensity

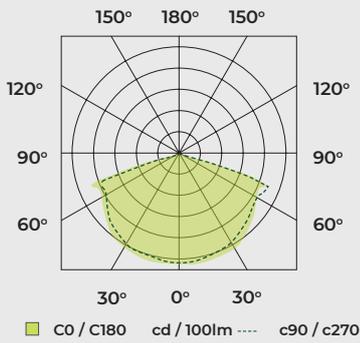

LEMEDSWCLPW Luminaire Performance

Light Output Ratio: 99.9%
 Luminaire Efficacy: (A30)
 Light Distribution: sym. to C90-C270
 Beam Angle: -- C0-C180
 81.1° C90
 79.2° C270

Luminous Intensity

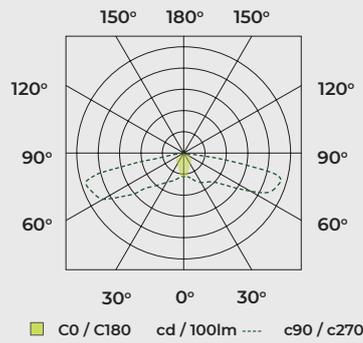

STANDARD	DESCRIPTION
60598-1	Luminaires – General requirements
60598-2-22	Luminaires – Emergency
61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
61000-3-3	Lamp controlgear – Part 1: General and safety requirements
61547	Equipment for general lighting purposes – EMC immunity requirements
55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

