


LUXPANEL SOFTSKY

Product Features

- 600×600mm LED panel with a TPa rated cloud-effect diffuser, delivering soft, low-glare light. Rated for 100,000 hours and supplied in a pack of four.
- Backlit LED technology with slimline 32mm depth.
- Recessed mounted suitable for use in 15mm or 24mm standard exposed ceiling grids.

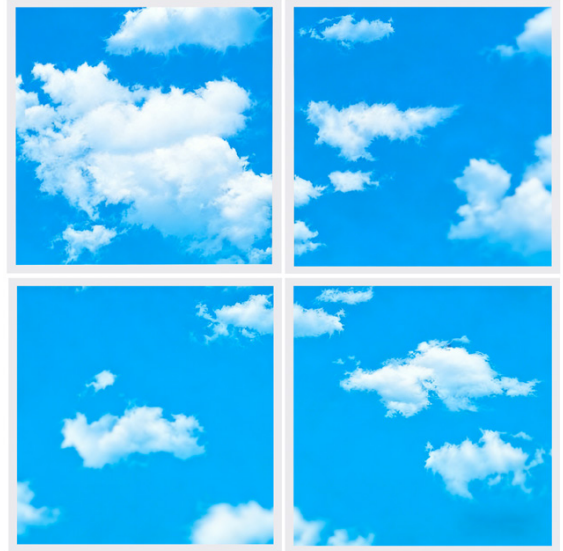

LUCECO
PLATFORM
WIRELESS LIGHTING CONTROLS

| CAT NO. | DRIVER | LUMINAIRE LUMENS | WATTAGE |
|---------------|--------------|------------------|---------|
| LPS66W20S65X4 | Fixed Output | 2000 | 38W |

PRODUCT OPTIONS

| | |
|--------------------------|--|
| DALI Dimmable | Insert D , eg. LPS66W20 D 65X4 |
| Luceco Platform Wireless | Insert LPW , eg. LPS66W20 LPW 65X4 |

PRODUCT ACCESSORIES

| | |
|---|---------------|
| Standard/Self Test Emergency Pack | LED3EP1004W |
| DALI Addressable Emergency Pack | LED3EP80DED |
| Luceco Platform Wireless Emergency Pack | LED3EP80ELTPW |

| CAT NO. | EFFICACY (Lm/W) | CRI | FREQUENCY (Hz) | UGR | TEMP RANGE (°C) | AMBIENT TEMP RATED LIFE (°C) | L/B RATED LIFE |
|---------------|-----------------|-----|----------------|-----|-----------------|------------------------------|----------------|
| LPS66W20S65X4 | 53 | >80 | 50-60 | <19 | -20 to +40 | 25 | L70 / B50 |

| STANDARD | DESCRIPTION |
|---------------|--|
| EN 60598-1 | Luminaires – General requirements |
| EN 60598-2-2 | Luminaires – Recessed |
| EN 60598-2-22 | Luminaires – Emergency |
| EN 61000-3-2 | Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions |
| EN 61000-3-3 | Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection |
| EN 61547 | Equipment for general lighting purposes – EMC immunity requirements |
| EN 55015 | Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment |

Product Drawing

