


SOLAR FLOODLIGHT 12W TWIN HEAD

MOTION SENSOR & COLOUR CHANGE


Product Features

- All the benefits of solar, with mains back up – never be without light – winter included
- Retrofit Ready – reuse existing mains cable and upgrade to solar easily
- Fully Adjustable PIR - set Lux, Time, and Sensitivity your way
- 2 Lighting Modes & 3 Colour Select options
- Separate mountable solar panel with 3m cable
- Easy-Fit Backplate & Connector – fast, simple installation
- Smart Power Switches to mains when battery below 20%



CAT NO.	LUMINAIRE LUMENS	WATTAGE
LEXSHYFT10BCC	Up to 1000lm (x2 500lm)	12W

Product Drawing

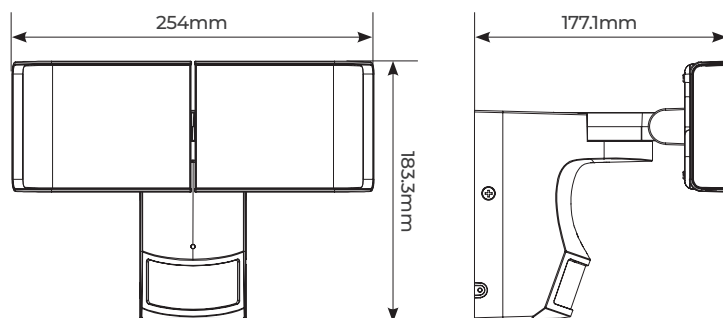

CAT NO.	MIN CRI	OPERATING TEMP (TA°C)	IP RATING	IK RATING	NET WEIGHT (KG)	LIFETIME L70/B50
LEXSHYFT10BCC	>80	-20°C-45°C	IP65	IK05	1.05	30,000

STANDARD	DESCRIPTION
EN 61058-1	General requirements - Switches for appliances
EN 61058-1-1	Switches for appliances - Requirements for mechanical switches
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment