


9W DECORATIVE SOLAR WALL LIGHT

MOTION SENSOR & COLOUR CHANGE


Product Features

- All the benefits of solar, with mains back up – never be without light
- Retrofit Ready – reuse existing mains cable
- Decorative Die cast Aluminium and PC housing
- Removable Li-ion Battery — USB-C chargeable
- 4 Lighting Modes
- Easy-Fit Backplate & Connector — fast, simple installation



CAT NO.	LUMINAIRE LUMENS	WATTAGE
LEXSHYW45CC	Up to 450	9W

Product Drawing

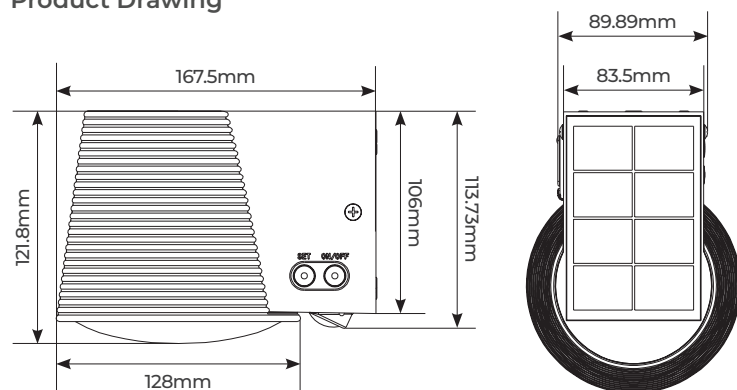

CAT NO.	MIN CRI	OPERATING TEMP (TA°C)	IP RATING	IK RATING	NET WEIGHT (KG)	LIFETIME L70/B50
LEXSHYW45CC	>70	-10°C-45°C	IP65	IK04	0.68	30,000

STANDARD	DESCRIPTION
EN 61058-1	General requirements - Switches for appliances
EN 61058-1-1	Switches for appliances - Requirements for mechanical switches
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

