


MOSI

Product Features


- Polycarbonate base and diffuser for increased durability
- Surface mounting luminaire with 4 side and 1 rear conduit entry points
- 4CCT Change 3000/4000/5000/6000K
- Power change 6/10/13W Selectable

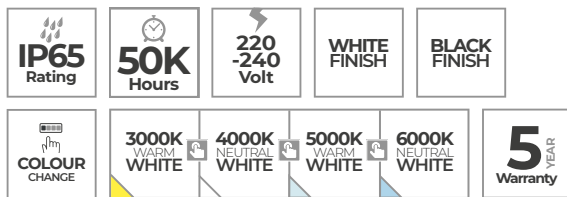


CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE
LBMR200WSCC	Fixed Output	1600	13W
LBMR290WSCC	Fixed Output	1600	13W
LBMS200WSCC	Fixed Output	1600	13W
LBMS260WSCC	Fixed Output	1600	13W

Product Drawing


LBMR200WSCC




LBMR290WSCC



LBMS200WSCC



LBMS260WSCC



Product Accessories

CAT NO.	DESCRIPTION
UBEP2W	Plug&Play Combined 3HR Emergency Pack Accessory
UBMW	Plug&Play Microwave Sensor Accessory

Product Options

PRODUCT OPTIONS	
Black Body	Insert B , eg. LBMR200BSCC

CAT NO.	WEIGHT (kg)	EFFICACY (lm/W)	CRI	FREQUENCY (Hz)	VOLTAGE	IK RATING	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)	L / B RATED LIFE
LBMR200WSCC	0.325	120	>80	50/60	220-240V	IK08	-20°C to +45°C	25	L70 B50
LBMR290WSCC	0.66	120	>80	50/60	220-240V	IK08	-20°C to +45°C	25	L70 B50
LBMS200WSCC	0.325	120	>80	50/60	220-240V	IK08	-20°C to +45°C	25	L70 B50
LBMS260WSCC	0.66	120	>80	50/60	220-240V	IK08	-20°C to +45°C	25	L70 B50

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

