

SOLAR DECORATIVE 9W ROUND BULKHEAD MOTION SENSOR & DETACHABLE SOLAR PANEL


Product Features

- Separate mountable Solar panel with 3m of cable
- No wiring required – ideal for locations without electrical power
- CCT Colour change switch on rear – 3000K, 4000K, 6000K
- Durable IK08 housing with IP65 construction
- Built in PIR motion sensor -30 sec delay
- 2 light modes -Auto and Dusk-till Dawn



CAT NO.	LUMINAIRE LUMENS	WATTAGE	BATTERY CAPACITY
LEXSEB120CC	1200lm	9W	3.7V Li-Ion, 3000mAh

Product Drawing

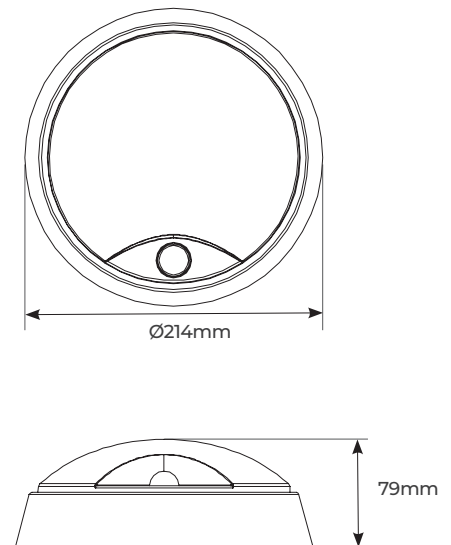

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment