

CELESTE

Product Features

- Polycarbonate construction RAL9016 for a robust luminaire suitable for stairways and corridors
- Power Selectable across 3 different outputs
- Available in 3000 & 4000K
- Halo Backlight with optional colour filters

IP65 Rating | 100K Hours | 3000K WARM WHITE | 4000K NEUTRAL WHITE | 220 -240 Volt | 7 YEAR Warranty

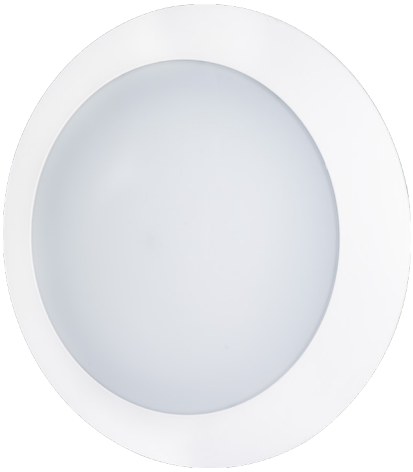

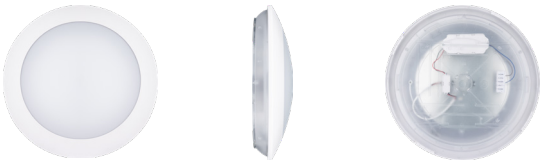


CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE
LBCMSCC	Fixed Output	1250/2200/3200	9/16/23

PRODUCT ACCESSORIES	
LBCHIRD	Red Halo Inserts
LBCHIYL	Yellow Halo Inserts
LBCHIGR	Green Halo Inserts
LBCHIBL	Blue Halo Inserts
LBCPCT	Polished Chrome Trim
LBCMBT	Matt Black RAL9005 Trim
LBCSNT	Satin Nickel Trim
LBC3MSUS6P	3m Suspension Kit with 6 Pole Terminal Block

PRODUCT OPTIONS	
Emergency (Self Test Switchable)	Insert **E**, eg. LBCM**E**CC
DALI	Insert **D**, eg. LBC22**D**CC
DALI Emergency	Insert **ED**, eg. LBC22**ED**CC
DALI Addressable Emergency	Insert **DED**, eg. LBC22**DED**CC
Luceco Platform Wireless	Insert **LPW**, eg. LBC22**LPW**CC

Product Drawing

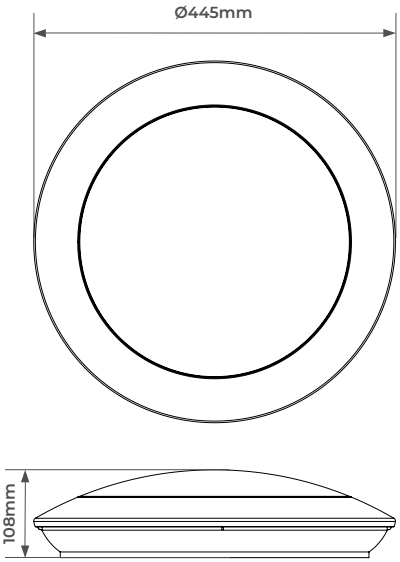

CAT NO.	WEIGHT	LLM/W	CRI	FREQUENCY	IK RATING	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE:	L/B RATED LIFE	FIXING CENTRES
LBCMSCC	1.7kg	140	>80	50-60	IK08	-25 to +40	25	L80 B10	BESA

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

UK CA | CE | RoHS