



**Kingfisher  
Lighting**

## Datasheet

# Helvellyn 2.0



### Specification Text

The luminaire shall be manufactured from high pressure die-cast aluminium. It shall have an LED efficacy of up to 100 luminaire lm/W and will be capable of producing up to 1500 luminaire lumens at 4000K with a CRI >70. It shall have a radial distribution and is IP65 and IK08.

### Specification

Weight: 5 - 5.1 kg

Material: Die-cast Aluminium


Paint Finish: Stainless Steel

### Key Features


- 7.5W - 15W (Switchable output)
- 750 - 1,500 Luminaire Lumens
- Efficacy up to 100 lm/W
- 4000K, CRI >70
- Lifetime >50,000hr
- Symmetrical
- Flange plated



### Optics

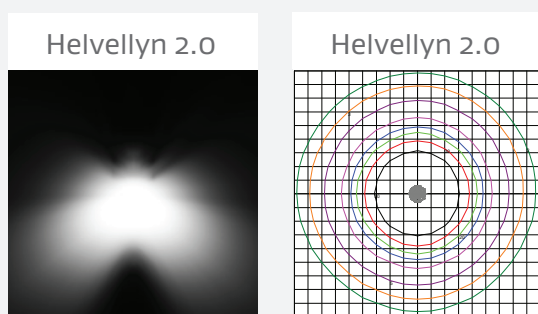

### Dimensions

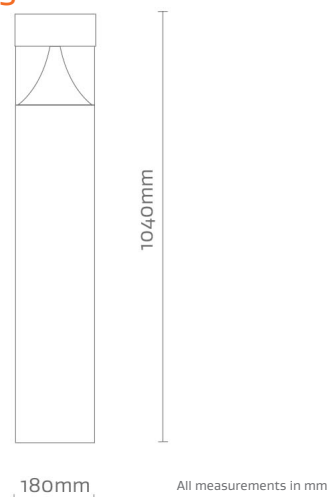

Code	Power	Light Source	Luminaire Lumens	Optic	CCT(K)	IP	IK	Weight (kg)	Paint Finish
HEL715	15W	LED	1500	Symmetrical Illumination	4000	IP65	IK08	5.0	Stainless Steel
HEL715PEC	15W	LED	1500		4000	IP65	IK08	5.1	Stainless Steel

Codes with **EM** at the end relate to emergency version of fitting



### Accessories / Options

- Emergency option
- Photocell option
- Spill shield option

### Mounting Options

- Flanged
- Supplied with J-bolts