

## COACH LANTERN

### Product Features

- Decorative traditional appearance coach lantern
- Complete with E7 lampholder
- Die-cast aluminium housing with glass panels
- Adjustable PIR sensor with time and lux level settings



CAT NO.	TYPE	WATTAGE
LEXDCL4PB	4 Panel	60W
LEXDCL6PB	6 Panel	60W
LEXDCL6PBL	6 Panel Extended Outreach	60W
LEXDCL6PBLD	6 Panel Deco Extended Outreach	60W



LEXDCL4PB



LEXDCL6PB











LEXDCL6PBL



LEXDCL6PBLD

### Product Drawing

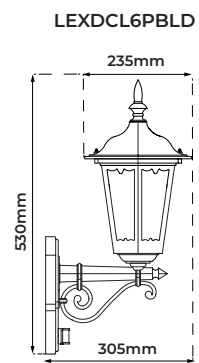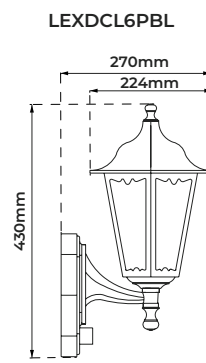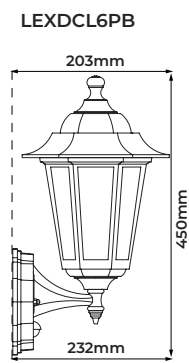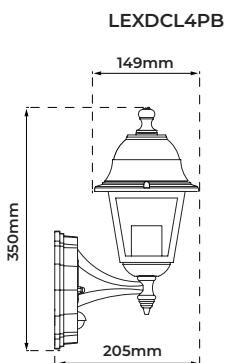

CAT NO.	WEIGHT (kg)	FREQUENCY (Hz)	IK RATING	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)
LEXDCL4PB	1.05	50-60	IK06	0 to +25	25
LEXDCL6PB	1.2	50-60	IK06	0 to +25	25
LEXDCL6PBL	1.7	50-60	IK06	0 to +25	25
LEXDCL6PBLD	1.8	50-60	IK06	0 to +25	25

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

**LUCECO**

This luminaire is compatible with bulbs of the energy classes:

A++

A+

A

B

C

D

E

}

874/2012

