

## STORM LINEAR




### Product Features

- Pull-out speed fit piano key terminals at both ends for through wireable installation
- Clip & fit ends caps and supplied with 20mm IP68 glands
- Ceiling or suspension installation provided with surface mount brackets
- PIR controlled (5 meter detection range) with override at the wall switch



CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE
ESL12P36W40	Fixed Output	3600	36W
ESL15P50W40	Fixed Output	5000	50W

### Product Drawing

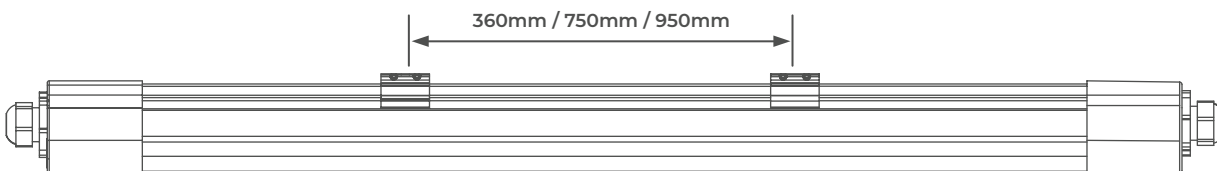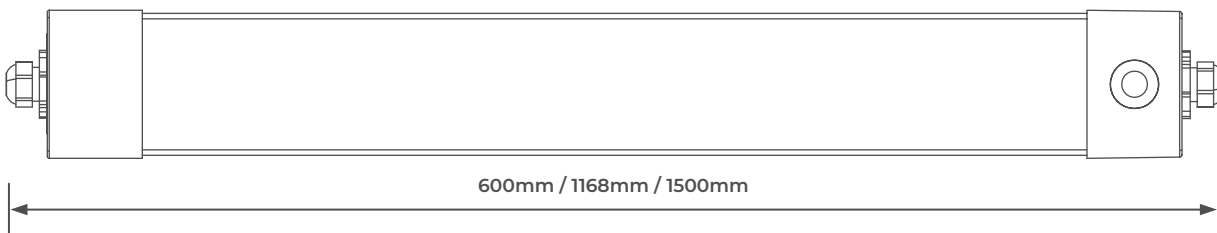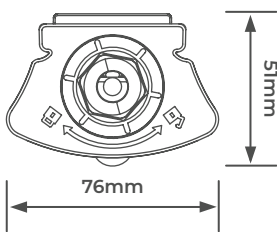


CAT NO.	WEIGHT (kg)	EFFICACY (Lm/W)	CRI	FREQUENCY (Hz)	UGR	IK RATING	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE
ESL12P36W40	5.4	100	>80	50-60	<27	IK08	-20 to +25	25	L70 / B50
ESL15P50W40	6.8	100	>80	50-60	<26	IK08	-20 to +25	25	L70 / B50

### ESL12P36W40 Luminaire Performance

Light Output Ratio:  
Luminaire Efficacy: 100Lm/W  
Light Distribution:  
CIE Flux Codes: 45 75 92 91 100  
UGR 4H 8H  
(20%, 50%, 70%) C0 / C90: 26.6 / 23.9


#### Luminous Intensity

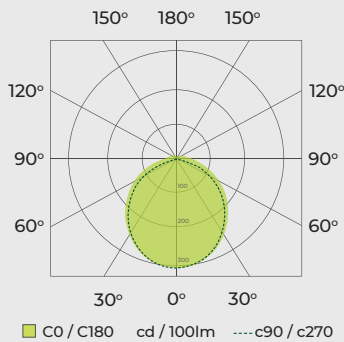

### ESL15P50W40 Luminaire Performance

Light Output Ratio:  
Luminaire Efficacy: 100Lm/W  
Light Distribution:  
CIE Flux Codes: 45 75 92 90 100  
UGR 4H 8H  
(20%, 50%, 70%) C0 / C90: 25.6 / 25.9

#### Luminous Intensity

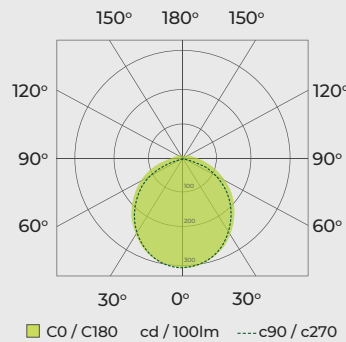

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

**LUCECO**

This luminaire contains built-in LED lamps.

A++
A+
A
B
C
D
E

}

LED

The lamps cannot be changed in the luminaire.

874/2012

