



**Kingfisher
Lighting**

Datasheet

Deco 2.0



Specification Text

The luminaire shall be manufactured from high pressure die-cast aluminium. It shall have an LED efficacy of up to 100 luminaire lm/W and will be capable of producing up to 1500 luminaire lumens at 4000K with a CRI >70. It shall have a radial distribution and is IP65 and IK08.

Specification


Weight: 5 - 5.1 kg
Material: Die-cast Aluminium
Paint Finish: Anthracite Grey

Key Features


- 7.5W - 15W (Switchable output)
- 750 - 1,500 Luminaire Lumens
- Efficacy up to 100 lm/W
- 4000K, CRI >70
- Lifetime >50,000hr
- Symmetrical
- Flange plated



Optics

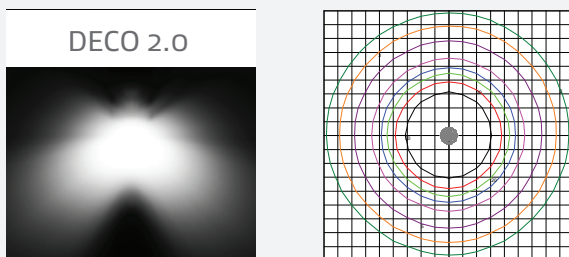

Dimensions

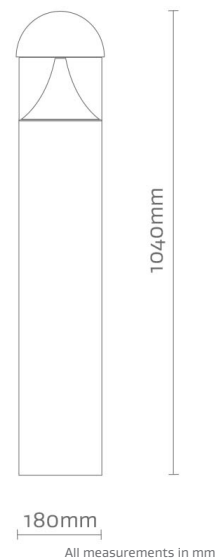

Code	Power	Light Source	Luminaire Lumens	Optic	CCT(K)	IP	IK	Weight (kg)	Paint Finish
DEC715	15W	LED	1500	Symmetrical Illumination	4000	IP65	IK08	5.0	Anthracite Grey
DEC715PEC	15W	LED	1500		4000	IP65	IK08	5.1	Anthracite Grey

Codes with **EM** at the end relate to emergency version of fitting



Accessories / Options

- Emergency option
- Photocell option
- Spill shield option

Mounting Options

- Flanged
- Supplied with J-bolts

