

GUARDIAN OUTDOOR DAY & NIGHT PIR MOTION SENSOR

Product Features


- Adjustable day & night lux sensor - <3 -2000 lux
- Adjustable delay/hold time settings
- IP44 tilt and swivel adjustable surface mounted in white/black finish




CAT NO.	DETECTION RANGE	FINISH
LGIP65WTW	180°	WHITE
LGIP65WTB	180°	BLACK



Product Drawing

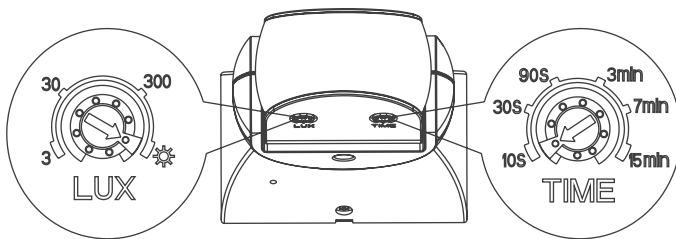

Detection Range

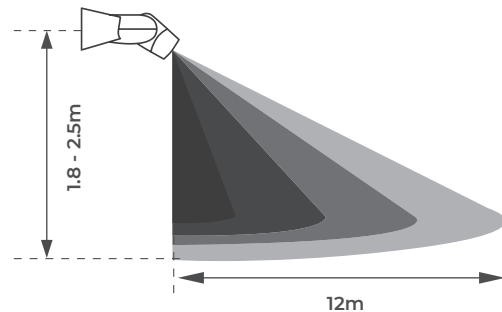

CAT NO.	WEIGHT (kg)	LENGTH	WIDTH	VOLTAGE	FREQUENCY (Hz)	TEMP RANGE
LGIP65WTW	0.2	71mm	83mm	220-240V	50-60	-20°C + 25°C
LGIP65WTB	0.2	71mm	83mm	220-240V	50-60	-20°C + 25°C

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

