


LUXPANEL CLEANLITE

Product Features

- Luxpanel cleanlite is designed to be wiped clean to maintain a hygienic surface
- Optic is bonded to the housing forming an IP65 seal (from beneath)
- Simple recessed installation with a low profile body (<55mm)
- Designed for either universal 15mm or 24mm exposed grid system with 60mm cross tees

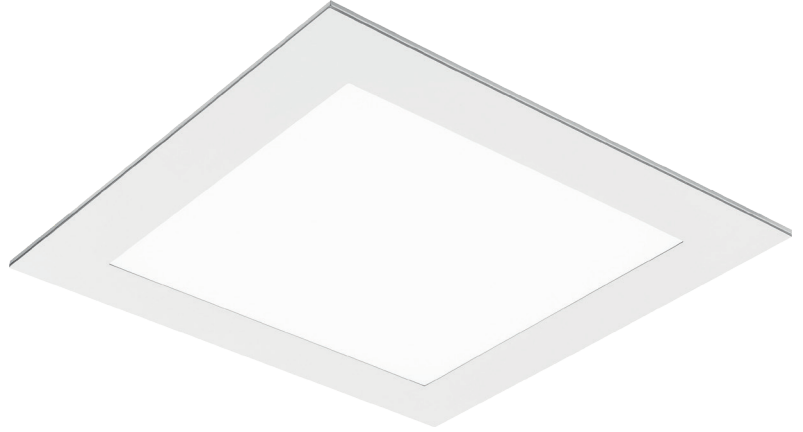


CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE	EFFICACY Lm/cW
LPCL66W41S40	Fixed Output	4100	46W	120
LPCL66W41E40	Fixed Output + Emergency	4100	46W	120
LPCL66W41D40	Digital Dimmable	4100	46W	120
LPCL66W41ED40	Digital Dimmable + Emergency	4100	46W	120

To Specify:

Recessed Luxpanel Cleanlite with efficacy upto 117 Lm/cW, bonded housing allows a IP65 rating and wipe clean luminaire

Product Drawing

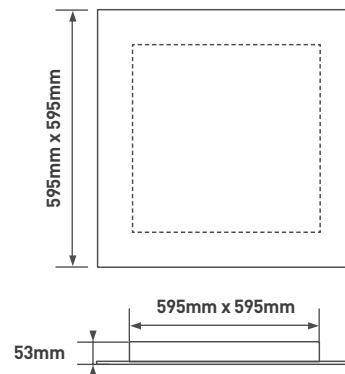

CAT NO.	WEIGHT (kg)	CRI	FREQUENCY (Hz)	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE
LPCL66W41S40	5.3	>80	50-60	-20 - +25	25	L70 / B50
LPCL66W41E40	5.4	>80	50-60	0 - +25	25	L70 / B50
LPCL66W41D40	5.5	>80	50-60	-20 - +25	25	L70 / B50
LPCL66W41ED40	5.6	>80	50-60	0 - +25	25	L70 / B50

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

