

CLIMATE ANTI-LIGATURE




Product Features

- Robust anti ligature linear luminaire suitable for use in secure environments and areas where vandalism may be an issue
- IK10 rated steel body with UV stabilised fire retardant polycarbonate diffuser
- Tamper resistant screws supplied as standard
- Dimmable, emergency, self-test, black body (including any specified RAL colour) available
- Linear anti ligature luminaire suitable for surface mounting. Efficacy upto 143 Llm/cW and IK10 steel body with tamper resistant screws



CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE	EFFICACY Llm/cW
LCLAL15W49S40	Fixed Output	4870	34W	143
LCLAL15W49E40	Fixed Output + Emergency	4870	34W	143
LCLAL15W49D40	Digital Dimmable	4870	34W	143
LCLAL15W98S40	Fixed Output	9740	68W	143
LCLAL15W98E40	Fixed Output + Emergency	9740	68W	143
LCLAL15W98D40	Digital Dimmable	9740	68W	143

Product Drawing

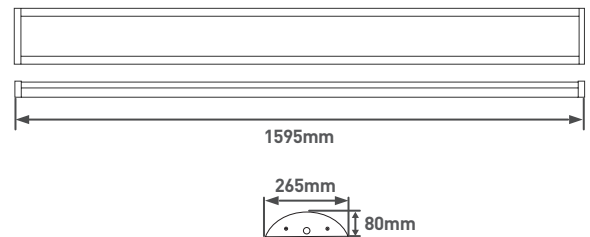

PRODUCT OPTIONS

Emergency Self-Test	Insert EST , eg. LCLAL15W49 EST 40
Black Body	Insert B , eg. LCLAL15 B 49S40

CAT NO.	WEIGHT (kg)	CRI	FREQUENCY (Hz)	IK RATING	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)
LCLAL15W49S40	7.7	>80	50-60	IK10+	-20 - +25	25
LCLAL15W49E40	7.3	>80	50-60	IK10+	0 - +25	25
LCLAL15W49D40	7.8	>80	50-60	IK10+	-20 - +25	25

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 60598-2-22	Luminaires – Emergency
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

