

## ECO SLIMLINE WORK LIGHTS

### Product Features

- IP rated light heads with high efficiency long life LED chips
- Lightweight aluminium adjustable steel stand and multi fixing leg position
- Tough 3 metre H05RN-F rubber cable tripod, and 1.5 metre H05RN-F cable for portable worklight
- Individual weatherproof power switch to each LED head



### Tripod


CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE
EFLD TT20B50	Fixed Output	2 x 1600	2 x 20W
EFLD TT50B50	Fixed Output	2 x 4000	2 x 50W

### Portable work light

CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE
EFLD W10B50	Fixed Output	800	10W
EFLD W30B50	Fixed Output	2400	30W



### Product Drawing

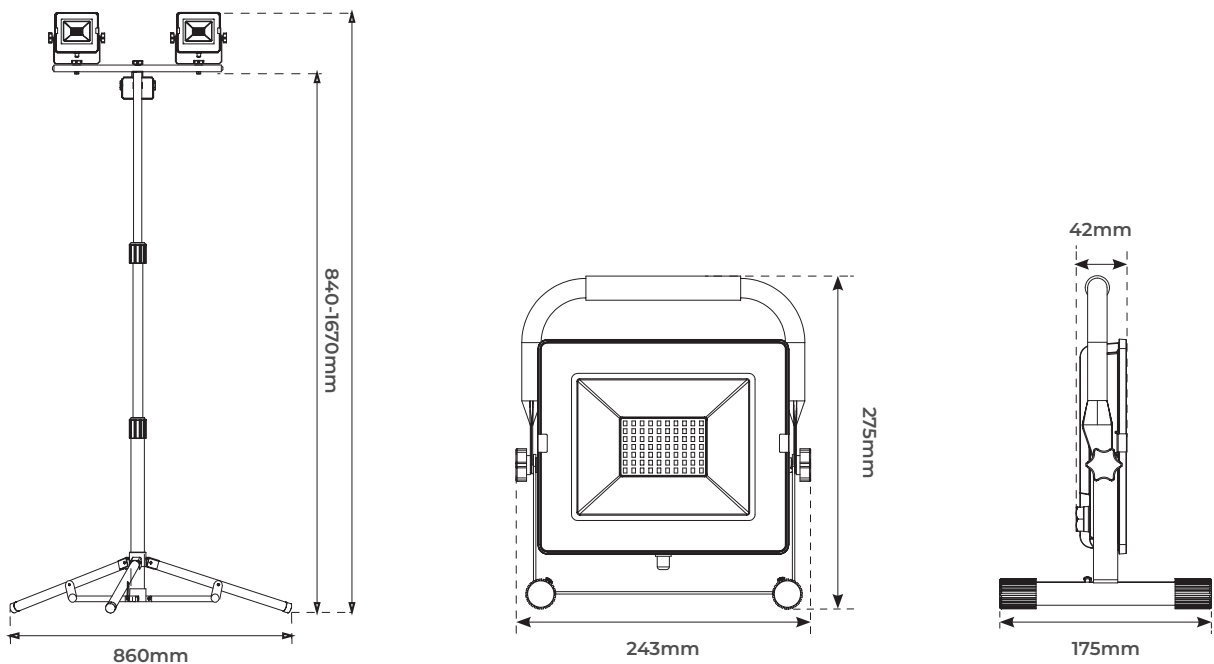

CAT NO.	WEIGHT (kg)	CRI	FREQUENCY (Hz)	IK RATING	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE
EFLDTT20B50	4.1	>80	50-60	IK06	-20 to +45	25	L70 / B50
EFLDTT50B50	5.1	>80	50-60	IK06	-20 to +45	25	L70 / B50
EFLDW10B50	0.7	>80	50-60	IK06	-20 to +45	25	L70 / B50
EFLDW30B40	0.9	>80	50-60	IK06	-20 to +45	25	L70 / B50

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-4	Luminaires – Portable
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

