
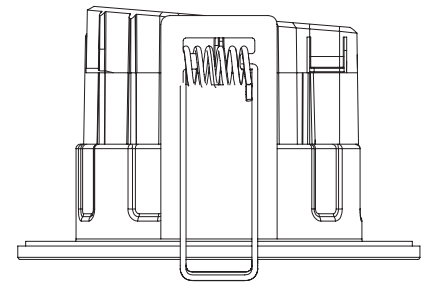


# FType ESSENCE FIRE RATED LED DOWNLIGHT

## Product Features

- Trade rated toolless SpeedFit connector - loop in/out piano key terminals for solid or stranded cable.
- QuickView Cable Window for ease of inspection - check wire connections to terminals after cables secured in place.
- Low profile design for shallow ceiling voids.
- Super slim bezel design for flawless unobtrusive finish.
- Supplied with removable polycarbonate Matt White bezel - ideal for when decorating and painting ceilings.
- Fire tested in 30, 60 and 90 minute solid timber joist, & 30 minute i-joists.
- Acoustic and Air leakage rated.
- Polished Chrome, Brushed Steel & Matt Black bezel accessory available.

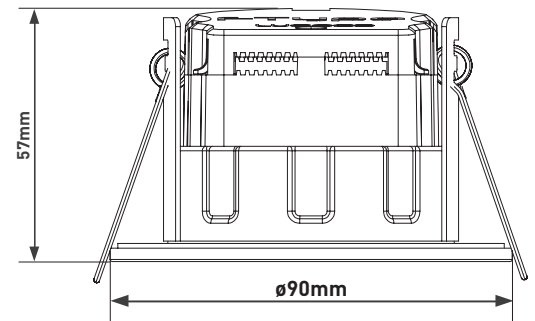

CAT NO.	WATTAGE	COLOUR TEMPERATURE	LUMINAIRE LUMEN	USEFUL LUMENS
EFTF5W30	5W	3000K	515lm (3000K)	414lm (3000K)
EFTF5W40	5W	4000K	550lm (4000K)	438lm (4000K)

CAT NO.	BEZEL TYPE	LUMINAIRE LUMENS PER WATT	CRI	BEAM ANGLE	FREQUENCY (V/Hz)	CURRENT	POWER FACTOR	AMBIENT TEMP RATED LIFE (°C)
EFTF5W30	Flat	103lm/W	>80	60°	220-240 / 50-60	23mA	>0.9	25°C
EFTF5W40	Flat	110lm/W	>80	60°	220-240 / 50-60	23mA	>0.9	25°C