


# FType ULTRA POWER CHANGE 4W/6W DIM2WARM CCT FIRE RATED LED DOWNLIGHT & CONNECTOR

## Product Features

- Power Selectable 6W/4W & Colour Selectable 3000K/4000K - Dim2Warm technology as standard
- Benefit from better lighting to create that cosy space. Adjusts colour temperature as you dim to create that warm tone associated with traditional dimmed filament and halogen lighting. The more you dim, the warmer the glow. Note: FType can also be installed with standard light switch. Default 100% brightness in selected colour and wattage setting.
- Patent pending toolless Easy Access ClipFit connector with true 1st/2nd Fix installation. QuickView Cable Window - check wire connections after locking lid shut. UK Patent Pending No. 2305019.8.
- Removable VDE certified push-fit terminal block improves wire access – ideal with stiff cable. 18th edition 500V insulation resistance testing compatible.
- Supplied with removable Matt White slim bezel -ideal for when decorating and painting ceilings.
- Available in Flat, Regressed and Adjustable in Polished Chrome, Brushed Steel & Matt Black bezel finish.

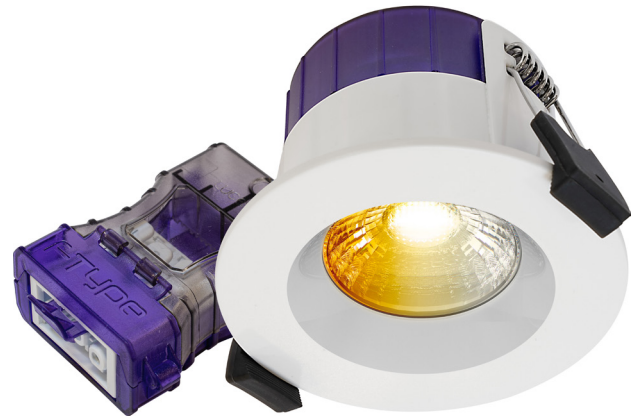

<b>4W &amp; 6W LED</b>	<b>LED CHIP &gt;135<sup>+</sup></b> lumens per watt	<b>Dimmable</b>	<b>60°</b> Beam Angle	<b>76mm</b> Cutout
<b>30,60,90 MINS</b> Fire Rated	<b>I-JOIST COMPLIANT</b>	<b>ACOUSTIC PART E</b>	<b>AIR LEAKAGE PART C</b>	<b>IP65</b> Rating
<b>INSULATION COVERABLE</b>	<b>50K</b> Hours	<b>COLOUR CHANGE</b>	<b>POWER CHANGE</b>	<b>7</b> YEAR Warranty

CAT NO.	WATTAGE	COLOUR CHANGE TEMPERATURE	LUMINAIRE LUMEN	USEFUL LUMENS
UTF6WD2W	4W / 6W	Dim2Warm 3000-2400K* 4000K	425 / 675lm (3000K)	333 / 523lm (3000K)
UTR6WD2W			460 / 690lm (4000K)	357 / 536lm (4000K)
UTA6WD2W				

CAT NO.	BEZEL TYPE	LUMINAIRE LUMENS PER WATT	CRI	BEAM ANGLE	FREQUENCY (V/Hz)	CURRENT	POWER FACTOR	AMBIENT TEMP RATED LIFE (°C)
UTF6WD2W	Flat	106 / 113lm/W (3000K)	>80	60°	220-240 / 50-60	22mA / 30mA	>0.9	25°C
UTR6WD2W	Regressed	115 / 115lm/W (4000K)						
UTA6WD2W	Adjustable							

\* Dim2Warm only active in 3000K setting on dimmer switch. FType can also be installed with standard light switch. Default 100% brightness in selected colour and wattage setting.

