

SIERRA BULKHEAD

Product Features

- Decorative interior bulkhead ideal for commercial applications
- Polished Chrome trim accessory available, white as standard
- Polycarbonate base and diffuser for increased durability
- Microwave control and emergency versions available




CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE
LBSR33W12S40	Fixed Output	1200	15W
LBSR33W12E40	Fixed Output + Emergency	1200	15W
LBSR33W20S40	Fixed Output	2000	24W
LBSR33W20E40	Fixed Output + Emergency	2000	24W

Product Accessories

CAT NO.	DESCRIPTION
LBSRTPC	Polished chrome trim





Product Drawing

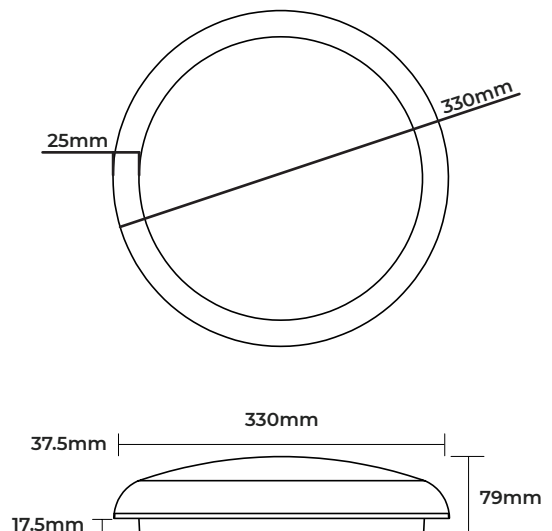

PRODUCT OPTIONS	
Microwave Control	LBSR33WxxS40MW
Microwave and Emergency	LBSR33WxxE40MW

CAT NO.	WEIGHT (kg)	EFFICACY (lm/W)	CRI	FREQUENCY (Hz)	UGR	IK RATING	TEMP RANGE (°C)	AMBIENT TEMP RATED LIFE (°C)	L/B RATED LIFE
LBSR33W12S40	0.99	80	>80	50-60	<23	IK08	-20 to +30	25	L70 / B50
LBSR33W12E40	1.29	80	>80	50-60	<23	IK08	0 to +30	25	L70 / B50
LBSR33W20S40	0.99	83	>80	50-60	<24	IK08	-20 to +30	25	L70 / B50
LBSR33W20E40	1.29	83	>80	50-60	<24	IK08	0 to +30	25	L70 / B50

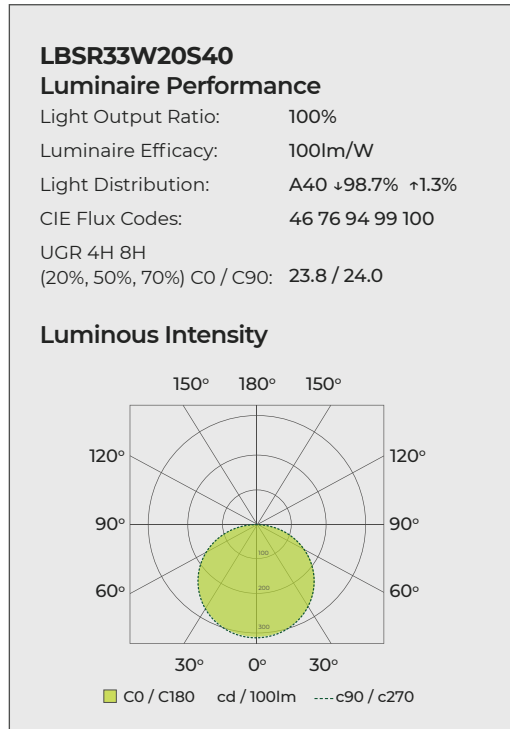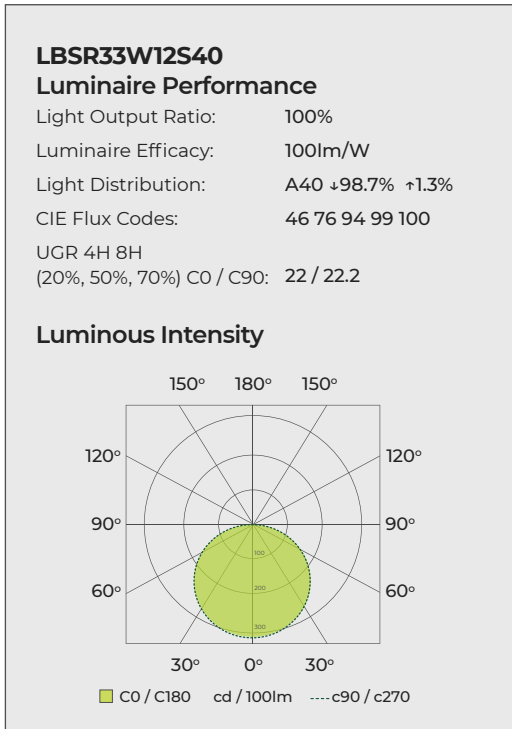

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 60598-2-22	Luminaires – Emergency
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

