

CLIMATE ESSENCE

Product Features

- Power Change, 4ft, 5ft & 6ft body each switchable between High/Low output
- 4ft & 5ft version with switchable Colour Temperature available
- Plug and play emergency pack and MicroWave sensor
- Speedfit diffuser
- 20mm conduit entry at each end




CAT NO.	DRIVER	LUMINAIRE LUMENS	WATTAGE	COLOUR TEMP
ECL12OL40	Fixed Output	2400-4800	20-40W	4000K
ECL15OL40	Fixed Output	3000-6000	25-50W	4000K
ECL18OL40	Fixed Output	4100-8400	34-70W	4000K
ECL12OLCC	Fixed Output	2400-4800	20-40W	3000-4000-6500K
ECL15OLCC	Fixed Output	3000-6000	25-50W	3000-4000-6500K

Product Drawing

CAT NO.	DESCRIPTION
UEM2W	Plug and play emergency pack
UMWS	Plug and play MicroWave sensor

PRODUCT OPTIONS	
DALI Digital Dimmable	Insert D , eg. ELCL15O30 D 40

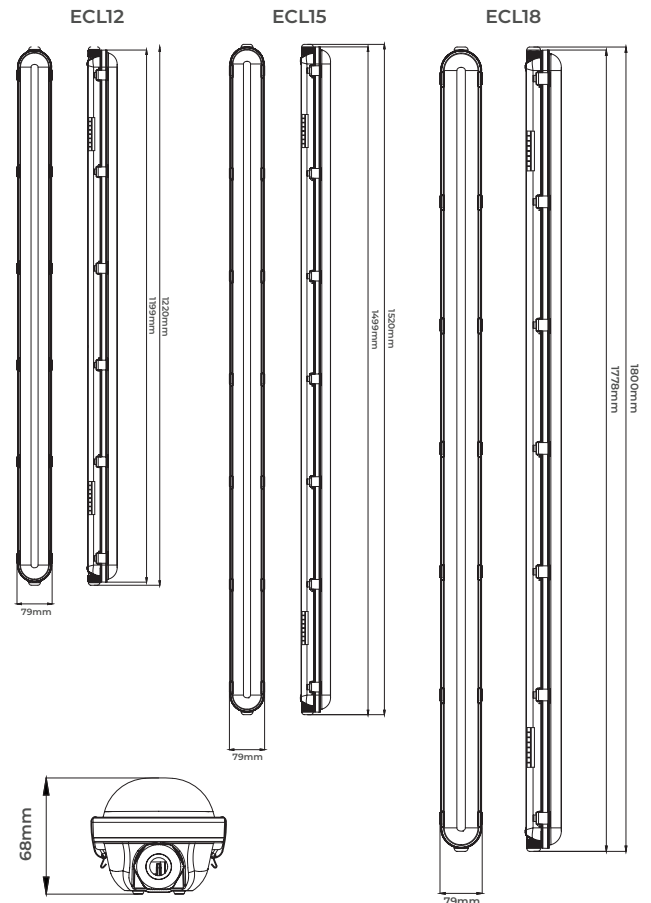

CAT NO.	WEIGHT (kg)	Llm/W	CRI	FREQUENCY (Hz)	IK RATING	TEMP RANGE (°C)	L/B RATED LIFE	FIXING CENTRES
ECL12OL40	9.7	120	>80	50 - 60	IK06	-20 to +40	L70 / B50	800mm
ECL15OL40	12	120	>80	50 - 60	IK06	-20 to +40	L70 / B50	1200mm
ECL18OL40	14.5	120	>80	50 - 60	IK06	-20 to +40	L70 / B50	1400mm
ECL12OLCC	9.7	120	>80	50 - 60	IK06	-20 to +40	L70 / B50	800mm
ECL15OLCC	12	120	>80	50 - 60	IK06	-20 to +40	L70 / B50	1200mm

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 60598-2-22	Luminaires – Emergency
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits – for harmonic current emissions
EN 61000-3-3	Limits – Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

