


FTYPE EMERGENCY PACK

Product Features

- · For use with all FTypes Essence, Mk2, Ultra
- · Maintained 3 hour emergency
- · Hinged 180° design allows for installation in the smallest of ceiling voids
- · Supplied with LED Indicator
- · Retrofittable to make any FType downlight emergency



Product Drawing

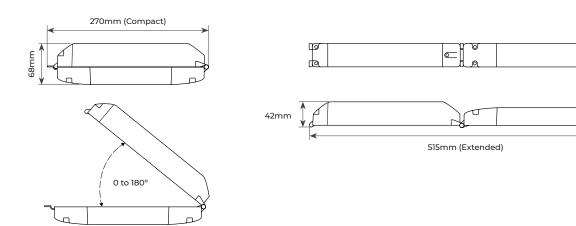

CAT NO.	INPUT VOLTAGE	FREQUENCY (Hz)	LED OUTPUT VOLTAGE RANGE	BATTERY TYPE	IP RATING	AMBIENT TEMP RANGE (°C)	EARTH LEAKAGE CURRENT	WEIGHT	BATTERY SECTION (LxWxH mm)
FT3EP24	230V +/- 10%	50/60	70V to 250V DC	NIMH	IP20	10 - 35°C	<0.5mA	0.8ka	255 x 42 x 42



42mm

30mm