


AquatiClear Conversion Kit Instructions

Kits 993211, 993212, 993213, 993214, 993215




Whole sacrificial anode



NOTE While performing a conversion to an AquatiClear build, check the status of the sacrificial anode and replace if it has deteriorated halfway or more.

PARTS INCLUDED

ID	Description	Qty	Part No.
A	Prop stop	1	440630
B	AquatiClear prop guard	1	993210
C	1/4"-20 x 1-1/2" hex head screw	3	475695
D	Retaining clip	3	140312
E	1/4"-20 serrated flange nut	3	840538
F	Propeller (2400)	1	240180
F	Propeller (3400)	1	340135
F	Propeller (4400)	1	440435
G	1/2" washer	1	997125
H	1/2"-20 x 1" hex head screw	1	243410
I	1/2"-20 waxed jam nut (3400EC only)	2	342058

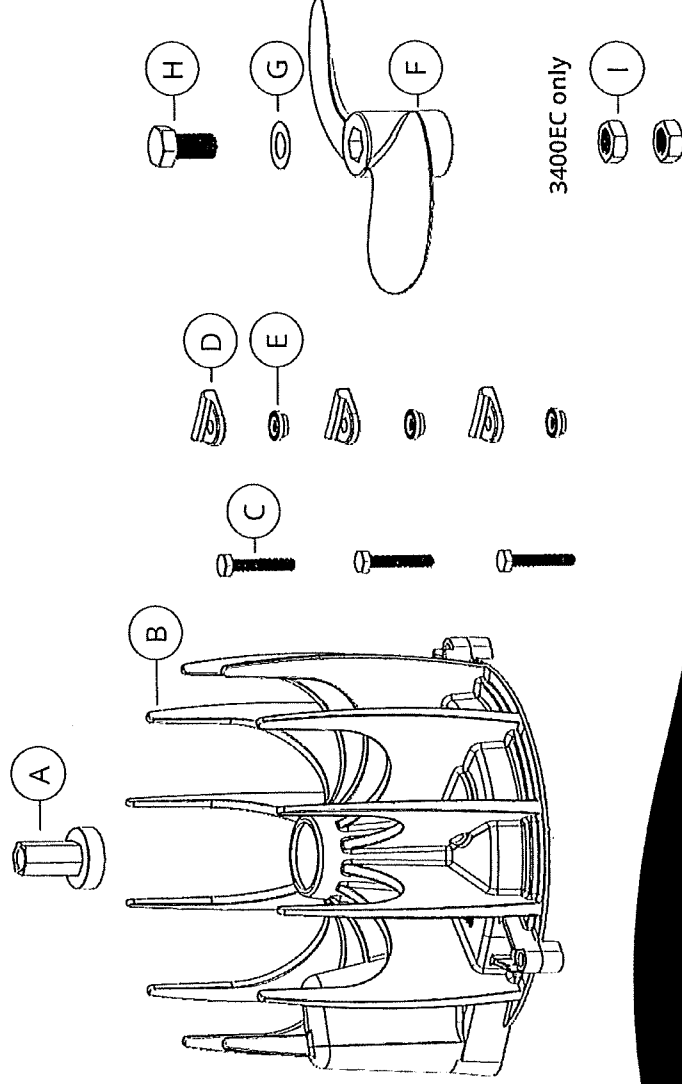

Kasco®

800 Deere Rd., Prescott, WI 54021

| 715.262.4488


| sales@kascomarine.com

| kascomarine.com


DOCUMENT 824407

CONVERSION INSTRUCTIONS


- 1 Detach the cord from the cage clasp and remove the cage hardware.

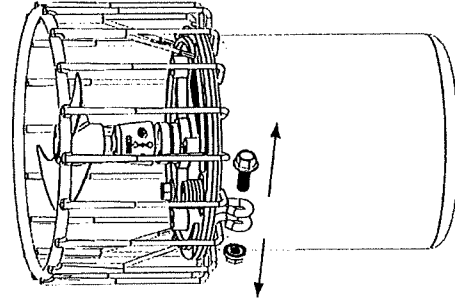

- 2 Squeeze six cage tines away from the unit to loosen the cage. Remove the cage by sliding it down the can. Pull the entire length of the cord through the cage.

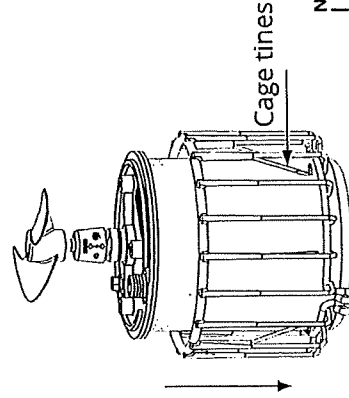


- 3 Remove the prop (and jam nut, if included) and thread the prop stop (A) onto the shaft.

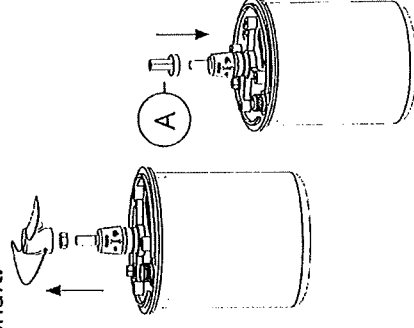


NOTE For 3400EC units, install the two jam nuts (I) on the end of the shaft before installing the prop stop.


- 4 Aligning the cord cover over the cord, fit the AquatiClear prop guard (B) over the prop stop.

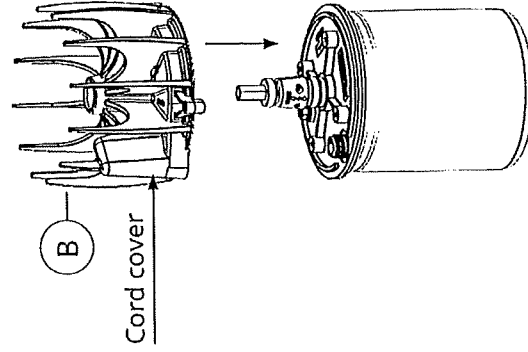


- 5 Secure the prop guard to the unit using the three 1.5" screws (C), retaining clips (D), and nuts (E).



Always tighten the nut opposite the cord cover first and then proceed in a counterclockwise direction.



- 6 Slip the new prop (F) onto the prop stop, followed by a washer (G) and 1" screw (H).

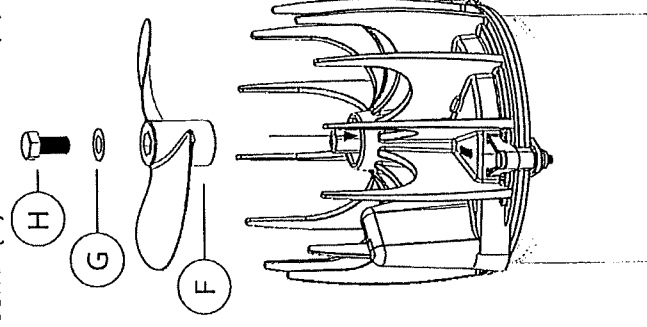

Kasco

800 Deere Rd. Prescott, WI 54021

715.262.4488

sales@kascomarine.com

kascomarine.com

DOCUMENT 824407