Retrofit Projects

MOSER GLASER

Retrofit Bushings – Replacement Bushings:
(lead times 12-14 weeks)









Retrofit Projects

MOSER GLASER

Retrofit Bushings = Replacement Bushings:

special designs possible



















Retrofit Projects


MOSER GLASER

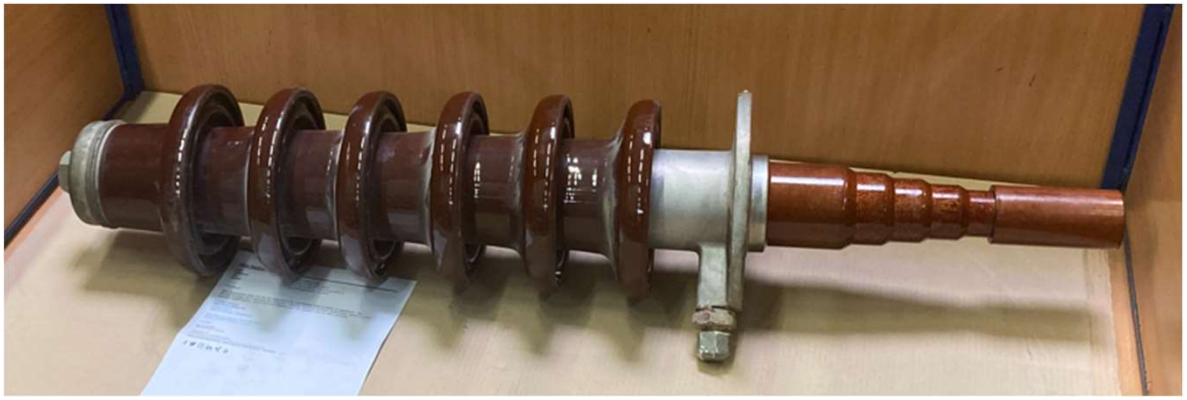

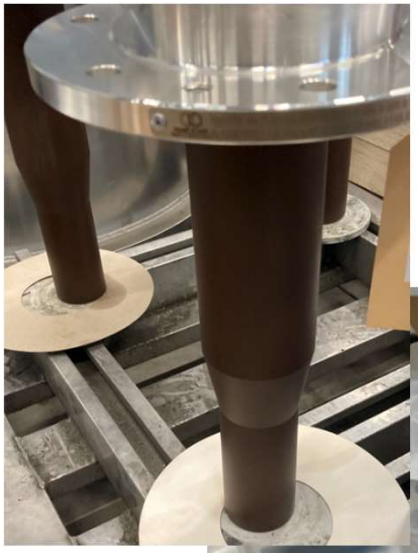





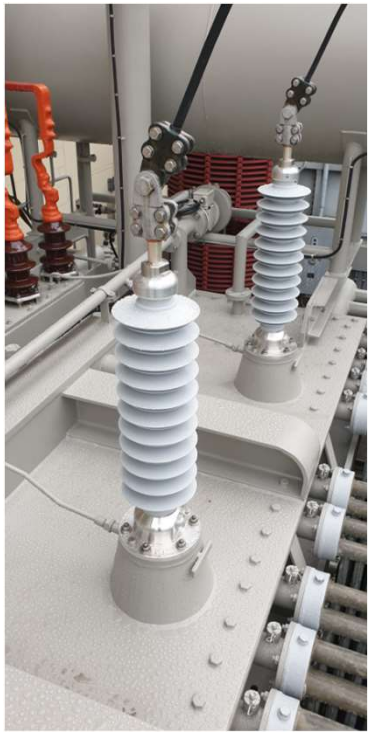

Retrofit Projects

MOSER GLASER

Retrofit Bushings = Replacement Bushings:

OIP replaced by MGC RIP





Components of Bushing

MOSER GLASER

- Conductor Types:
  - Draw Lead
  - Removable/split conductor
  - Fix Conductor
  - Flexible top connection designs possible
- Creepage Distance (typical 31mm/kV)
- Each MGC Bushing equipped with Test Tap
- Customized Flange sizes upon customer's request
- Customized CT (BCT) extensions e.g. 0, 100, 300, 500mm
- Flexible under flange oil length available
- Flexible bottom oil connection designs available:
  - round, flat pad, flat pad terminals
- Transportation and Mounting Angles 0°…90°
- Ambient Temperature ranges -40 / +40°C (-55 / +55°C on request)

