


## CUS900 SERIES

### STOCK CABINET UNIT HEATER

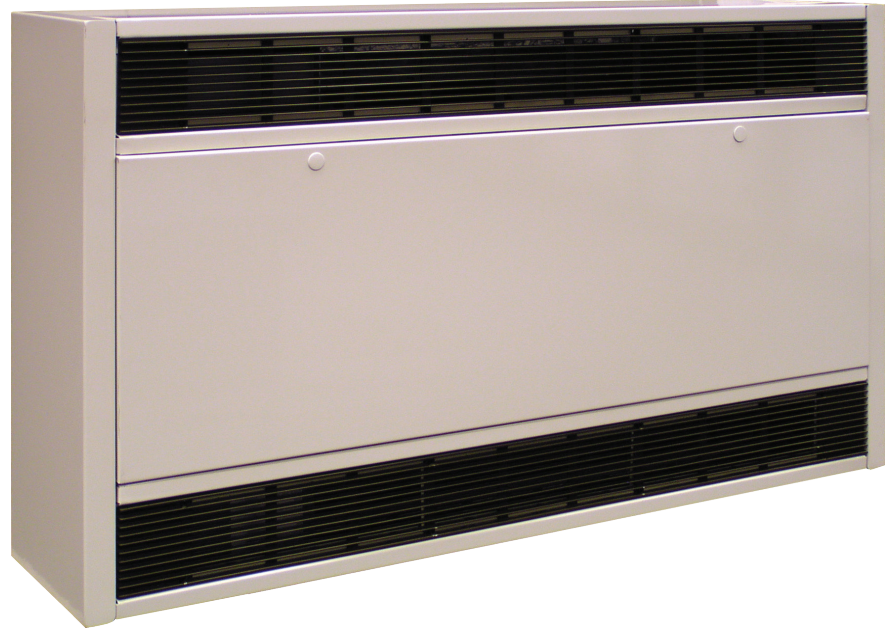

#### IDEAL SPACES

- School Hallways
- Churches
- Transportation Terminals
- Stairwells
- Entrance Ways
- Vestibules
- Lobbies
- Mechanical Rooms

#### COLORS

- Beige

#### DIMENSIONS

- 35" or 45" L x 26-3/8" H x 9-7/8" D

#### TEMP RANGE

- 60°– 85°F

#### CFM

- 200 – 500

#### LEAD TIMES

- 5 Days^

- Terminals for direct connection to BAS or EMS
- Built in disconnect switch and thermostat
- Field-convertible units available or voltage specific
- High/low heat setting
- All 3-phase heaters have balanced heating load
- Two cabinet sizes – 35 in. and 45 in.



[www.qmarkmep.com](http://www.qmarkmep.com)

For Technical Services, Call 800-642-4328

ITEM# QFLY\_CUS900\_0518-1




## CUS900 SERIES STOCK CABINET UNIT HEATER

MODELS & SPECIFICATIONS											
CATALOG NO.	UPC	KW		CFM		DIMENSIONS	MOTOR	FANS	WT. (LBS.)	VOLTS/PH.	AMPS
		HI	LO	HI	LO						
<b>NON-FIELD CONVERTIBLE MODELS (VOLTAGE SPECIFIC)</b>											
CUS93505271FFNC	6 85360 16511 0	5	3.3	250	200	35"W x 26-3/8"H x 9-7/8"D	1	1	120	277V/1	18.0
CUS93505483FFNC	6 85360 16513 4									480V/3	6.0
CUS94510271FFNC	6 85360 16515 8	10	6.7	500	400	45"W x 26-3/8"H x 9-7/8"D	1	1	160	277V/1	36.0
CUS94510483FFNC	6 85360 16517 2									480V/3	12.0
<b>CONVERTIBLE MODELS</b>											
CUS93505203FF*	6 85360 01791 4	5	3.3	250	200	45"W x 26-3/8"H x 9-7/8"D	1	2	120	208V/3	14.0
CUS93505243FF*	6 85360 01792 1									240V/3	12.0
CUS93505483FF*	6 85360 01793 8									480V/3	6.0
CUS93505603FF*^	6 85360 01794 5									600V/3	4.8
CUS94510203FF*	6 85360 01795 2	10	6.7	500	400	45"W x 26-3/8"H x 9-7/8"D	1	2	160	208V/3	34.0
CUS94510243FF*	6 85360 01796 9									240V/3	15.0
CUS94510483FF*	6 85360 01797 6									480V/3	12.0
CUS94510603FF*^	6 85360 01798 3									600V/3	9.0

NOTE: \*Factory supplied 208V or 240V, 3PH field convertible to 1 PH, 480V 3 PH convertible to 277V 1 PH, 600V 3 PH convertible to 347V 1 PH. \*\*Amps shown are 3 PH, High heat operation. Field Convertible to 1PH. ^600V units have a 20-day lead time.

ACCESSORIES				
CATALOG NO.	DESCRIPTION	COMPATIBLE WITH	FUNCTION	SHIP WT. (LBS)
CU935RTK	Ceiling or Wall Recess Trim Kit	CU935	Provides a neat finish to semi-recessed or full recessed application.	3
CU945RTK		CU945		4
CU935BK	Floor/Toe-Space Base Kit	CU935	16 gauge, muted black base is recessed from the heater front and sides to provide an attractive and practical floor mounting application.	9
CU945BK		CU945		10
CU935AWL	100% Outside Air, Exterior Aluminum Wall Louver	CU935	Used on exterior of masonry or panel walls of 2-3/4 in. or greater to provide a finished exterior For heaters 100% outside dampers.	5
CU945AWL		CU945		6
CU935WF	Permanent, Reusable Washable Filter	CU935	Replaces standard filter Washable filter can be cleaned and replaced.	4
CU945WF		CU945		6

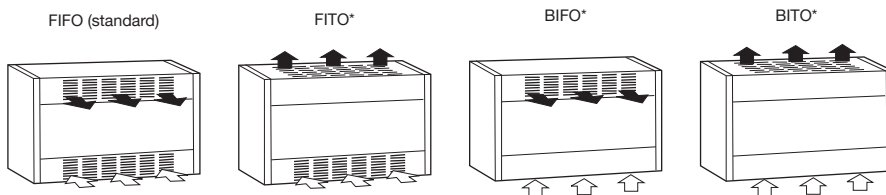

\*Field conversion needed