



TRYGG

A product by Nøsted &



FOREST

www.trygg.no

PRODUCT CATALOGUE 2022-2023

TABLE OF CONTENT



PRODUCT	PAGE
FORESTRY CHAINS	3
- Gigant	4
- Gigant 1	4
- U-Grip	5
- Satyr	5
- Fixed Ring	6
- Tight Ring	6
- SMT	7
- SM2D	8
- Super Standard	9
- Super Tight	10
- Super Dual Triple	11
- Super Snake	12
- Bull Horn	13
- Parts & Tools of chains	14
TRACKS	15
- Tyr Grip	16
- Frigg Allround	18
- Driva Float	20
- Parts & Tools of tracks	22

BRAVE EQUIPMENT FOR ROUGH TERRAIN



FORESTRY CHAINS

The forest has always had a special place in our hearts. This has resulted in a wide range of thoroughly tested forest chains for all purposes.

TRYGG forest chains are well known for a superb grip and long service life. The chains are available in several patterns and wire gauges. Please see more about forest chain, specifications and prices in our TRYGG product catalog.

PRODUCT COMPARISON

	GIGANT	SATYR	U-GRIP	SM2D	RING CHAIN
Grip, ice	****	***	***	*****	***
Grip, terrain	****	****	****	****	****
Side wall protection	*****	****	*****	***	**
Tread protection	*****	****	****	****	***
Weight	***	***	***	***	***

GIGANT

BESTSELLER!

Gigant U is our most popular forest chain. With an aggressive grip and stable design the chain offers a long service life. The chain is available in 16 mm triple diamond pattern for cut to length machinery and a double diamond pattern in 16 or 19 mm for skidders.



DETAILS

TRYGG's welding technology, placement of the U-studs and curing method give 30-40% longer life to this chain than other similar forest chains. The extra wide U-studs are welded under the horizontal chain link joints and is kept upright throughout the life of the chain.

TIRE	DIM	ITEM NR.
600/55-26,5	DD 16 mm	623376
700/70-34	TD 16 mm	623319
710/45-26,5_700/50-26,5	TD 16 mm	623361
710/55-34_700/55-34	TD 16 mm	623364

TIRE	DIM	ITEM NR.
710/70-34	TD 16 mm	623321
750/55-26,5	TD 16 mm	623333
780/50-28,5	TD 16 mm	623336
800/40-26,5	TD 16 mm	623335

The table shows the most used dimensions.
For more dimensions, visit our product selector on www.trygg.no

GIGANT 1

TRYGG GIGANT 1 has a single diamond pattern compared to TRYGG giant-u and is therefor perfect for smaller forestry chains. Alloy steel deep case hardening ensures durability and long service life.



DETAILS

TRYGG's welding technology, placement of the U-studs and curing method give 30-40% longer life to this chain than other similar forest chains. The extra wide U-studs are welded under the horizontal chain link joints and is kept upright throughout the life of the chain.

TIRE	DIM	ITEM NR.
600/55-26,5	SD 16 mm	623076
700/70-34	SD 16 mm	623019
710/45-26,5_700/50-26,5	SD 16 mm	623061
710/55-34_700/55-34	SD 16 mm	623063

TIRE	DIM	ITEM NR.
710/70-34	SD 16 mm	623021
750/55-26,5	SD 16 mm	623033
780/50-28,5	SD 16 mm	623036
800/40-26,5	SD 16 mm	623035

The table shows the most used dimensions.
For more dimensions, visit our product selector on www.trygg.no

U-GRIP

A very popular chain with a good grip, good stability and long service life. U-studs are welded to the horizontal chain links and are kept upright throughout the life of the chain. Triple diamond pattern in 13 or 16 mm.



DETAILS

Oversized studs for longer durability. Welded link connections stiffen the mesh pattern and keep studs upright.

TIRE	DIM	ITEM NR.
600/65-34	TD 16 mm	621378
700/45-22,5_710/40-22,5	TD 13 mm	621204
710/45-22,5_710/40-22,5 Fk F2	TD 13 mm	621206
710/40-24,5	TD 13 mm	621209
710/45-24,5	TD 13 mm	621210
710/45-26,5_700/50-26,5	TD 13 mm	621261

TIRE	DIM	ITEM NR.
710/45-26,5_700/50-26,5	TD 16 mm	621361
710/55-34_700/55-34	TD 16 mm	621363
750/55-26,5	TD 16 mm	621333
780/50-28,5	TD 16 mm	621336
800/40-26,5	TD 16 mm	621335

The table shows the most used dimensions.

For more dimensions, visit our product selector on www.trygg.no

SATYR

A chain that fits very well on the tire while having a good grip. No need for tension chain or rim rings, which simplifies installation and re tightening. The chain has a self-cleaning effect to let soil and twigs escape.



DETAILS

Two "V-shaped" studs on each grouser ensure traction and long service life.

TIRE	ITEM NR.
710/40-24,5	507309
710/45-26,5_700/50-26,5	507361
710/55-34_700/55-34	507364
750/55-26,5	507333
780/50-28,5	507336
800/40-26,5	507335

The table shows the most used dimensions.

For more dimensions, visit our product selector on www.trygg.no

FIXED RING

The original Ring Chain design, developed from horseshoes that were welded to chains for better grip on agricultural tractors. Less rings per tire than a Tight Ring Chain make this an easier and cheaper type of Ring Chains. A cost-effective choice for lighter tasks, part-time forest workers and smaller skidders.



DETAILS

16 mm chain has 25 mm rings.
19 mm chain has 28 mm rings.

16 mm Fixed Ring Standard

TIRE	WEIGHT/PAIR	ITEM NR.
16,9-30	210	630240
18,4-26	210	630240
16,9-34	255	630250
18,4-30	255	630250
16,9-38	302	630251
18,4-34	302	630251

TIRE	WEIGHT/PAIR	ITEM NR.
23,1-26	330	630265
28,1-26	385	630274
700/55-34	325	630274
24,5-32	352	630270
30,5-32	392	630280
700/70-34	392	630280

The table shows the most used dimensions.
For more dimensions, visit our product selector on www.trygg.no

TIGHT RING

More rings provide better grip. Close spaced rings and heavy components ensure dependability in all conditions. Preferred option for tough operations, professional forest workers and larger skidders.



DETAILS

16 mm chain has 25 mm rings.
19 mm chain has 28 mm rings.

16 mm Tight ring

TIRE	WEIGHT/PAIR	ITEM NR.
16,9-30	231	631140
18,4-26	231	631140
16,9-34	275	631150
18,4-30	275	631150
16,9-38	310	631151

TIRE	WEIGHT/PAIR	ITEM NR.
18,4-34	310	631151
23,1-26	360	631165
24,5-32	424	631170
30,5-32	474	631180
700/70-34	474	631180


The table shows the most used dimensions.
For more dimensions, visit our product selector on www.trygg.no

SMT

BESTSELLER!

TRYGG SMT is our most popular chain for heavy operations. It is aggressive all purpose chain for all types of off road conditions. The continuous pattern gives even traction and a smooth ride. The link interlocking keeps the studs straight up and creates a minimum of chain and tire wear.

Alloy steel, deep case hardened ensures durability and long service life.



DETAILS

TRYGG SMT has oversized studs, ie a larger diameter than the chain link. This gives longer life and better grip.

9,5 mm

TIRE	WHEEL	ITEM NR.
5.5	25	603903
17.5	25	603911
20.5	25	603908
14.00	24/25	603906

11 mm

TIRE	WHEEL	ITEM NR.
15.5	25	605760
17.5	25	605762
20.5	25	605764
23.5	25	605766
14.00	24/25	605780
16.00	24/25	605781

13 mm

TIRE	WHEEL	ITEM NR.
20.5	25	606764
23.5	25	606766
26.5	25	606768
16.00	24/25	606781
18.00	24/25	606782

16 mm


TIRE	WHEEL	ITEM NR.
23.5	25	608766
26.5	25	608768
600/65	34	608316

The table shows the most used dimensions.

For more dimensions, visit our product selector on www.trygg.no

SM2D

SM2D gives an extreme grip and stability from massive amount of studs gripping the terrain at all times. Tight mesh coverage protects tires from wear and damage. The chain performs extremely well on steep icy terrain. Deep case hardened alloy steel ensures durability and long service life.



DETAILS

TRYGG SM2D has oversized studs which gives longer life and better grip.

TIRE	DIM	ITEM NR.
20,5-25	11	615764
23,5-25	11	615766
23,5-25	13	616766
26,5-25	13	616768
29,5-25	11	616772
29,5-25	16	618772

The table shows the most used dimensions.
For more dimensions, visit our product selector on www.trygg.no

SUPER STANDARD

TRYGG Super series is our most popular transport chain. It is made from a superior steel quality which is used in all parts of the chain. The technology allows us to reduce the weight while maintaining the renowned TRYGG quality. The chain has 8 mm hardened hooks, 6 mm hardened side chain and 7 mm specially hardened cross chains with 7x9 mm square studs. It weighs 25% less than the original design. Cam rails are optional.



DETAILS

The square studs offer a number of advantages such as a larger hardening surface, sharp edges also on worn studs. 8 mm hardened hook, grade 8 side chain strength and 7 mm case hardened cross links added i.a. boron, manganese and nickel for optimal durability and toughness at the same time.

TIRE	WHEEL	ITEM NO.
33x12.50	15	490201
8,25	16	490063
225/85	16	490053
235/85	16	490063
245/75	16	490072
255/85	16	490083
280/85	16	490183
33x12.50	16,5	490201
35x12.50	16,5	490202
315/80	16,5	490392
8,75	16,5	490052
37x15.50	17	490203
8.5R	17,5	490053
205/75	17,5	490052
215/70	17,5	490052
225/75	17,5	490053
235/75	17,5	490063
245/70	17,5	490073
245/75	17,5	490073
265/70	17,5	490182
15R	19,5	490413
235/70	19,5	490073
245/70	19,5	490083

TIRE	WHEEL	ITEM NO.
265/70	19,5	490084
285/70	19,5	490187
295/70	19,5	490392
295/75	19,5	490392
305/70	19,5	490392
295/70*	19,5	490392
295/75*	19,5	490392
305/70*	19,5	490392
385/65	19,5	490413
9.00	20	490364
10.00	20	490374
11,00*	20	490384
12	20	490385
13,50	20	490416
14,00	20	490416
15,5/80	20	490425
365/80	20	490424
10R	22,5	490364
11R	22,5	490374
12R	22,5	490384
13R	22,5	490385
11/70*	22,5	490373
12R*	22,5	490384

TIRE	WHEEL	ITEM NO.
12R* BB	22,5	490394
275/70*	22,5	490373
275/80	22,5	490374
285/80	22,5	490374
295/60*	22,5	490392
295/70*	22,5	490383
295/80*	22,5	490384
295/80* WB	22,5	490394
305/60	22,5	490392
305/70*	22,5	490393
315/60*	22,5	490383
315/70*	22,5	490393
315/75*	22,5	490384
315/80*	22,5	490394
315/80* ** WB	22,5	490395
350/75	22,5	490424
365/80	22,5	490425
385/55	22,5	490413
385/65	22,5	490424
12,00	24	490386
305/75*	24,5	490384
315/75*	24,5	490394

* Can be replaced by 490384 or 490394.

WB = wider base

The table shows the most used dimensions.

For more dimensions, visit our product selector on www.trygg.no



SUPER TIGHT

TRUCK DRIVER'S FAVORITE!

The same as TRYGG Super, although with more cross chains than regular version! That gives improved grip. It is made of superior quality steel, which is used in all parts of the chain. Our technology allows us to reduce the weight maintaining the renowned TRYGG quality. Oversized studs provide up to 25% larger wear surface than regular snow chains.

Cam rails are optional.



DETAILS

The square studs offer a number of advantages such as a larger hardening surface, sharp edges also on worn spikes and thus better grip. 8 mm hardened hook, grade 8 strength side chain and 7 mm case hardened cross links added boron, manganese and nickel for optimal durability and toughness at the same time.

TIRE	WHEEL	ITEM NO.
8,25	15	492063
225/75	16	492071
235/85	16	492063
245/85	16	492073
280/85	16	492183
315/80	16	492392
235/75	17,5	492063
245/70	17,5	492073
295/75*	19,5	492392
235/70	19,5	492073
265/70	19,5	492084
285/70	19,5	492187
295/75	19,5	492392
305/70*	19,5	492392
10*	20	492374

TIRE	WHEEL	ITEM NO.
11,00*	20	492384
12,00	20	492385
275/60	20	492084
365/80	20	492424
11R	22,5	492374
11R* WB	22,5	492384
11/70*	22,5	492373
12R* WB	22,5	492394
13R	22,5	492385
13R WB	22,5	492395
275/70*	22,5	492373
275/80*	22,5	492374
285/75*	22,5	492374
295/60*	22,5	492392
295/70*	22,5	492383

TIRE	WHEEL	ITEM NO.
295/80*	22,5	492384
295/80* WB	22,5	492394
305/60*	22,5	492392
305/70*	22,5	492393
315/60*	22,5	492383
315/70*	22,5	492393
315/75*	22,5	492384
315/80*	22,5	492394
315/80 WB	22,5	492395
435/65	22,5	492446
445/65	22,5	492446
14,00	24	492408
315/75*	24,5	492394

* Can be replaced by 492384 or 492394.
WB = wider base

The table shows the most used dimensions.
For more dimensions, visit our product selector on www.trygg.no



SUPER DUAL TRIPLE

TRYGG Super series is our most popular transport chain. It is made from a superior steel quality which is used in all parts of the chain. The technology allows us to reduce the weight while maintaining the renowned TRYGG quality. The chain has 8 mm hardened hooks, 6 mm hardened side chain and 7 mm specially hardened cross chains with 7x9 mm square studs. It weighs 25% less than the original design. Cam rails are optional.



DETAILS

The square studs offer a number of advantages such as a larger hardening surface, sharp edges also on worn spikes and thus better grip. 8 mm hardened hook, grade 8 side strength chain and 7 mm case hardened cross links added i.a. boron, manganese and nickel for optimal durability and toughness at the same time.

TIRE	WHEEL	ITEM NO.
10,00	20	494374
11	20	494384
11R	22,5	494374
12R	22,5	494384
275/80	22,5	494374
295/80	22,5	494384

TIRE	WHEEL	ITEM NO.
295/80 TETT	22,5	494884
315/70	22,5	494393
315/80	22,5	494394
315/80 TETT	22,5	494894
315/75	24,5	494394

The table shows the most used dimensions.


For more dimensions, visit our product selector on www.trygg.no



SUPER SNAKE

SUPER SNAKE – steering chain

Super Snake is a very popular chain in Canada and USA. It is a comfortable chain to drive with and it secures that you always have chain against the road.



DETAILS

The "Snake" pattern provides good traction as well as lateral control and a smooth ride.

TIRE	WHEEL	DIM	ITEM NO.
12R	22,5	7	449222
295/80	22,5	7	449384
315/80	22,5	7	449394
385/55	22,5	7	449413
385/65	22,5	7	449424

TIRE	WHEEL	DIM	ITEM NO.
12R	22,5	8	459222
295/80	22,5	8	459384
315/80	22,5	8	459394
385/55	22,5	8	459413
385/65	22,5	8	459424

The table shows the most used dimensions.

For more dimensions, visit our product selector on www.trygg.no



BULL HORN

For long Log hauls, the 8mm square chain with "bull horn" studs is the choice of the pros. The short link square chain and powerful studs provide long service life and the added strength. Z pattern gives continuous ground contact with good grip and directional stability. The smart sliding tensioner provides flexible fitting to several tire sizes – regardless of the manufacturer and type.



DETAILS

For dual tires the Bull Horn is specially designed for left and right hand installation. Each chain is packed separately and has unique part numbers.



ITEM NR.	TIRE	LEFT/RIGHT	MODEL		S / DT	DIM	UNIT
469500	315/70-22,5	L	TRYGG, zz+zz, u-studs	bz/bz	Dual triple	8 mm	1/2 pair
469501	315/70-22,5	R	TRYGG, zz+zz, u-studs	bz/bz	Dual triple	8 mm	1/2 pair
469503	315/80-22.5	L	Trygg ladder + ladder	stand/stand	Dual triple	8 mm	1/2 pair
469504	315/80-22.5	R	Trygg ladder + ladder	stand/stand	Dual triple	8 mm	1/2 pair
469505	11.00-20, 12-22.5, 295/80-22.5, 315/80-22.5	L	TRYGG, ladder + zz, plain	z/stand	Dual triple	8 mm	1/2 pair
469506	11.00-20, 12-22.5, 295/80-22.5, 315/80-22.5	R	TRYGG, ladder + zz, plain	z/stand	Dual triple	8 mm	1/2 pair
469515	11.00-20, 12-22.5, 295/80-22.5, 315/80-22.5	L	TRYGG ladder + zz, u-stud	bz/stand	Dual triple	8 mm	1/2 pair
469516	11.00-20, 12-22.5, 295/80-22.5, 315/80-22.5	R	TRYGG ladder + zz, u-stud	bz/stand	Dual triple	8 mm	1/2 pair
469525	11.00-20, 12-22.5, 295/80-22.5, 315/80-22.5	L	TRYGG, zz+zz, u-studs	bz/bz	Dual triple	8 mm	1/2 pair
469526	11.00-20, 12-22.5, 295/80-22.5, 315/80-22.5	R	TRYGG, zz+zz, u-studs	bz/bz	Dual triple	8 mm	1/2 pair
475500	315/70-22.5	R+L	TRYGG zz, u-stud	bz	Single	8 mm	1 pair
475502	315/70-22.5	R+L	TRYGG zz, plain	z	Single	8 mm	1 pair
475505	11.00-20, 12-22.5, 295/80-22.5, 315/80-22.5	R+L	TRYGG zz, plain	z	Single	8 mm	1 pair
475515	11.00-20, 12-22.5, 295/80-22.5, 315/80-22.5	R+L	TRYGG zz, u-stud	bz	Single	8 mm	1 pair
475540	385/65-22.5	R+L	TRYGG zz, u-stud	bz	Single	8 mm	1 pair
475545	385/65-22.5	R+L	TRYGG zz, plain	z	Single	8 mm	1 pair

The table shows the most used dimensions. For more dimensions, visit our product selector on www.trygg.no



PARTS & TOOLS OF CHAINS

PIN CONNECTORS



Size: 5-10

Size: 13-22

Size	No. pr. pck.	Item nr.
Nr. 5 for 5-5,5 mm chain	4	520205-4
Nr. 6, for 6 mm chain	4	520206-4
Nr. 7, for 6-7 mm chain	4	520207-4
Nr. 8, for 7-8 mm chain	4	520208-4
Nr. 10, for 9,5-11 mm chain	3	520210-3
UNI 16, for 13-16 mm chain		520215
UNI 19, for 16-19 mm chain		520218
UNI 22, for 19-22 mm chain		520221

GALVANIZED SCHACKLE

Also delivered in premium



Dimension	Item nr.
3/16" - 5 mm	341050
1/4" - 6 mm	341065
5/16" - 8 mm	341080
3/8" - 10 mm	341100
7/16" - 11 mm	341110
1/2" - 13 mm	341130
9/16" - 14 mm	341140
5/8" - 16 mm	341160

TIGHTENING TOOL FOR IMPACT WRENCH

Hydraulic



350105

Description	Item nr.
Tightening tool for impact wrench	350105

INSTALLATION TOOL



350100

Description	Item nr.
Installation tool	350100


PIN CONNECTOR TOOLS



350005

Description	Item nr.
Pin connector tool, small	350005
Pin connector tool, large	350006

RIM LOCK



Description	Item nr.
Rim lock for 22,5" rim	336058
Rim lock for 24,5" rim	336059
Rim lock for 26,5" rim	336060
Rim lock for 28,5" rim	336061

TIGHTENING RAIL

Suitable for	Item nr.
8-9,5-11 mm	336030
13-16 mm	336040





**BRAVE EQUIPMENT
FOR ROUGH TERRAIN**

TRACKS

We present 3 different models adapted to the big challenges of the forest machines. We have developed tracks that have unique properties within

- Carrying capacity
- Grip / Climbing ability / Accessibility
- Snow and mud conditions

Our various tracks are designed with respect to reliable traction, gentleness to the surface, economical driving, tire protection and long service life. Having been through a flawless half year test period, we can now present a finished product that perfectly represents the TRYGG quality.

PRODUCT COMPARISON

	TYR GRIP	FRIGG ALLROUND	DRIVA FLOAT
Grip	***	**	*
Floatation	*	**	***
Stability on snow	***	**	

Read more about TRYGG TRACKS on www.trygg.no

TYR GRIP



TYR is an aggressive track for rocky terrain or in mud or deep snow during winter.



Crossbar



Linksystem



Cleat



Tracklock (3 sizes)

	Dim. mm	Length / height mm
Crossbar	48 x 48	750, 860, 900
Tracklock	26	105, 155, 205
Linksystem	26	
Cleat	50 x 30	50

Tyr comes with single cleat, but double cleat can be ordered.

TYR GRIP

ITEM NR.	ITEM NAME	VERSION	TIRE	BOGIE CC	CROSSBAR LENGTH	WEIGHT (kg)
670100	600 - 22,5 Single Stud	Std.	FKF2, TRS, TRS2, T428, A344	1300	740	1206
670101	600 - 22,5 Double Studs	Std.	FKF2, TRS, TRS2, T428, A344	1300	740	1241
670160	600 - 26,5 Single Stud	Std.	TRS, TRS2, T440, T480, A344	1500	740	1326
670161	600 - 26,5 Double Studs	Std.	TRS, TRS2, T440, T480, A344	1500	740	1362
670160	600 - 26,5 Single Stud	Std.	FKF2, FR, T428, A343	1500	740	1326
670161	600 - 26,5 Double Studs	Std.	FKF2, FR, T428, A343	1500	740	1362
670200	710 - 22,5 Single Stud	Std.	FKF, A331, A343	1300	850	1299
670201	710 - 22,5 Double Studs	Std.	FKF, A331, A343	1300	850	1335
670202	710 - 22,5 Single Stud	Std.	TRS, TRS2, A428, A344	1300	850	1299
670203	710 - 22,5 Double Studs	Std.	TRS, TRS2, A428, A344	1300	850	1335
670204	710 - 22,5 Single Stud	Std.	FKF2	1300	850	1299
670205	710 - 22,5 Double Studs	Std.	FKF2	1300	850	1335
670230	710 - 24,5 Single Stud	Std.	FKF, FKF2, A343	1430	850	1395
670231	710 - 24,5 Double Studs	Std.	FKF, FKF2, A343	1430	850	1431
670232	710 - 24,5 Single Stud	Std.	TRS2, T428, T440, T480, A344	1430	850	1395
670233	710 - 24,5 Double Studs	Std.	TRS2, T428, T440, T480, A344	1430	850	1431
670261	710 - 26,5 Single Stud	Std.	FKF, FKF2, FR, ELS, T428, T480, A342, A343, TIFF, TiHF2, FsB	1500	850	1491
670262	710 - 26,5 Double Studs	Std.	FKF, FKF2, FR, ELS, T428, T480, A342, A343, TIFF, TiHF2, FsB	1500	850	1527
670263	710 - 26,5 Single Stud	Std.	TRS, TRS2, T440, A344, TiGF	1500	850	1491
670264	710 - 26,5 Double Studs	Std.	TRS, TRS2, T440, A344, TiGF	1500	850	1527
670360	750 - 26,5 Single Stud	Std.	FKF2	1720	850	1744
670361	750 - 26,5 Double Studs	Std.	FKF2	1720	850	1780
670362	750 - 26,5 Single Stud	Std.	TRS, TRS2, T440, A344	1720	900	1744
670363	750 - 26,5 Double Studs	Std.	TRS, TRS2, T440, A344	1720	900	1780
670364	750 - 26,5 Single Stud with cross bar for 780	Std.	FKF2 new type	1710	900	1744
670365	750 - 26,5 Singel Pigg with cross bar for 780	Std.	FKF2 new type	1710	900	1780
670236	780 - 26,5 Single Stud	Std.	FKF	1720	900	1744
670237	780 - 26,5 Double Studs	Std.	FKF	1720	900	1780
670245	800 - 26,5 Single Stud	Std.	TRS2, A344	1500	900	1544
670246	800 - 26,5 Double Studs	Std.	TRS2, A344	1500	900	1544

FRIGG ALLROUND



FRIGG is an all-round track, gentle to the ground while providing good grip and good tire protection. With the all-round properties you do not sacrifice grip or protection for good load-bearing capacity.



Crossbar



Linksystem



Cleat



Tracklock (3 sizes)


	Dim. mm	Length / height mm
Crossbar	80 x 25	740, 850, 900
Tracklock	26	105, 155, 205
Linksystem	26	
Cleat	50 x 30	50

Tyr comes with single cleat, but doble cleat can be ordered.

FRIGG ALLROUND

ITEM NR.	ITEM NAME	VERSION	TIRE	BOGIE CC	CROSSBAR LENGTH	WEIGHT (kg)
670400	600 - 22,5 Single Stud	Std.	FKF2, TRS, TRS2, T428, A344	1300	740	1156
670401	600 - 22,5 Dobbel Pigg	Std.	FKF2, TRS, TRS2, T428, A344	1300	740	1192
670460	600 - 26,5 Single Stud	Std.	FKF, FKF2, T428, A343	1500	740	1326
670461	600 - 26,5 Double Studs	Std.	FKF, FKF2, T428, A343	1500	740	1362
670500	710 - 22,5 Single Stud	Std.	FKF, A331, A343	1300	850	1226
670502	710 - 22,5 Double Studs	Std.	FKF, A331, A343	1300	850	1262
670504	710 - 22,5 Single Stud	Std.	FKF2	1300	850	1226
670505	710 - 22,5 Double Studs	Std.	FKF2	1300	850	1262
670530	710 - 24,5 Single Stud	Std.	FKF, FKF2, A343	1430	850	1316
670531	710 - 24,5 Double Studs	Std.	FKF, FKF2, A343	1430	850	1352
670532	710 - 24,5 Single Stud	Std.	TRS2, T428, T440, T480, A344	1430	850	1316
670533	710 - 24,5 Double Studs	Std.	TRS2, T428, T440, T480, A344	1430	850	1352
670561	710 - 26,5 Single Stud	Std.	FK, FKF2, FR, ELS, T428, T480, A342, A343, TIFF, TiHF2, FsB	1500	850	1407
670562	710 - 26,5 Double Studs	Std.	FK, FKF2, FR, ELS, T428, T480, A342, A343, TIFF, TiHF2, FsB	1500	850	1443
670563	710 - 26,5 Single Stud	Std.	TRS, TRS2, T440, A344, TiGF	1500	850	1407
670564	710 - 26,5 Double Studs	Std.	TRS, TRS2, T440, A344, TiGF	1500	850	1443
670565	710 - 26,5 Single Stud (With 750 crossbar. Crossbar length 900mm)	Std.	Nokian FKF2 New tyre	1500	900	1642
670660	750 - 26,5 Single Stud	Std.	FKF2 (FKF2 new)	1720	850	1544
670661	750 - 26,5 Double Studs	Std.	FKF2 (FKF2 new)	1720	850	1580
670662	750 - 26,5 Single Stud	Std.	TRS	1720	900	1642
670663	750 - 26,5 Double Studs	Std.	TRS	1720	900	1678
670536	780 - 26,5 Single Stud	Std.	FKF	1720	900	1642
670537	780 - 26,5 Double Studs	Std.	FKF	1720	900	1678
671400	800 - 26,5 Single Stud	Std.	TRS2, A344	1500	900	1454
671401	800 - 26,5 Double Studs	Std.	TRS2, A344	1500	900	1489
671402	800 - 26,5 Single Stud	Std.	FKF	1500	900	1454
671403	800 - 26,5 Double Studs	Std.	FKF	1500	900	1489

DRIVA FLOAT

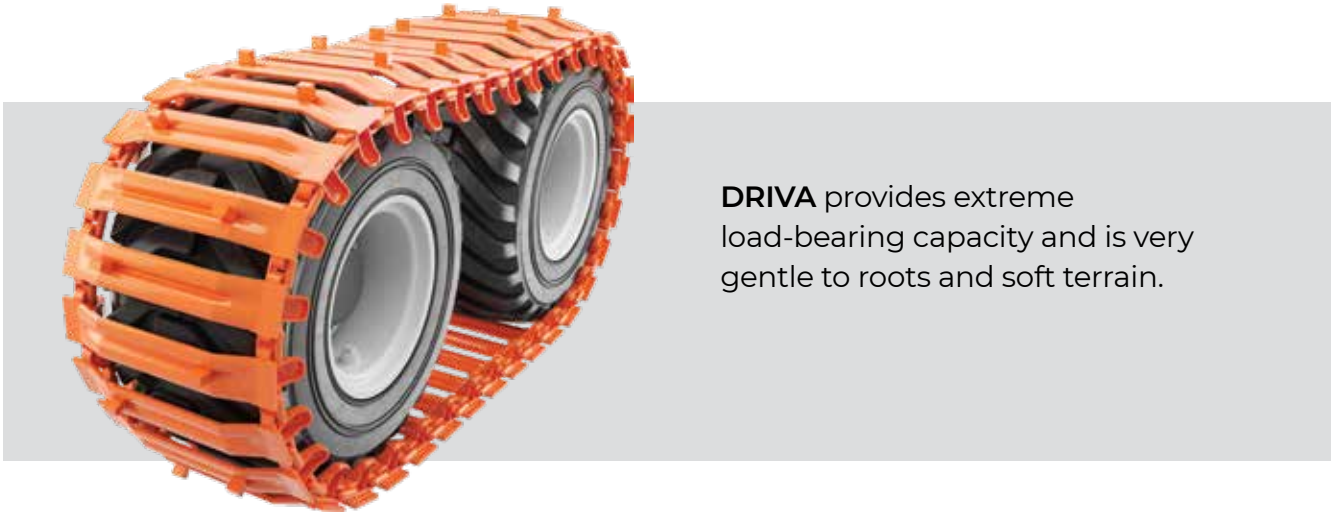

DRIVA provides extreme load-bearing capacity and is very gentle to roots and soft terrain.



Crossbar



Linksystem



Cleat



Tracklock (3 sizes)

	Dim. mm	Length / height mm
Crossbar	150 x 16	730, 850, 935
Tracklock	26	105, 155, 205
Linksystem	26	
Cleat	50 x 30	50

Tyr comes with single cleat, but double cleat can be ordered.

DRIVA FLOAT

ITEM NR.	ITEM NAME	VERSION	TIRE	BOGIE CC	CROSSBAR LENGTH	WEIGHT (kg)
670800	710 - 22,5 Single Stud	Std.	FKF, A331, A343	1300	850	1274
670801	710 - 22,5 Double Studs	Std.	FKF, A331, A343	1300	850	1310
670802	710 - 22,5 Single Stud	Std.	FKF2	1300	850	1274
670803	710 - 22,5 Double Studs	Std.	FKF2	1300	850	1310
670804	710 - 22,5 Single Stud	Std.	TRS TRS T428 A344	1300	850	1274
670805	710 - 22,5 Double Studs	Std.	TRS TRS T428 A344	1300	850	1310
670861	710 - 26,5 Single Stud	Std.	FK, FKF2, FR, ELS, T428, T480, A342, A343, TIFF, TiHF2, FsB	1500	850	1460
670862	710 - 26,5 Double Studs	Std.	FK, FKF2, FR, ELS, T428, T480, A342, A343, TIFF, TiHF2, FsB	1500	850	1496
670863	710 - 26,5 Single Stud	Std.	TRS, TRS2, T440, A344, TiGF	1500	850	1460
670864	710 - 26,5 Double Studs	Std.	TRS, TRS2, T440, A344, TiGF	1500	850	1496
671700	800 - 26,5 Single Stud	Std.	TRS2, A344	1500	935	1559
671701	800 - 26,5 Double Studs	Std.	TRS2, A344	1500	935	1595



PARTS & TOOLS OF TRACKS

ITEM NR.	ITEM NAME	DIM	DIST BTW CENTERS	WEIGHT	NUMBER
671110	Track lock 105	26 mm	105 mm	2,75 kg	Pcs.
671120	Track lock 155	26 mm	155 mm	3,9 kg	Pcs.
671130	Track lock 205	26 mm	205 mm	4,7 kg	Pcs.
671151	Track lock bolt	M14x55	-	0,1 kg	Pcs.
671152	Track lock nut	M14 DIN 980	-	0,03 kg	Pcs.



671110
671120
671130

ITEM NR.	ITEM NAME	LENGTH	WIDTH	HEIGHT	DIST BTW CENTERS	WEIGHT	NUMBER
671150	Track lock extension	120 mm	45 mm	50 mm	56 mm	1,5 kg	Pcs.



671150

ITEM NR.	ITEM NAME	INNER LENGTH	WIDTH	HEIGHT	THICKNESS	WEIGHT	NUMBER
671205	Link hook	169 mm	45 mm	67 mm	18 mm	2,1 kg	Pcs.




671205

ITEM NR.	ITEM NAME	DIST BTW CENTERS	WIDTH	INNER WIDTH	DIAMETER	WEIGHT	NUMBER
671210	Link	80 mm	88 mm	50 mm	26 mm	1,1 kg	Pcs.



671210

ITEM NR.	ITEM NAME	LENGTH	WIDTH	HEIGHT	WEIGHT	NUMBER
671350	Side support	62 mm	77 mm	120 mm	1,2 kg	Pcs.
671355	Cleat / stud	50 mm	30 mm	50 mm	0,4 kg	Pcs.



671350



671355

ITEM NR.	ITEM NAME	LENGTH (MIN/MAX)	WEIGHT	NUMBER
671410	Mounting tool TYR with clamps	155-470 mm	8 kg	1 + 2
671415	Mounting tool FRIGG with clamps	145-460 mm	8,3 kg	1 + 2
671420	Mounting tool DRIVA with clamps	170-490 mm	7,3 kg	1 + 2
671450	Mounting clamp	1120x50 mm	0,4 kg	Pair



671410




671415



671420

#tryggchains/ #tryggkjetting/ #tryggtracks





TRYGG is a recognized world leader in the field of chain production. Our products, made in Norway, are especially developed for users operating in extreme environments where reliability and safety is paramount.


Nøsted & AS
+47 38 27 25 50
post@trygg.no

Canada
+1 819 478 2425
christian.tracy@nosted.com


USA
+1 208 267 6215
dave.trygg@gmail.com

Lithuania
+370 699 38454
audrius.barsauskas@nosted.com

www.trygg.no

 Tryggkjetting

 @trygg_chains

 Nøsted&

 @nosted_and

Thank you for choosing TRYGG! Share your photos with us! #tryggchains #tryggkjetting

DEALER: