
Molteni&C

PHYSIS

VINCENT VAN DUYSEN, 2025



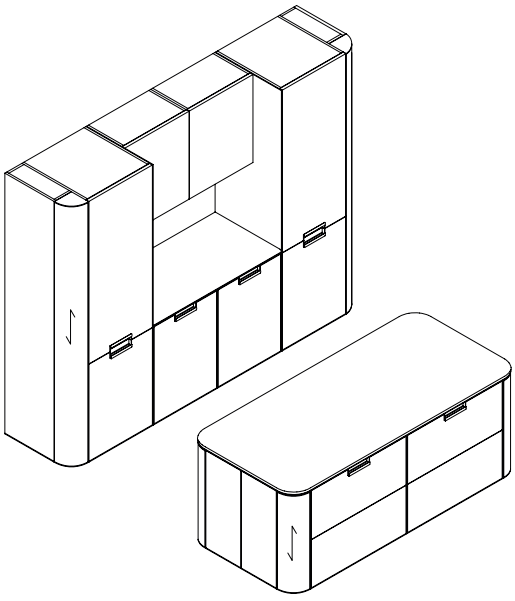

The Physis kitchen brings Vincent Van Duysen's organic sensibility to the heart of the home with a soft, contemporary architectural language. The formal identity of Physis is expressed through gently curved edges and sides, refined by a distinctive half-bullnose profile that enhances the worktop's sculptural quality. Meticulous attention to detail is evident throughout, from the perfectly integrated recessed handle to the softly contoured sink and snack counter. The thickness of the worktop is accentuated by a discreet metal insert that follows the continuity of the curved lines, reinforcing the sense of material continuity and visual softness. Open compartments and glass-fronted doors introduce transparency and lightness, creating a dialogue between solidity and openness that enhances spatial fluidity.

FINISHES

Island

hinoki base, rain forest green top, pewter matt lacquered doors, pewter handles skirting and frame

Columns

hinoki boiserie, rain forest green top and splashback, pewter handles skirting, frame and 6 mm panels


PLUSES

- Design Vincent Van Duysen

Molteni&C


Finger recess opening kitchen

H. unit structure = 801 mm
H. door = 797 mm
H. kitchen with 60 mm skirting = 861 mm
H. kitchen with 100 mm skirting = 901 mm
TH. door = 25 mm
TH. door with handle = 34 mm
D. Base = 331-595-745mm

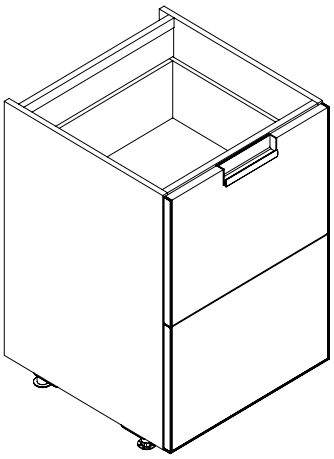


Abaco position handle


BASE UNITS




A
Base unit with pull-out door




B
Base unit with hinged door




C
Base unit with 2 pan drawers




D
Base unit with 2 drawers and 1 pan drawer



E
Base unit with 4 drawers





F
Corner base unit





G
Base unit with pull-out door W 300 mm

OVEN BASE










H
Jolly base unit mechanical push-pull opening

Iris
Pewter
Bronze




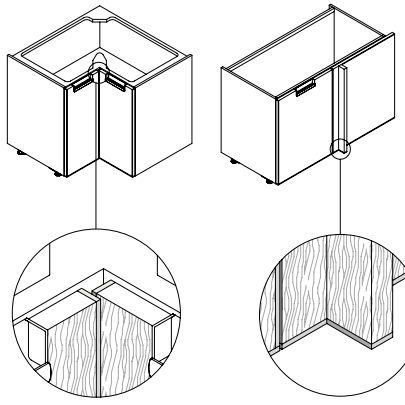

The corner upright is supplied unassembled for management of corners with irregular angles.

Abaco position handle


PANTRY COLUMN

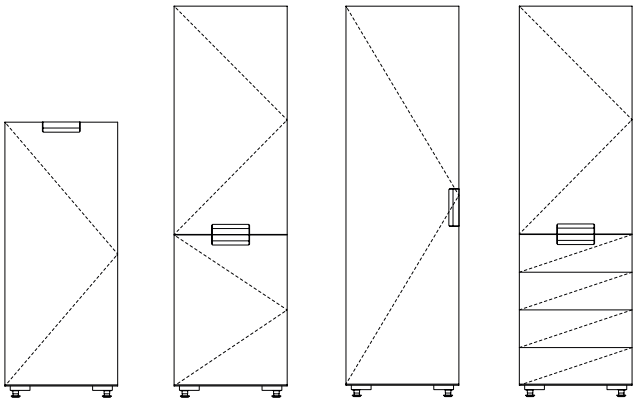

A
Column with hinged doors


B
Column with single hinged door

C
Column with with upper hinged door with lower drawers

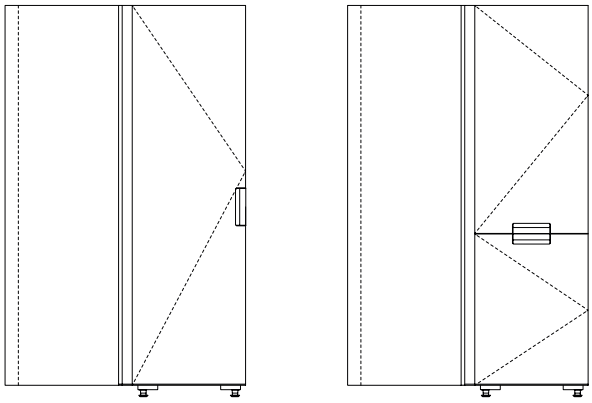


D
Corner column with single hinged door

E
Corner column with hinged doors

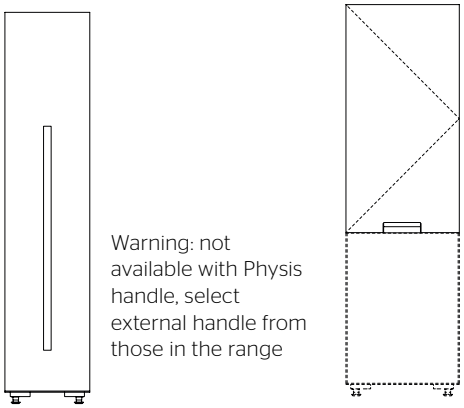

Warning: not available with Physis handle, select external handle from those in the range

F
Pull-out accessorised column

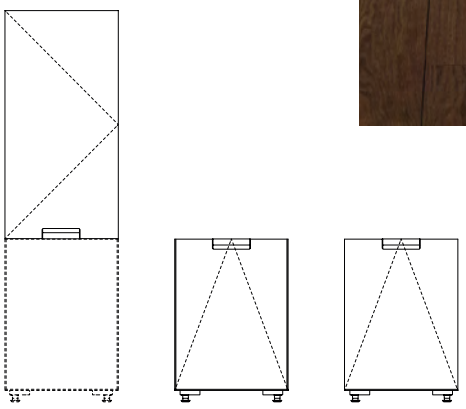


Suspended column over electrical appliance: the door on the appliance is supplied automatically with single lower profile in order to keep the correct design of the columns




Abaco position handle


OVEN COLUMNS




A
Column with hinged doors




B
Column with drawers and pan drawers



C
Oven column + microwave

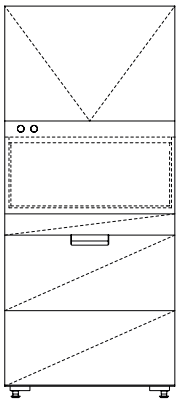

D
Oven column W 900 mm

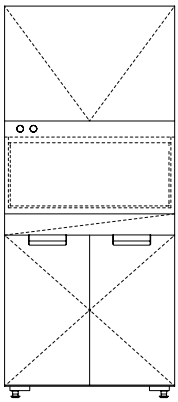


E
Oven column W 900 mm

Warning: the thickness of the oven doors may differ from the thickness of the kitchen doors




Abaco position handle


FRIDGE COLUMNS



A
Built-in fridge column
W 600/750 mm
double door




B
Built-in fridge column
W 600 mm
single door




C
Wine cabinet


Warning: not available with Physis handle, select external handle from those in the range

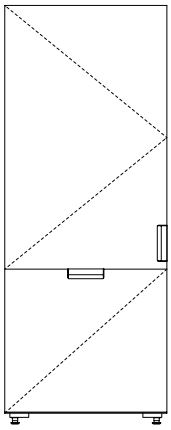

D
Fridge column
W 900 mm

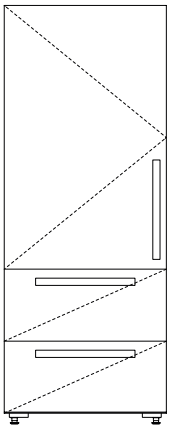

E
Fridge column
W 900 mm

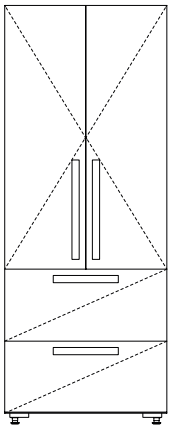


F
Fridge column
W 900 mm



End modules Physis

The end panels D 331 mm are supplied as fixed non-openable elements.

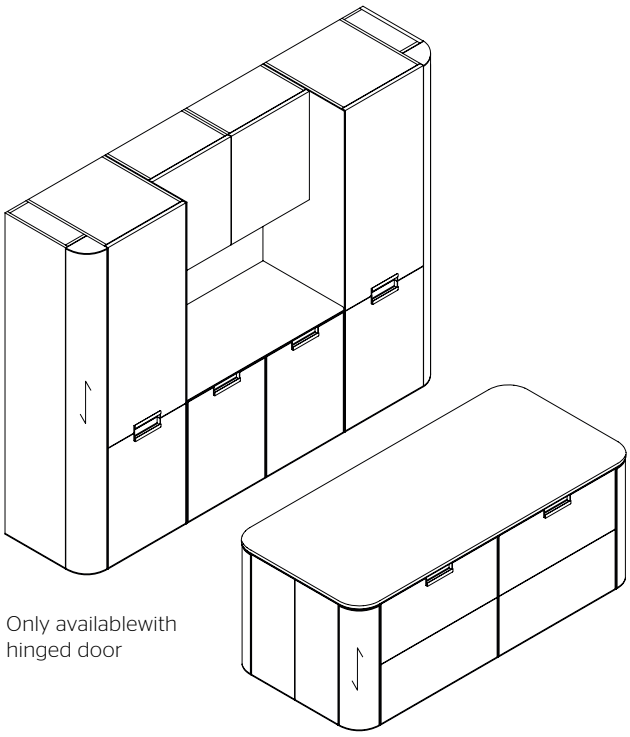


Only availablewith hinged door

Available as open moduleor unit with hinged door




6–18

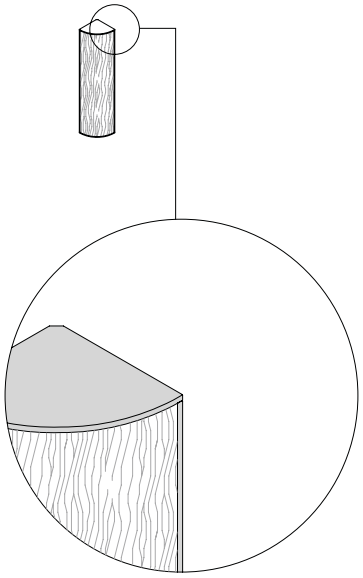


Finish for curved portion:
Matt lacquer
Wood (only with vertical grain)

Finishing profile:
Pewter
Iris
Bronze

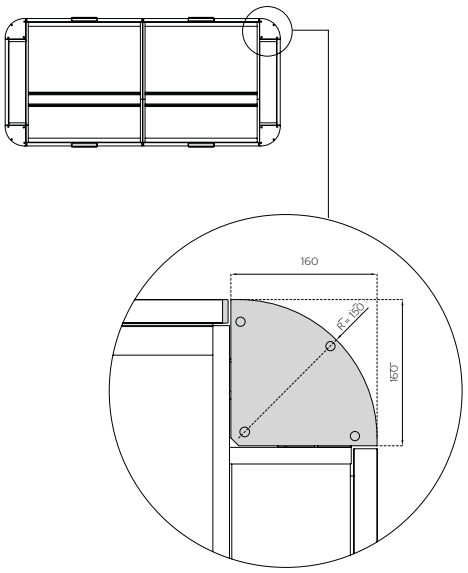

Open end module

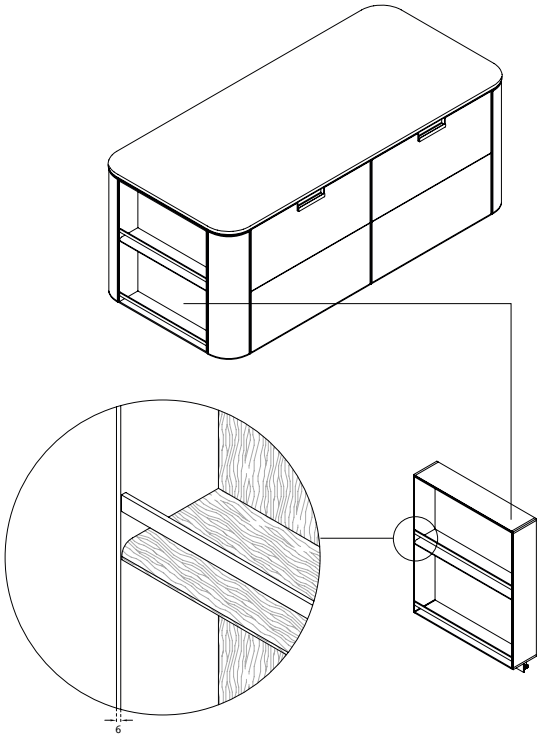




Body:
Aluminium in Iris
Pewter
Bronze

Back panel:
Matt lacquer
Wood

End terminal unit

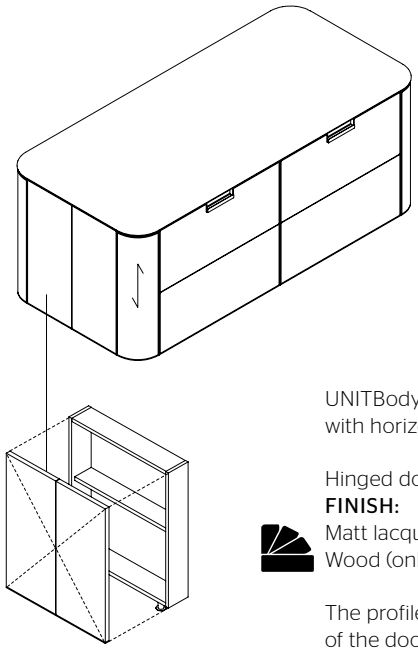

UNITBody: in the same finish as caseCompatible with horizontal internal lighting

Hinged doors with push-pull opening
FINISH:
Matt lacquer
Wood (only vertical grain)


The profile trim is applied only to the lower part of the door.
The middle shelf is fixed.

Physis end panel for columns

Note for the designer: the end panel for columns is supplied as a single element even when it is attached to compositions of columns with extension.

Between the curved element of the end panel and the adjacent column there is a 3 mm gap.

The designer is responsible for ensuring that the elements adjacent to the decorative panel are solidly fixed.

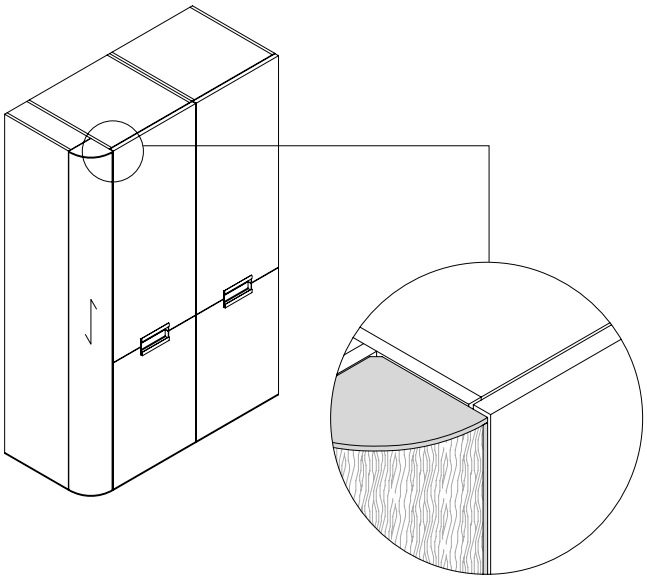





without extension	with extension H 361 mm	with extension H 608 mm	with extension H 722 mm
2009	2370	2617	2731
2123	2484	2731	2845
2256	2617	2864	2978

Decorative panel TH 6 mm

appliancesThe decorative panel TH 6 mm is supplied in special metallic lacquer, Iris, Pewter, or Bronze finish.The panel is obligatory between columns and base units (see example below). In addition to being a technical solution for hiding the unfinished ends on the worktop and the decorative profile ① it is also aesthetically pleasing as it matches the door profile trim.

An optional decorative panel to insert between wall units and extensions is supplied in the same finish. The panel must be positioned flush with the door on the extension

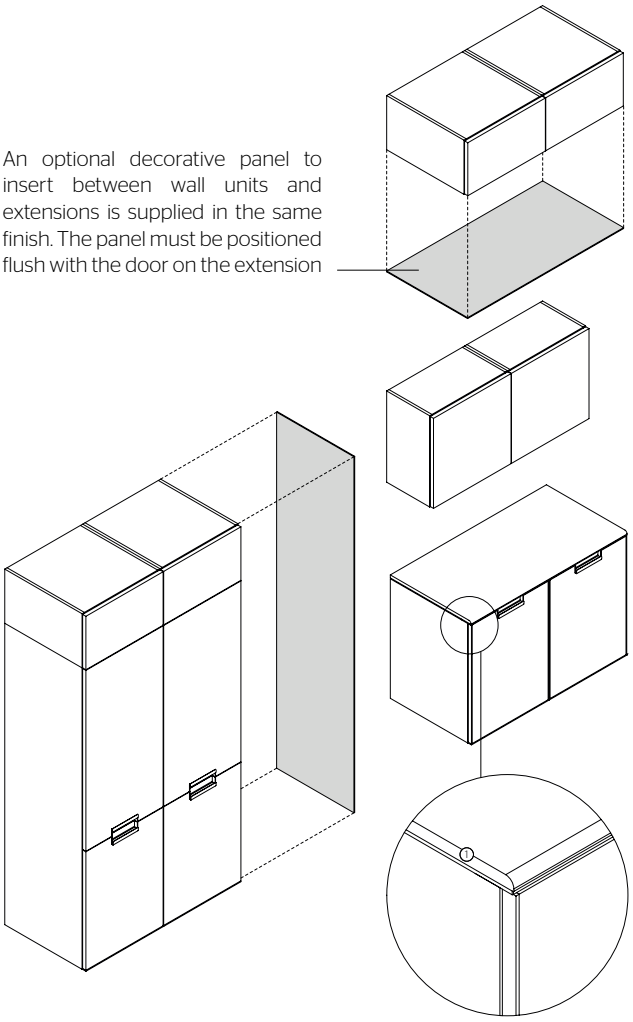


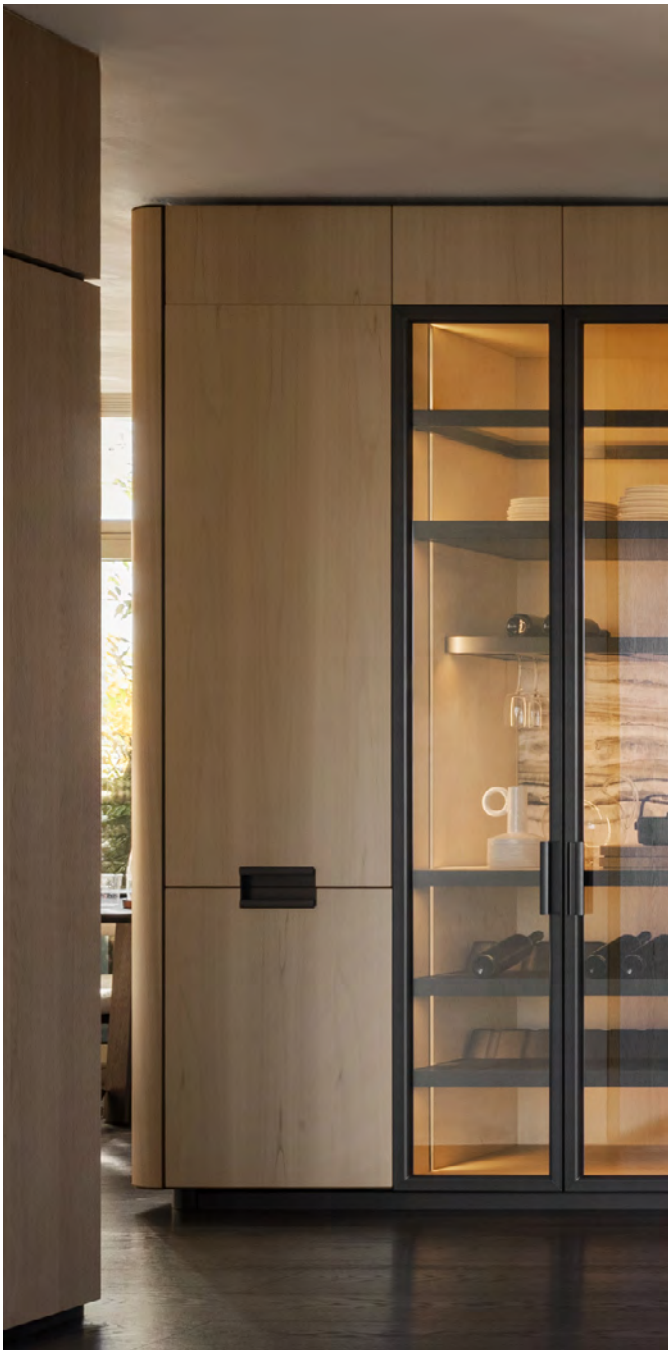

The designer is responsible for ensuring that the elements adjacent to the decorative panel are solidly fixed.
NO freestanding or pannelled appliances
NO doors (PT40 and Doorway System 7)
NO technical column on mechanism side
NO column with foldaway door on mechanism side
NO suspended columns over appliances

Panel for built-in fridge columns


TH 10 mm supplied in same finish as front piece D 200 mm

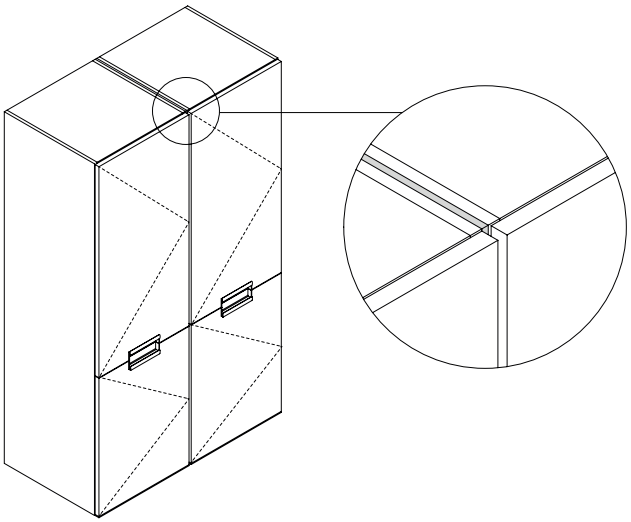




A 10 mm thick panel must be inserted on the hinge side next to all built-in fridge columns to allow correct rotation of the door.
Should it be forgotten, it will however be inserted into the order confirmation.

Note for the design: pay attention to fridge columns at ends of compositions. Below are the design limits to consider when the built-in appliance is at the end of a composition with the hinge side towards the outside.

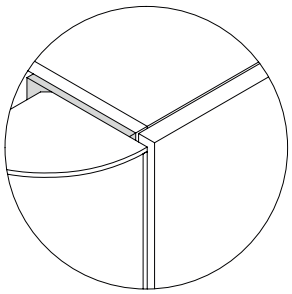


NO end panel TH 160 mm for columns.
The 10 mm thick panel compromises stability.

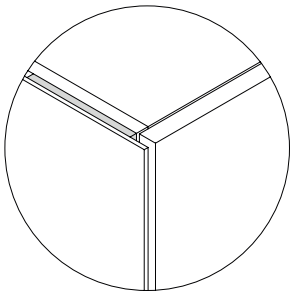

NO decorative panel TH 6 mm in end position.
The 10 mm thick panel compromises stability.

Note for designer

There is no end curved element for wall units.Pay attention to composition that end with base and wall units as per the example below.

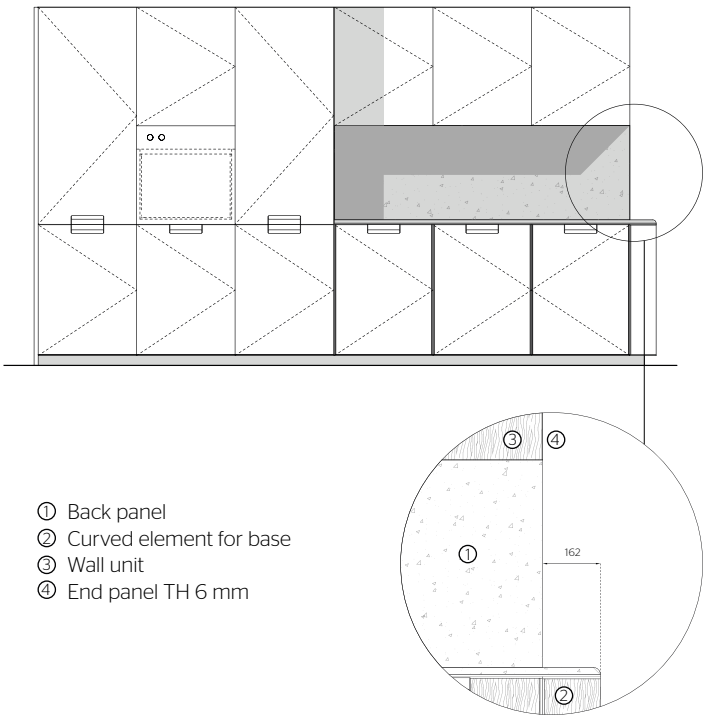



① Back panel
② Curved element for base
③ Wall unit
④ End panel TH 6 mm




Snack bar


Snack Top and support in wood, with trim profile in Iris, Pewter, or Bronze finish. The wood grain always runs perpendicular to the support.

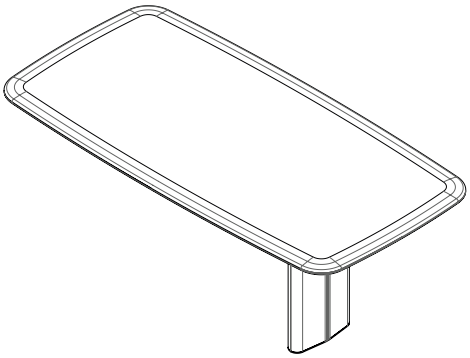

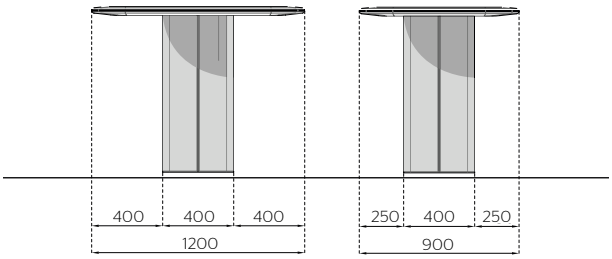

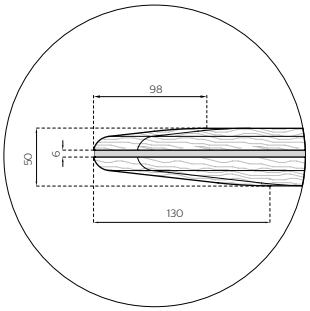

WARNING:
The lower and upper surfaces shape of the worktop have a different shape.
Reductions to fit are not possible.

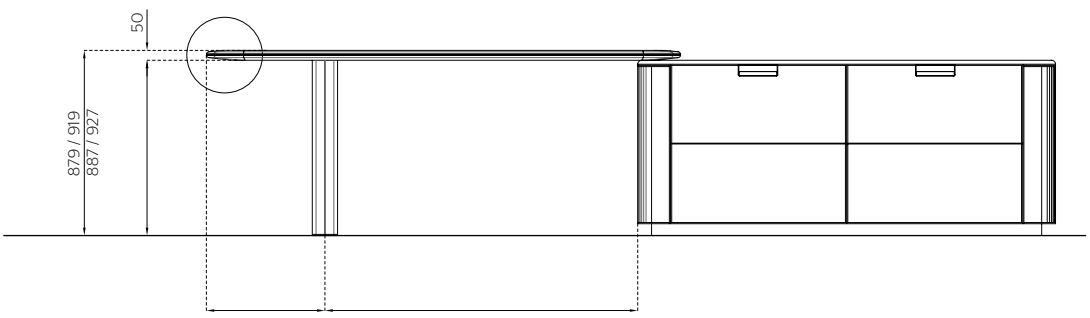




Finishes:
Wood
Trim profile:
Pewter
Iris
Bronze


Snack bar

Below are given the possible positions for Snack Tops relative to the kitchen worktop.

RECTANGULAR SNACK TOP WITH SUPPORT

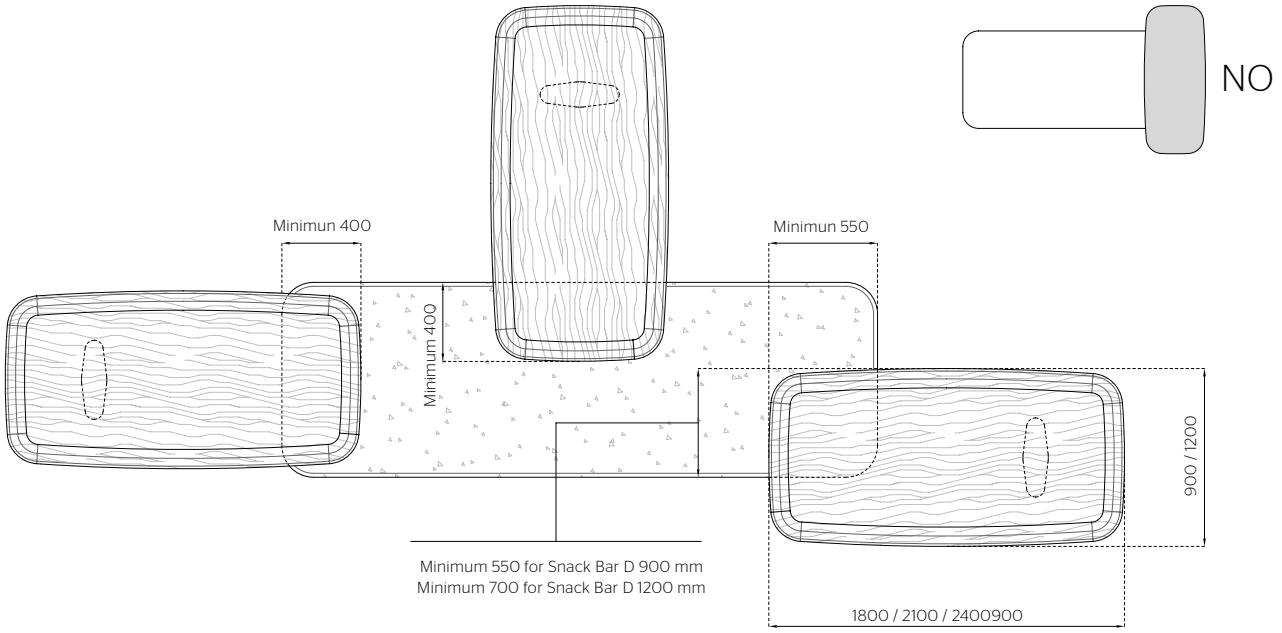


ROUND SNACK BAR WITH SUPPORT

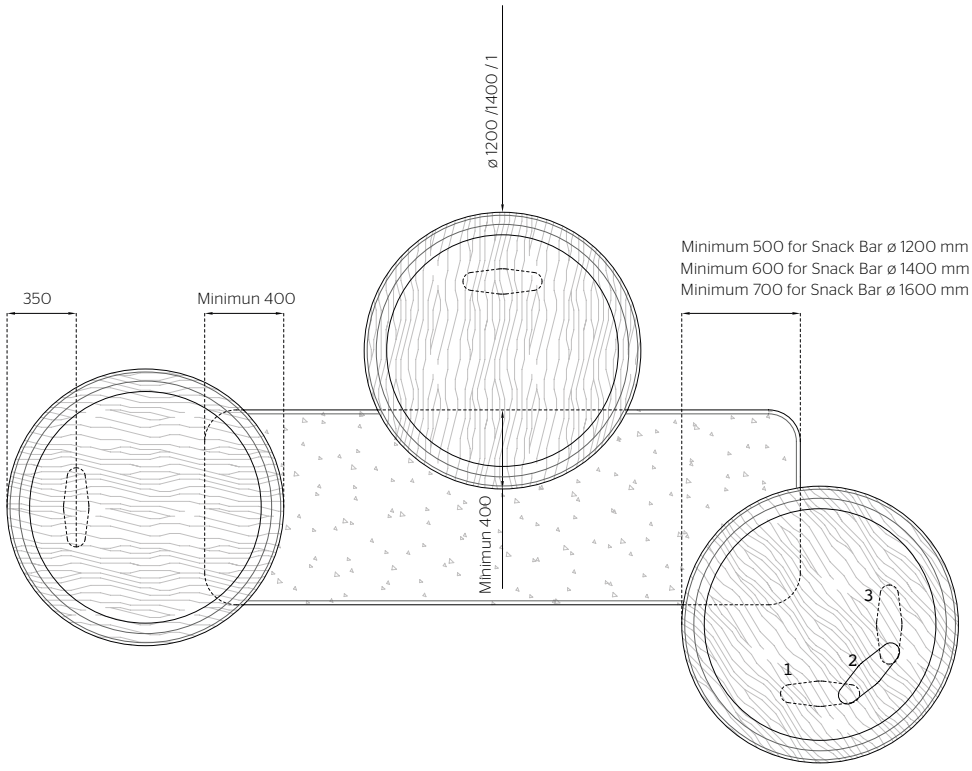


Piano snack

Indicate wood finish and trim profile finish when ordering (Iris, Pewter, or Bronze)

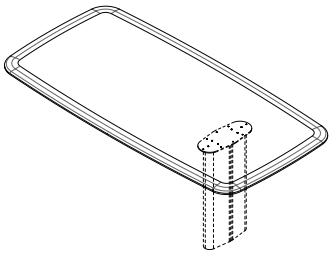


In the code, replace XX with:
18 for snack bar W 1800 mm
21 for snack bar W 2100 mm
24 for snack bar W 2400 mm-

CODE	W	D	TH	DESCRIPTION	W 1800	W 2100	W 2400
PS.XX090.049		900	50	Wood	4804	5372	5948
PS.XX120.049		1200	50	Wood	6158	6956	7750
PS.XX090.049		900	50	Premium Wood	5564	6294	7001
PS.XX120.049		1200	50	Premium Wood	7212	8185	9154



In the code, replace XX with:
1212 for snack bar Ø 1200 mm
1414 for snack bar Ø 1400 mm
1616 for snack bar Ø 1600 mm


CODE	TH	DESCRIPTION	Ø 1200	Ø 1400	Ø 1600
PS.XXXX0.051	50	Wood	4541	5735	7084
PS.XXXX0.051	50	Premium Wood	5244	6691	8333



In the code, replace XX with:
88 for support H 879 mm
89 for support H 887 mm
92 for support H 919 mm
93 for support H 927 mm
10 for support H 1000 mm

CODE	W	D	H	DESCRIPTION	WOOD	PREMIUM WOOD
GA.XX40.015	400	128	879/919	For worktop TH 12 mm	1831	2046
GA.XX40.015	400	128	887/927	For worktop TH 20 mm	1831	2046
GA.XX40.015	400	128	1000	Support for non-standard heights / reduction included in the price	2106	2353

Hood/Shelf

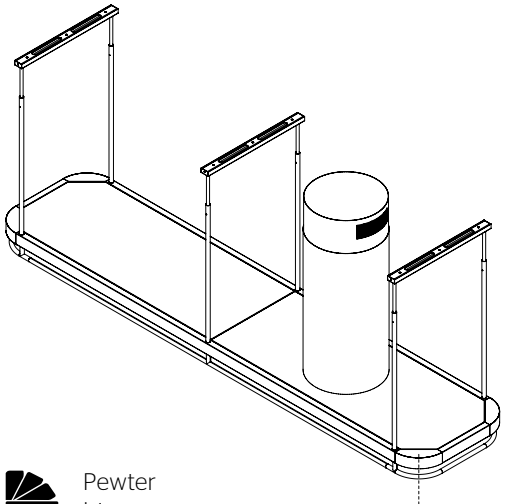


Pewter
Iris
Bronze





The measurements given here cannot be customised.
Extraction 800 m3/hr.
Certified only for EU market.
Supplied with touch control pad and remote.
Dimmable LED lighting: light intensity and temperature may vary from 2700°K standard, to 4000°K, adjustable via touch or remote control.
The hood has a presence sensor that intensifies brightness and changes temperature.
2x12W for W 2700 mm
2x9W for W 2100 mm
2X4.5W for W1200 mm3 extraction power levels
Noise level: 62 db (maximum power)
Motor power: 240 W
Flue hole Ø 150 mm
Voltage 220/240 V
Minimum distance from induction hob: 550 mm
Minimum distance from gas hob: 650 mm


FRONTE VIEW

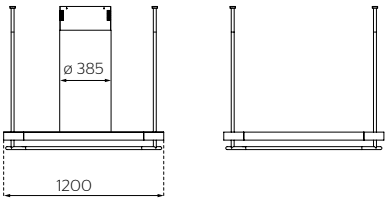

SIDE VIEW



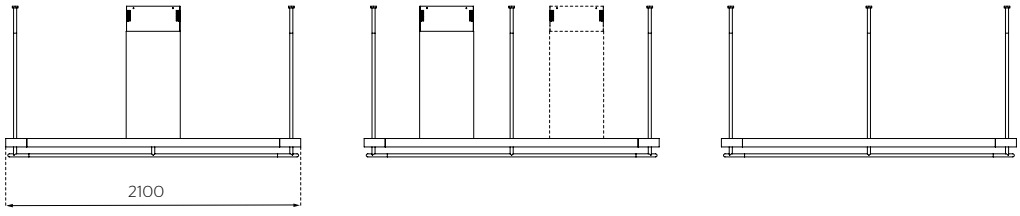

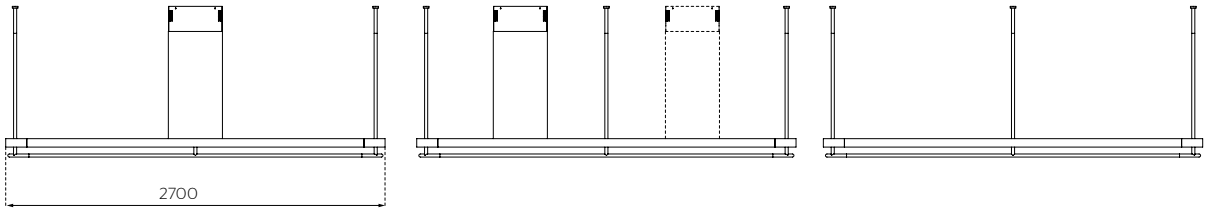

Compositions



FINISHES

ISLAND
Iris matt lacquered door
Breccia capraia marble top
Iris handles skirting and frame

SNACK
Coffee oak


COLUMNS
Bronzer matt lacquered doors
Pewter handles skirting and frame

BOISERIE
Coffee oak

TOP
Breccia capraia marble

SPLASHBACK
Breccia capraia marble

PLAN VIEW

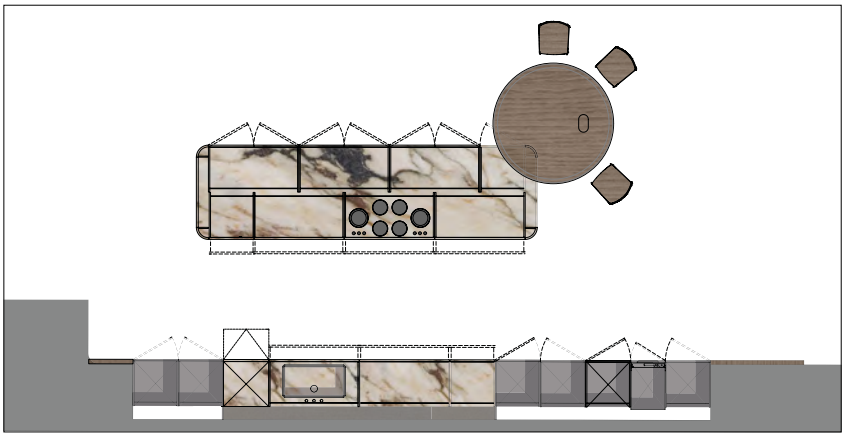

FRONT VIEW



Compositions



FINISHES

ISLAND
Pewter matt lacquered doors
Rain forest green marble top
Pewter handles skirting and frame
Hinoki base


COLUMNS
Pewter matt lacquered doors
pewter handles skirting, frame
and 6 mm panels

BOISERIE
Hinoki


TOP
Rain forest green marble

SPLASHBACK
Rain forest green marble

PLAN VIEW

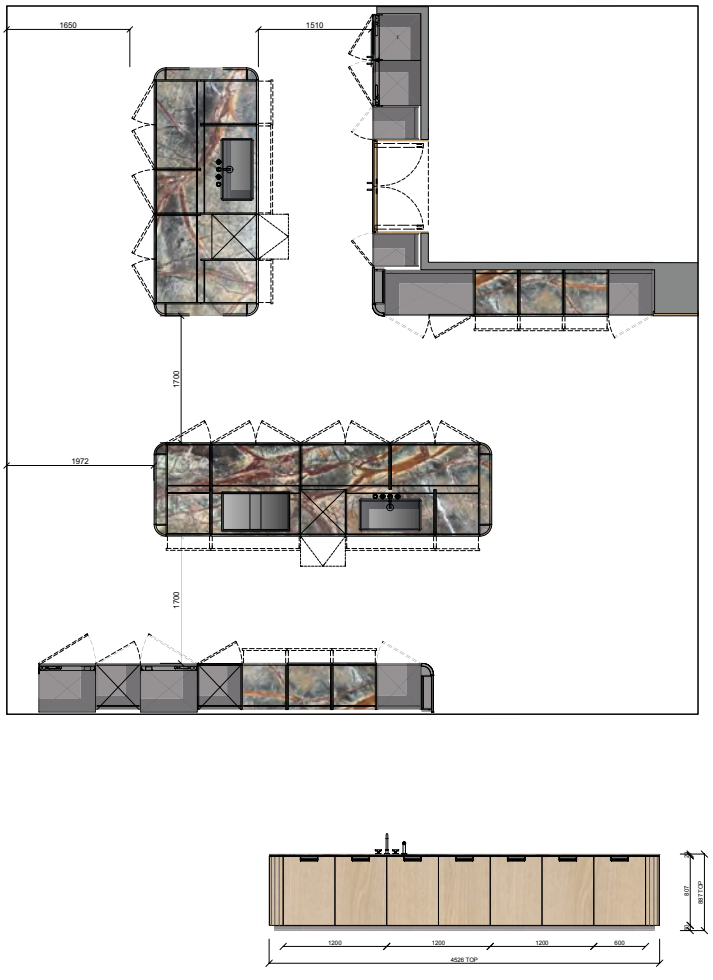

FRONT VIEW

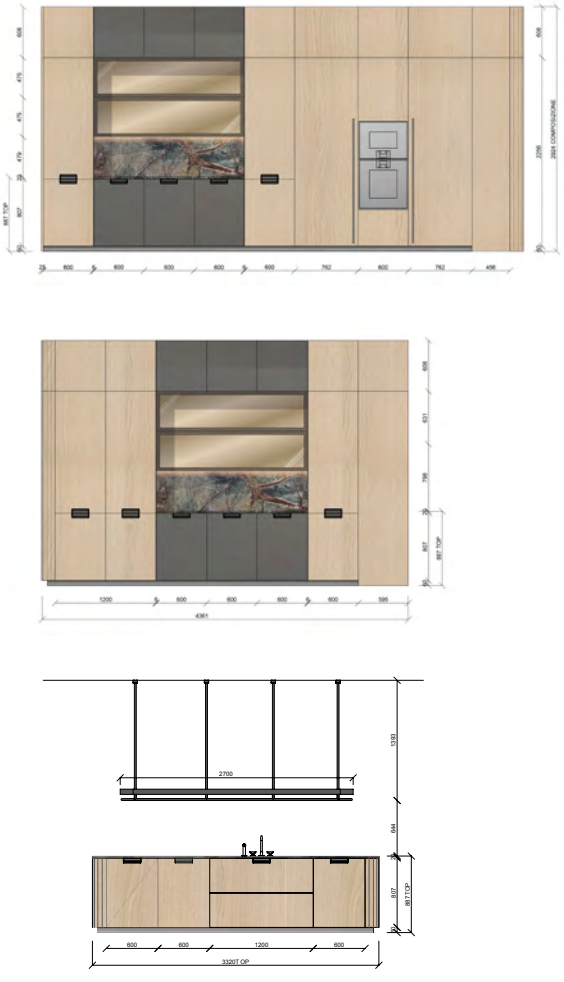

Door finishes

ES

WOODS | ESSENZE

- SUNRISE OAK / ROVERE SUNRISE
- WALNUT / NOCE
- AMBER OAK
- EUCALYPTUS / EUCALIPTO
- THERMO OAK / ROVERE TERMO
- LIGHT ELM / OLMO CHIARO
- DARK ELM / OLMO SCURO
- GRAPHITE OAK / ROVERE GRAFITE
- BLACK OAK / ROVERE NERO
- HINOKI

LOS

SPECIAL METALLIZED LACQUERED | LACCATI SPECIALI METALLIZZATI

- GOLD / ORO
- IRIS
- PEWTER / PELTRO
- BRONZE / BRONZO

LO, LL, LOR, VVA, VAA

LACQUERED, 3D LACQUERED, GLASS | LACCATI, LACCATI 3D, VETRI

- WHITE / BIANCO
- CHALK WHITE / BIANCO CALCE
- ALMOND WHITE
- PEARL / PERLA
- SILICA / SILICE
- SAND / SABBIA
- DOVE GREY / TORTORA
- PLATINUM / PLATINO
- LONDON SKY
- DUNE / DUNA
- IRIS / IRIS
- CAPPUCCINO
- CLAY / ARGILLA
- DOLOMITE
- COPPER / RAME
- BURGUNDY / BORGOGNA
- MOKA
- MUSTARD / SENAPE
- OZ YELLOW
- SPICE
- LIGHT GREY / GRIGIO CHIARO
- STARDUST
- MOONLIGHT
- LEAD / PIOMBO
- LIGHT BLUE GREY / CARTA DA ZUCCHERO
- DARK BLUE GRAY
- ANTHRACITE / ANTRACITE
- PEWTER
- PINE GREEN
- FOREST GREEN
- TALOS
- OSYRA GREY
- BLACK / NERO