

Superior
FIREPLACES®
Our name is our promise.



The DRL6000 Series linear direct vent gas fireplace is at home in both contemporary and transitional spaces. The expansive ceramic glass opening provides an exceptional view of the fire while the floor lighting allows you to enhance the mood. The DRL6000 is a fully featured fireplace that comes complete with a heat circulating blower and multi-function remote for the ultimate in comfort and control.



FEATURED DRL6072 shown with driftwood log set and platinum crushed glass media

- 🔥 Available in 48", 60", 72", and 84" linear configured models

- 🔥 Indoor see-through conversion kit available to allow viewing from two living spaces

- 🔥 Indoor/Outdoor see-through conversion kit available to enjoy the fire both inside and out (48" model only)

- 🔥 HeatFlo kit option allows heat to be directed above heat sensitive wall hangings

- 🔥 Electronic ignition with battery backup provides continued operation in the event of a power outage

- 🔥 Six flame settings with up to a 30% turn down for precise heat control

- 🔥 Outstanding heating efficiency for increased comfort and lower operating costs

- 🔥 Clean-face design with integrated tile stops for easy finishing

- 🔥 Ceramic glass for optimum heat transfer and a protective screen*

- 🔥 Factory installed blower with six speed settings to fine tune your heating needs

- 🔥 Black porcelain liner interior for a reflective view of the fire

- 🔥 Platinum crushed glass media included with several optional colors available

- 🔥 Mood enhancing floor lighting enhances the fireplace interior with or without a fire

- 🔥 Multi-function remote included (IPI/CPI, thermostat, flame height, blower, lighting)

- 🔥 Optional Power-Vent system available for down-and-out installations

- 🔥 20 year limited warranty

*All applicable models comply with ANSI Z21.88 barrier requirements.

**Blower use is not compatible with a see-through application.



DRL6060 shown with see-through kit and platinum crushed glass

INTERIOR

Liner



Black Porcelain Interior (Standard)




Reflective Black Glass Liner

Media



Platinum Crushed Glass (Standard)



Reflective Blue Crushed Glass



Reflective Black Crushed Glass



Driftwood Rock Kit



High-Definition Driftwood Log Set



River Rock Assorted Set

SEE-THROUGH KIT



Indoor/Indoor See-through Kit (all models)
Indoor/Outdoor See-through Kit (48" model only)

TRIM



Black Perimeter Trim Kit

REMOTE




On/Off Thermostat Remote (Standard)

- Manual On/Off and Thermostatic Modes
- 6 Flame Height Settings
- 6 Interior Light Settings
- 6 Blower Speed Settings

HEATFLO KIT


Protect heat sensitive televisions, artwork and other decorative wall materials. No blower required, the HeatFlo kit works through natural convection to redirect heat from the fireplace upward through hidden ductwork and out through a sleek horizontal vent. Walls stay cooler and heat flows more evenly through the room for a comfortable fireplace experience.

- TV & Artwork can be placed above the fireplace
- Helps protect heat sensitive wall facing materials
- Improves convective heat circulation in the room
- No electricity or blower required for operation

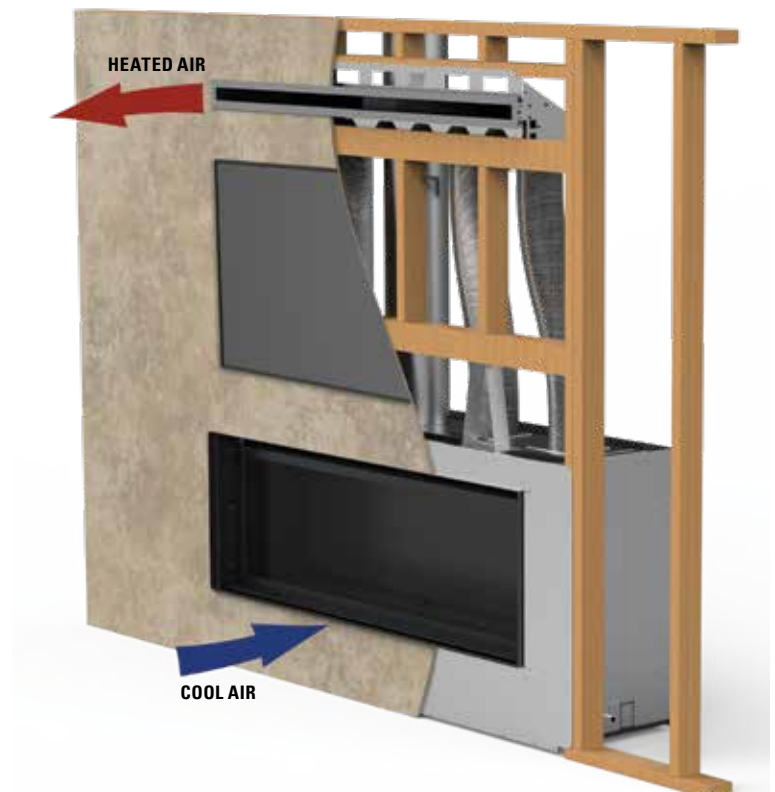


APPLIANCE SPECIFICATIONS

48" MODEL

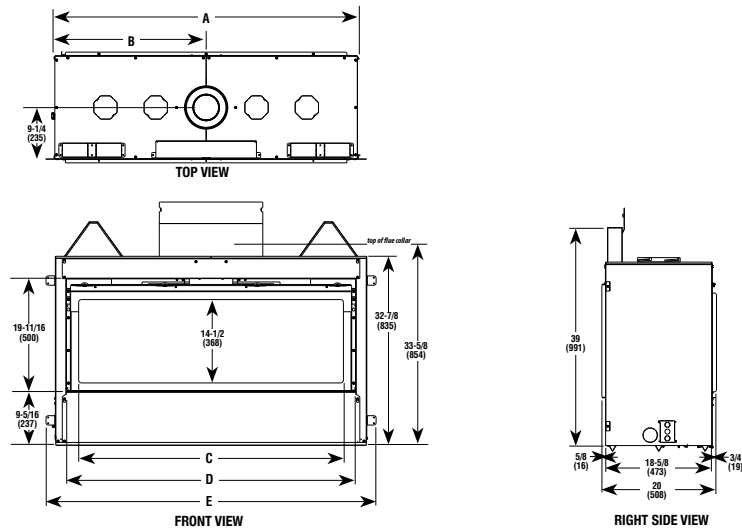

60", 72", & 84" MODELS

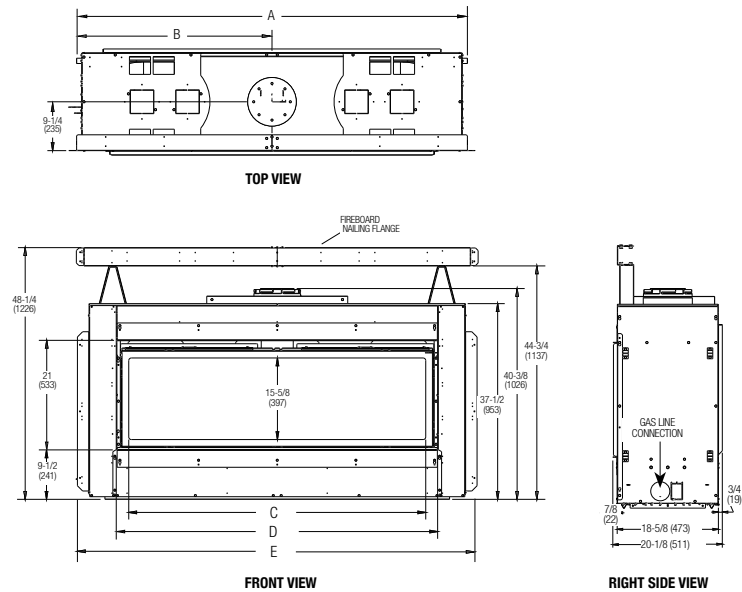

DRL 6000 SERIES DIMENSIONS

Models	A	B	C	D	E
48"	54-1/4"	27-1/8"	46"	50-3/8"	57-7/16"
60"	74"	37"	56-5/8"	61-1/2"	76-5/8"
72"	86"	43"	68-5/8"	73-1/2"	88-5/8"
84"	98"	49"	80-5/8"	85-1/2"	100-5/8"

• REFER TO INSTALLATION MANUAL FOR ALL REQUIRED CLEARANCES TO COMBUSTIBLES.


On the Cover: *DRL6084 fireplace with black porcelain interior and platinum crushed glass media*



© 2023 Innovative Hearth Products
785729M 03/23

Visit us online
SuperiorFireplaces.us.com

FRAMING SPECIFICATIONS

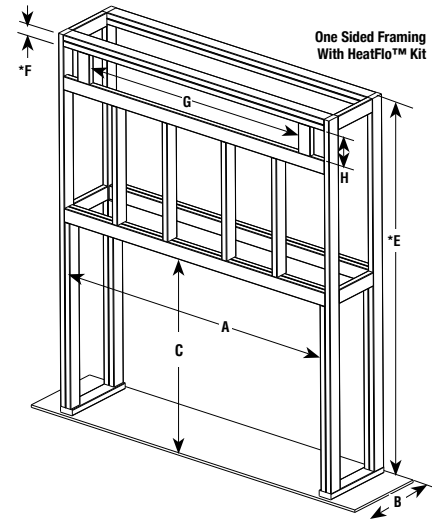

DRL 6000 SERIES FRAMING DIMENSIONS

Models	A	B	C	E	F	G	H
48" One Sided Framing HeatFlo Kit	55-5/8"	19-1/2"	39-1/8"	84"	1-1/2"	53-1/2"	5-1/8"
60" One Sided Framing HeatFlo Kit	74-1/4"	19-1/2"	48-1/2"	84"	3"	62"	7-1/2"
72" One Sided Framing HeatFlo Kit	86-1/4"	19-1/2"	48-1/2"	84"	3"	78"	7-1/2"
84" One Sided Framing HeatFlo Kit	98-1/4"	19-1/2"	48-1/2"	84"	3"	90"	7-1/2"

E. Minimum height from appliance base to ceiling

F. Minimum Opening Distance from Ceiling to Allow for Min Distance from HeatFlo Register to Ceiling of 6"

• REFER TO MANUAL FOR COMPLETE SEE-THROUGH APPLICATION FRAMING DIMENSIONS AND MORE.

FIREPLACE BTU OPERATING RANGE

MODEL	FUEL	BTU/HR	AFUE	P4
DRL 6048	NG	35,000-23,500	63.0	62.5
DRL 6048	LP	31,000-25,500	63.0	62.4
DRL 6060-B	NG	40,000-28,000	52.6	55.1
DRL 6060-B	LP	40,000-30,000	52.6	54.0
DRL 6072	NG	45,000-31,500	55.0	57.0
DRL 6072	LP	43,000-32,250	55.0	57.8
DRL 6084	NG	50,000-35,000	51.1	55.4
DRL 6084	LP	47,000-35,250	56.7	63.1

IMPORTANT NOTES:

As with any fireplace, this appliance is extremely hot during operation. Read and understand all operating instructions before using this appliance. For further information, consult your dealer.

Local conditions, such as elevation and choice of fuel will affect overall appearance of the fire and heating performance. Performance can also vary with home design and insulation, ceiling height, accessories chosen and appliance location.

Diagrams, illustrations and photographs are not to scale — consult installation instructions. Product designs, materials, dimensions, specifications, colors and prices are subject to change or discontinuance without notice.



Report #F18-195 (60"/72"/84" models)
Report #F22-797 (48" models)