

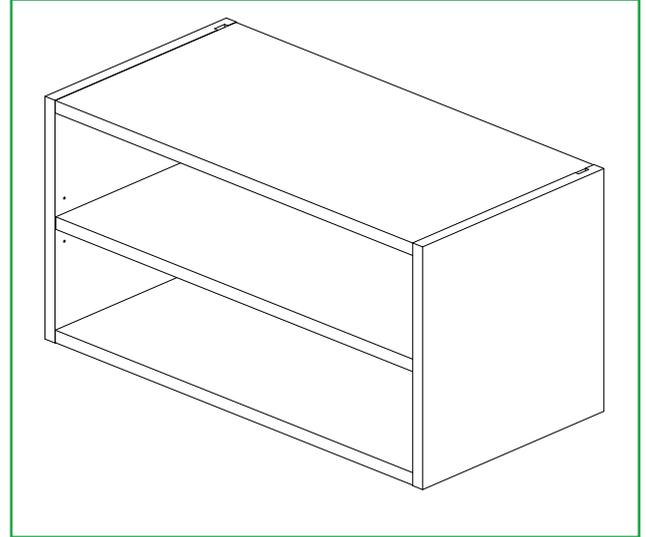


# INFINITY PLUS Base Unit

## Feature Living and Lounge Base Unit (330/450/468 Deep) - Fitting Guide

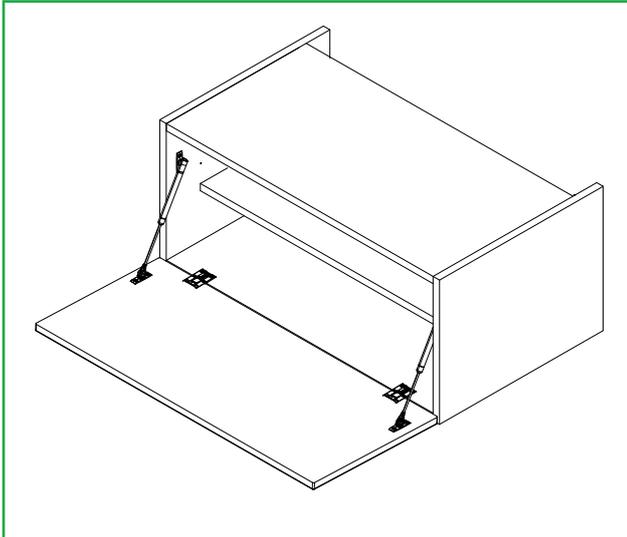

### Units Parts



2 x Camar Antitip  
Wall Plate  
(RH & LH)



4x 15mm  
screws



12x 30mm  
screws



2x L-Brackets



5x  
Door Buffer




18x  
Cover Caps



8x Shelf  
Pegs


### Tools Required



Drill




Screwdriver



Clamp



Spirit Level



Tape Measure


Remember to take care when unpacking. Please keep your workspace clean, clear and tidy when working. This will help keep all items safe from any damages. Any un-needed cardboard or plastic should be flattened down and placed in the bin.

A minimum of two people will be needed to lift the unit.

### Unpacking the parts and fittings


Remove all content from the packaging and ensure to familiarise yourself with all unit parts and fittings.

All parts and fittings should be kept on a clean and level surface and the shelf placed in the door safe along its longest length.

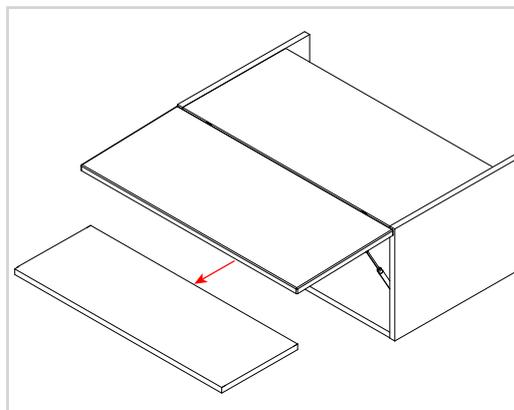


### Removing the frontal (if required)

Before installing the unit, remove the frontal by removing the cover cap and releasing the screw shown in the diagram and unhooking the door

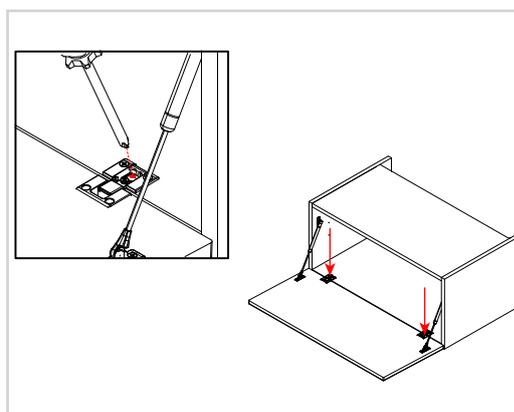


Remove the frontal by un-clipping the lift hinge mechanisms from each of the bracket.

Place the frontal in the door safe along its longest length.

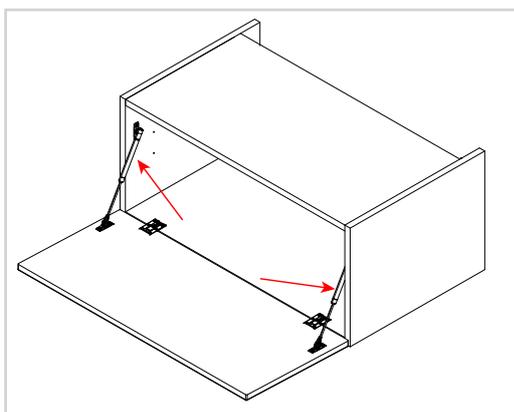

### Installing the L-bracket

Secure the L-brackets internally in both bottom corners of the unit at the rear using **2x15mm** screws per bracket.

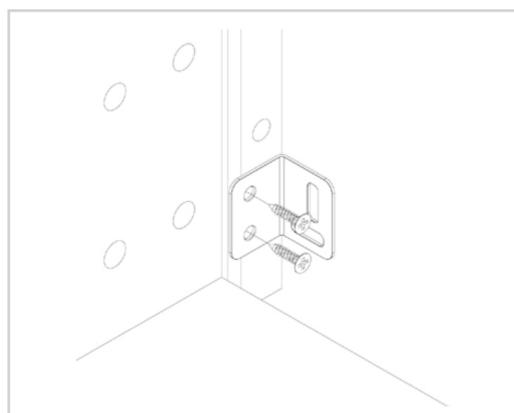


## Installing the wall hanging bracket

Place the unit on its side for better access to inserting and securing the hanging bracket.

Please note that the brackets are not identical, ensure that the correct bracket is placed on its appropriate side of the unit.

Insert the hanging bracket into the pre-drilled holes and secure using the screws provided with the bracket.

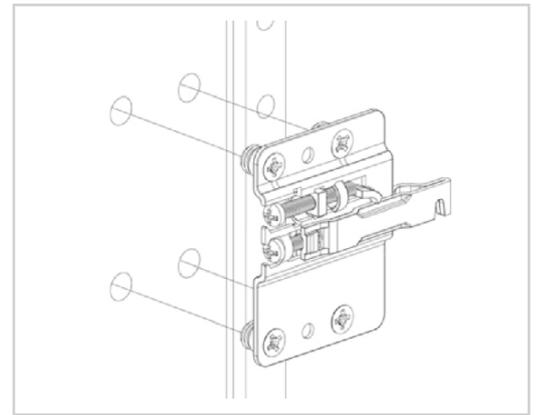


## Finding the fixing point for the wall brackets

The fixing points for the wall hanging brackets will be **140mm** from the top of the units to the bottom of the hanging bracket.

Draw a line on the wall **140mm** below the top line of the unit (already marked), this will be where the bracket will sit.

Draw a vertical line **20mm** inside either side of the pre marked wall unit positions.

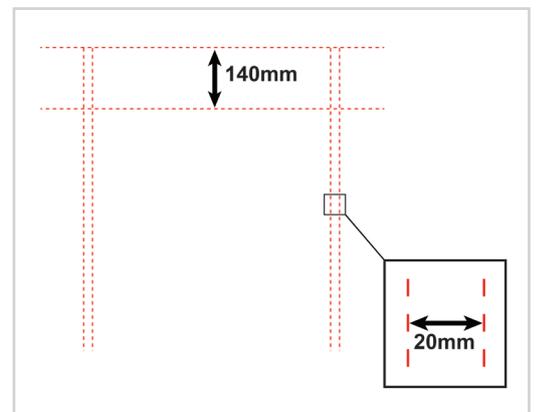

**No screws or wall plugs are provided for attaching the unit to the wall.  
This is due to variations in wall construction.**


**Before drilling into the wall you MUST check for any hidden services or pipework within the walls.**

## Attaching the wall hanging bracket to the wall

Position the **2x** hanging brackets as shown and mark the holes onto the wall.

Remove the hanging bracket, then drill holes into the wall where the markings are appropriate for the screws required.


Attach the hanging bracket onto the wall by screwing through the holes on the hanging bracket into the holes on the wall.

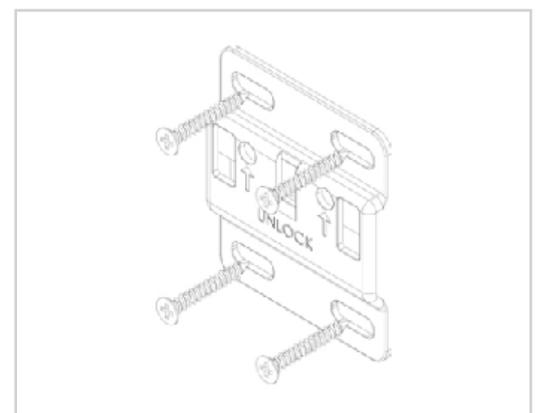

## Lifting the unit into place

Lift the unit against the wall slightly higher than its finished height. Insert the bracket into the wall hanging brackets to hook the unit and lower the unit down, as illustrated.

Before releasing the unit, gently tug it to ensure it is securely supported by the hanging brackets.

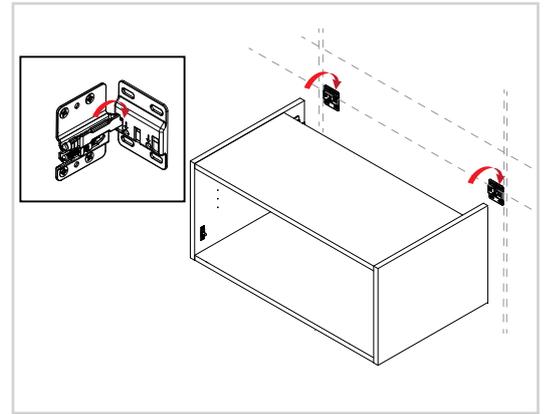


## Adjusting the wall brackets

Using the points below, adjust the unit to suit.

**Point 1** – Turn this screw to adjust the height of the unit.


**Point 2** – Turn the screw to adjust the depth of the unit.

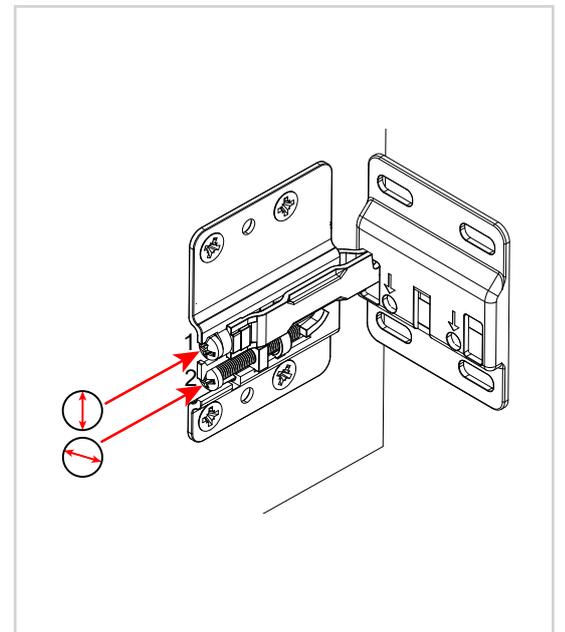

No screws or wall plugs are provided for attaching the unit to the wall.  
This is due to variations in wall construction.

## Securing the unit to the wall

Secure the unit to the wall by screwing through the L-bracket into the wall.

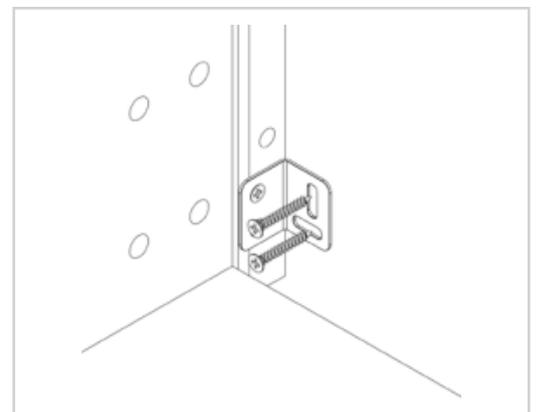


## Securing to adjacent units

Clamp together the two units, checking the front edges are level and flush.

Using the screws provided, **1x30mm** screw should be fixed into each corner of the carcass side.



The screws can be concealed by placing them behind the shelf or behind the hinge plates, The cover caps can be used to hide any visible screw heads

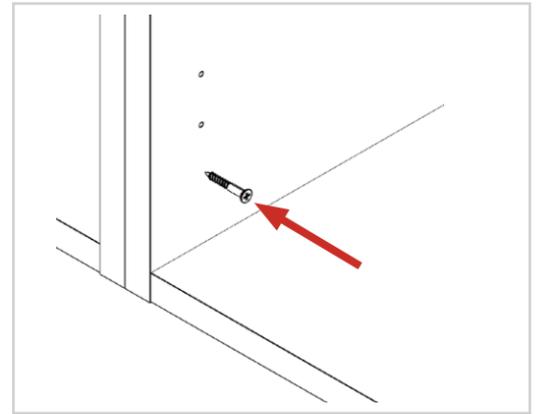

## Attaching the frontal

The frontal should be re-attached to the unit by hooking the hinges together and tightening the screw shown in the diagram.


Clip the lift hinge mechanisms into each of the bracket.

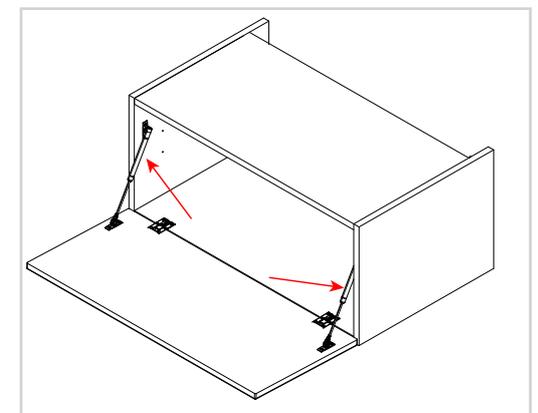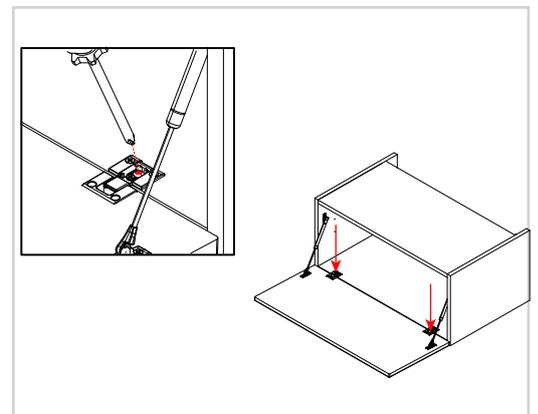

## Inserting the shelf into position


Position the shelf pegs into the pre-drilled holes, the shelf can be positioned at **5** different heights.

The shelf will touch the back panel when installed, if there is a gap between the back panel and shelf then the shelf has been installed back to front and the shelf needs to be rotated.

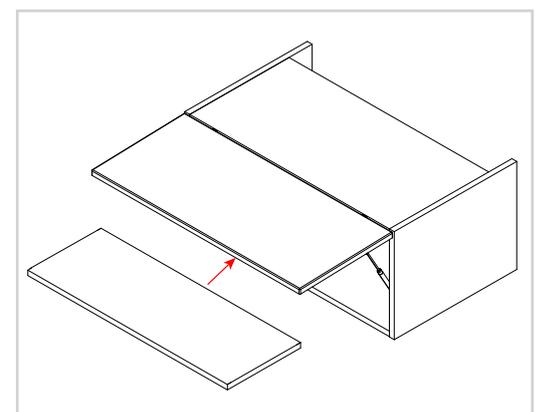

## Adding the door buffers

Position the door buffer at the top and bottom corners of the carcass, as illustrated in the image.

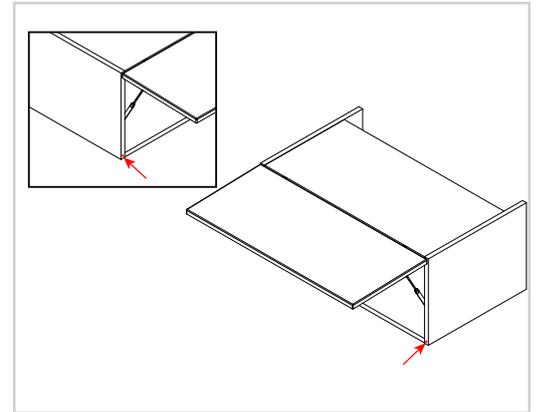

## Adjusting the hinges and installing the cover caps


To adjust the hinges, use a screwdriver as required at points 1 and 2.

**Point 1** – Will secure the frontal in place.

**Point 2** – Will adjust the height of the frontal.

To move the frontal left or right, and in or out, loosen the screw at point 1 and adjust the frontal, tighten point 1 to secure the frontal in place.

Fit the hinge cover caps to the hinges by pressing down until the cap clicks.

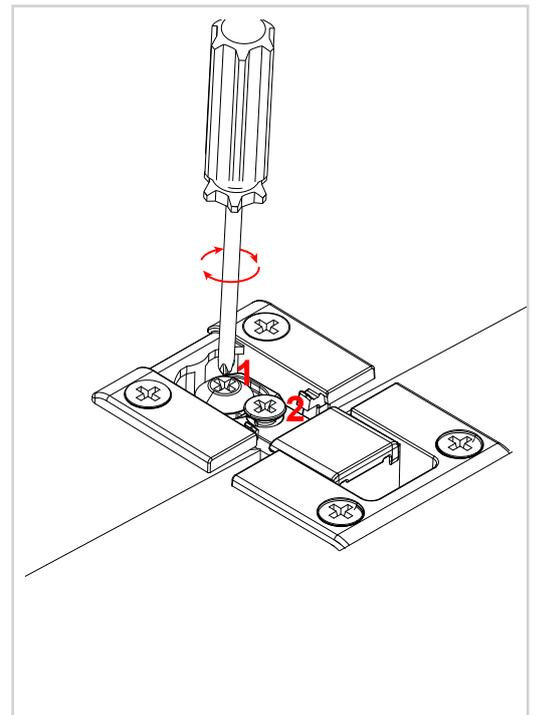

## Cleaning the unit

Finally, the unit should be thoroughly cleaned to remove any debris that may have accumulated during the installation.

