


INFINITY PLUS

Milano Mitred Decor End

Double Mitred Decor End - Fitting Guide

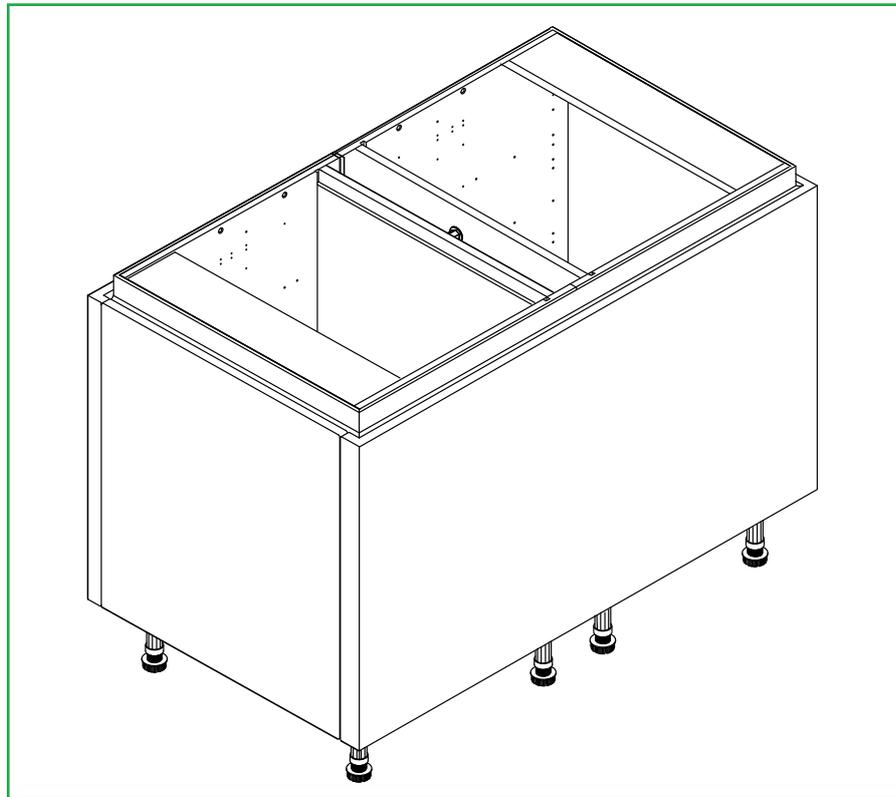


Parts Required



4X 25mm
screws
(Provide with the
unit)




4x Cover
Caps
(Provided with the
unit)




Decor panel


Tools Required




Drill



Mitre Saw



Clamp



Tape Measure


Remember to take care when unpacking. Please keep your workspace clean, clear and tidy when working. This will help keep all items safe from any damages. Any un-needed cardboard or plastic should be flattened down and placed in the bin.

The following guide is applicable for both the single decor and drawer decor panels.

Removing the frontal

Before installing the unit, remove the frontal by pulling the release catch.


Place the frontal in the door safe along its longest length.

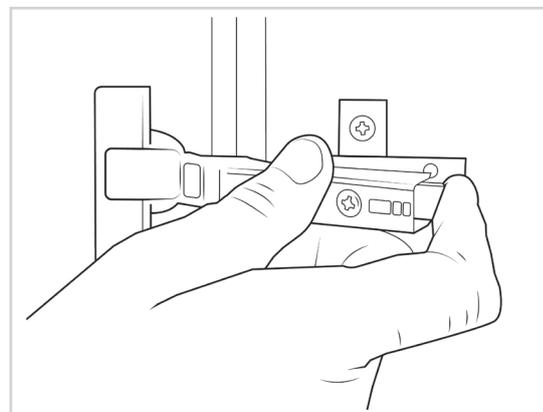

Please review the “Top And Mid Profile Fitting Guides” if the profile hasn’t already been installed on the units

Locating the frame


Locate and familiarise yourself with the packer frame, this frame will be the back of the decor panel and will sit at the top. The packer will sit below the top profile of the base unit once installed.

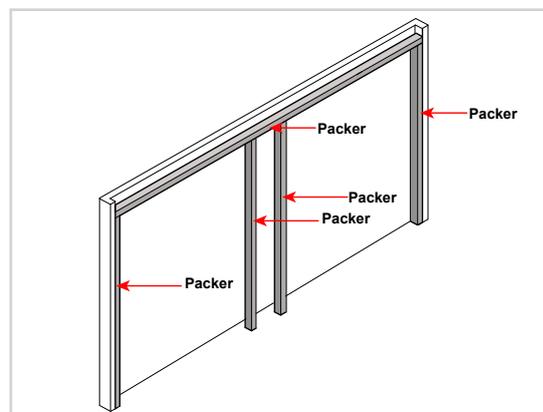

Positioning the decor panel

Position the decor panel against the unit so the packer sits beneath the top rail. Once positioned clamp together the decor to the units.

Level the decor panel and ensure the decor is level and flush to the adjacent frontals.

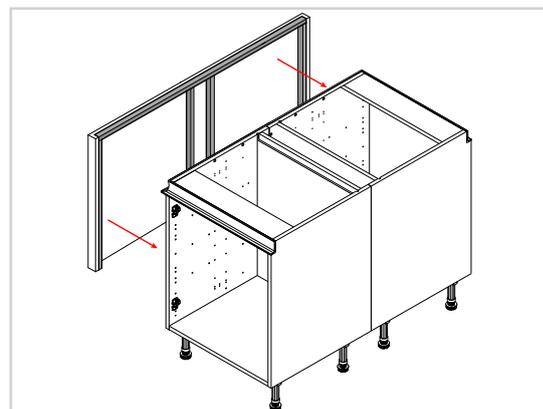


The screws required to fit the decor panel will arrive in the fitting pack for the adjacent units

Securing the decor panel


1x30mm screw should be fixed into **4** positions of both of the adjacent units. These screws should be fixed along the packer frame horizontally and vertically behind the hinges.

The cover caps can be used to hide any visible screw heads that remain.

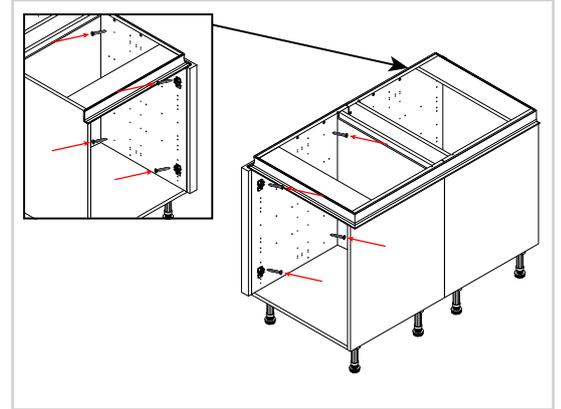

Attaching the frontals

The frontals should be re-attached to the unit by clipping the hinges onto the hinge plates. The bar of the hinge needs to be positioned into the hooks on the hinge plate. Then the rear of the hinge pushed to the hinge plate until it clicks.

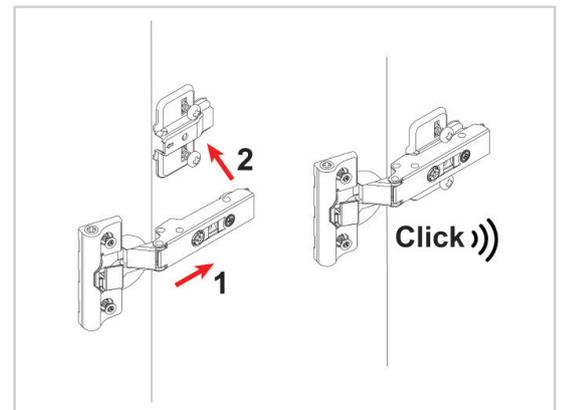

Cleaning the unit

Finally, the unit should be thoroughly cleaned to remove any debris that may have accumulated during the installation.

