


INFINITY PLUS

Milano Mitred Decor End

Single Mitred Decor End- Fitting Guide

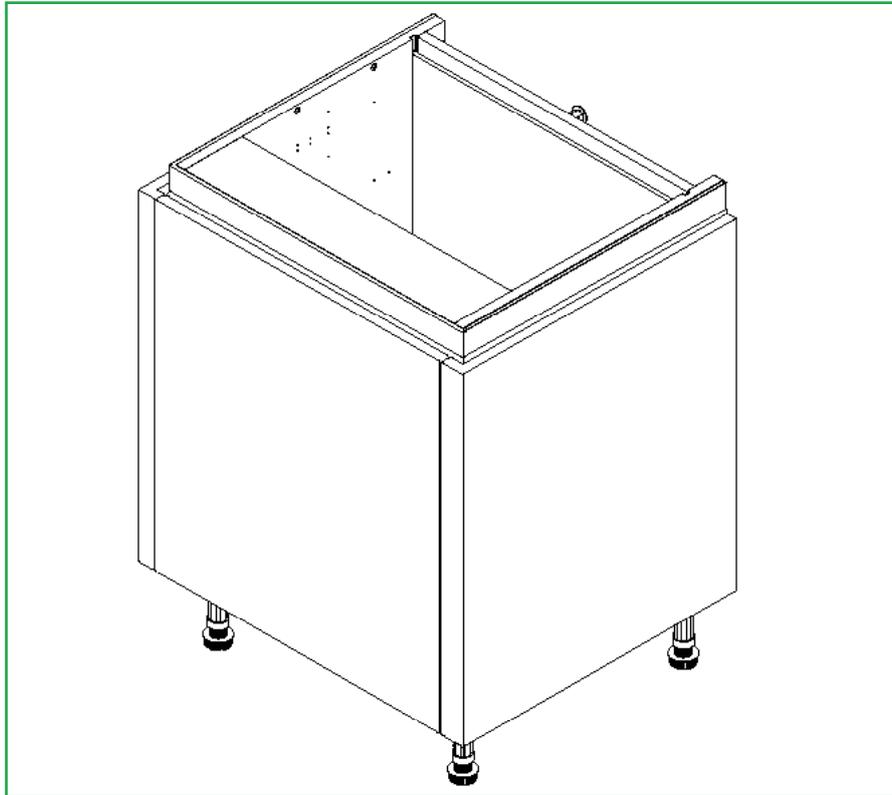


Parts Required



4x 25mm
Screws
(Provided with the
unit)



4x Cover
Caps
(Provided with the
unit)

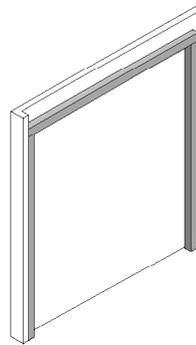

Decor panel

Tools Required



Drill



Mitre Saw



Clamp



Tape Measure


Remember to take care when unpacking. Please keep your workspace clean, clear and tidy when working. This will help keep all items safe from any damage. Any un-needed cardboard or plastic should be flattened down and placed in the bin.

The following guide is applicable for both the single decor and drawer decor panels.

Removing the frontal

Before installing the unit, remove the frontal by pulling the release catch.

Place the frontal in the door safe along its longest length.

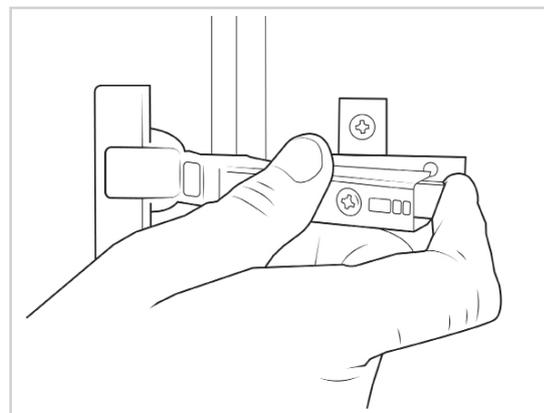


Please review the “Top And Mid Profile Fitting Guides” if the profile hasn’t already been installed on the units

Locating the frame

Locate and familiarise yourself with the packer frame, this frame will be the back of the decor panel and will sit at the top. The packer will sit below the top profile of the base unit once installed.

Tape the decor panel along the rear side with low-adhesive masking tape.


This will be used for marking where to cut the decor panel down.

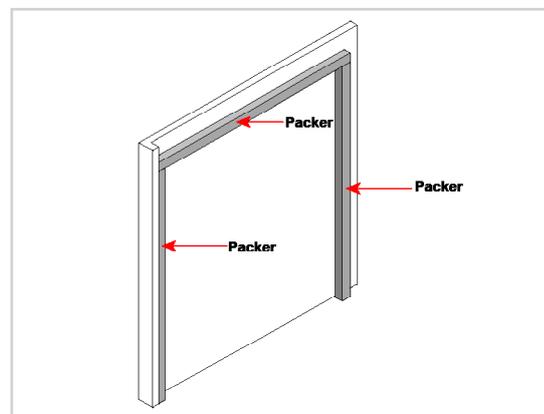

Placing the decor panel back into position

Place the decor panel back into position and secure it with a clamp.

Level the decor panel and ensure the decor is level and flush to the adjacent frontals.

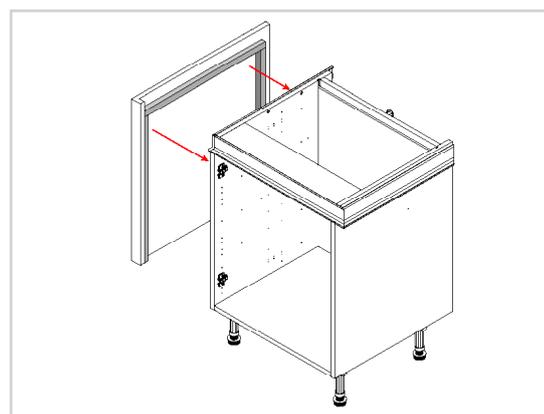


Securing the decor panel

1x30mm screw should be fixed into **4** positions of the adjacent units. These screws should be fixed along the packer frame horizontally and vertically behind the hinges.


The cover caps can be used to hide any visible screw heads that remain.

Use silicone to seal the joins between the panel, the wall, and the floor, this will create a seal between the two surfaces and secure the panel in place.

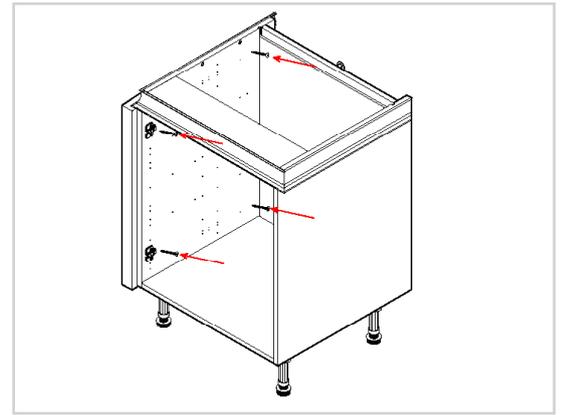

Attaching the frontal

The frontal should be re-attached to the unit by clipping the hinges onto the hinge plates. The bar of the hinge needs to be positioned into the hooks on the hinge plate. Then the rear of the hinge pushed to the hinge plate until it clicks.

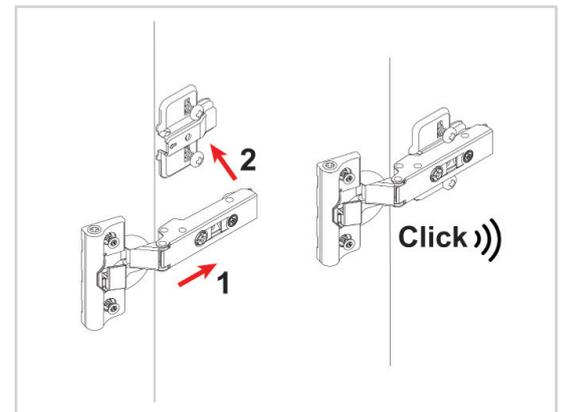

Cleaning the unit

Finally, the unit should be thoroughly cleaned to remove any debris that may have accumulated during the installation.

