



Belfast Sink - Fitting Guide

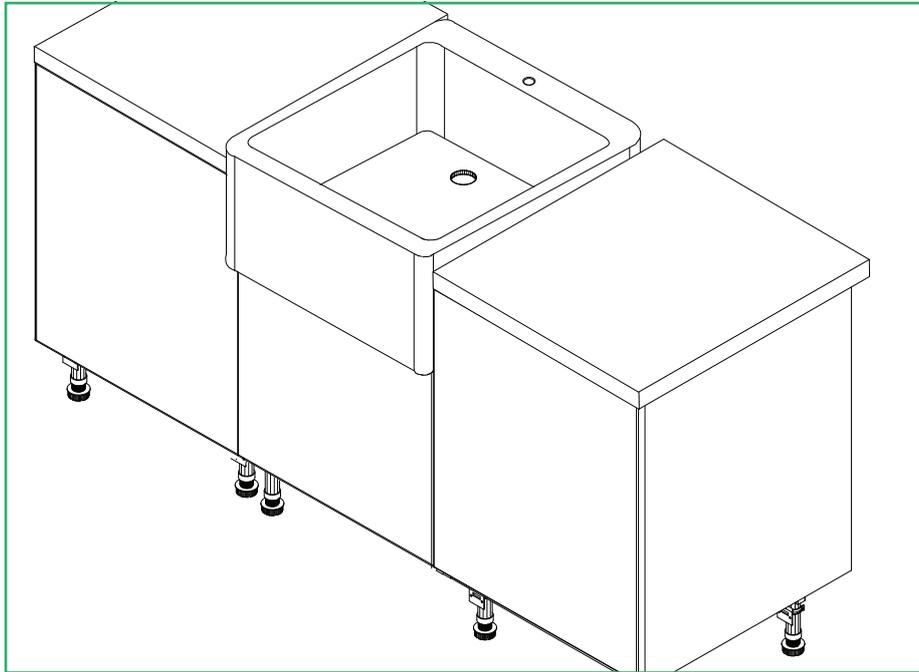


Page 2-4 Undermount Belfast Sink

Page 5-7 Overmount Belfast Sink

Undermount Belfast Sink

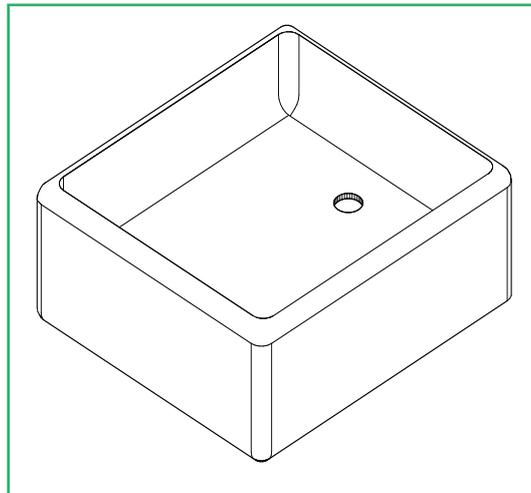

Parts Required




Sink

Tools Required



Jigsaw



Silicone Sealant


Remember to take care when unpacking. Please keep your workspace clean, clear and tidy when working. This will help keep all items safe from any damage. Any un-needed cardboard or plastic should be flattened down and placed in the bin.

Before installation, ensure appropriate pipework has been carried out by a qualified plumber if necessary, and all required services are accessible from within the planned unit .

Before installing the sink, ensure the space beneath the sink is open and free from obstruction.
Remove the frontal from the Belfast unit.

Fitting the attachments


Fit the any of the attachments to the sink according to manufacturer's guidelines.

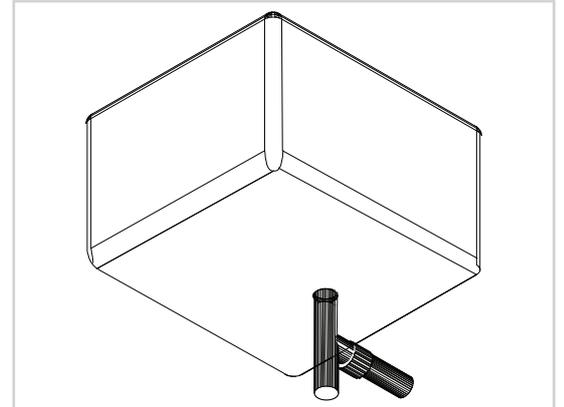

Positioning the sink

Carefully position the sink onto the supporting rails.


The front edge of the sink will sit proud of the frontals. To achieve this, position the sink with the back of the front corner radius sitting forward from the unit by the **25mm**.

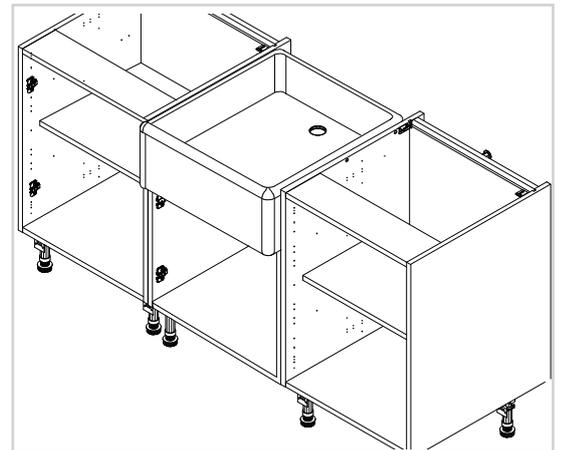

Cutting the base rail (if required)

If additional space is required for the plumbing, the base rail may need to be cut to create room for the feed and waste pipes.


Temporarily remove the sink from position. Mark onto the base rail the position of the waste pipes and/or water feed and, using a jig saw, notch out the required space.

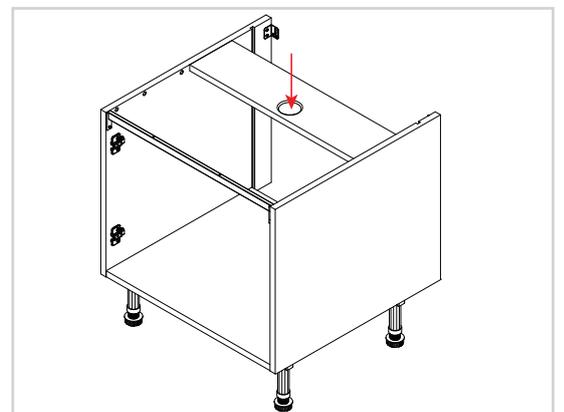

Install the tap into the sink or the worktop before sealing the sink into place.


Cleaning the unit and sink

Finally, the sink and unit should be thoroughly cleaned to remove any debris that may have accumulated during the installation.

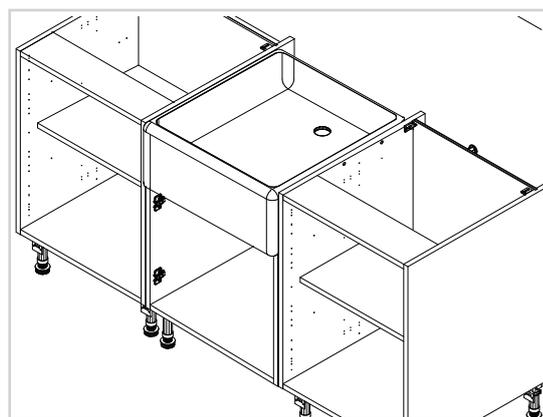


All waste and pipe work should be connected by a qualified plumber.

Overmount Belfast Sink

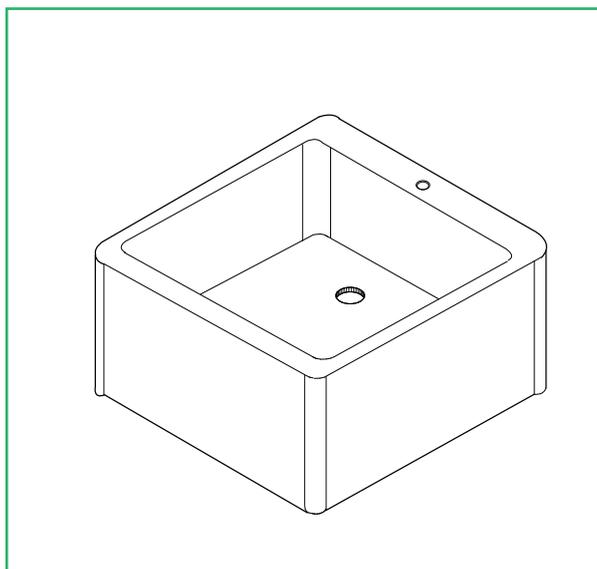

Parts Required



Sink

Tools Required



Silicone Sealant


Remember to take care when unpacking. Please keep your workspace clean, clear and tidy when working. This will help keep all items safe from any damage. Any un-needed cardboard or plastic should be flattened down and placed in the bin.

Before installation, ensure appropriate pipework has been carried out by a qualified plumber if necessary, and all required services are accessible from within the planned unit.

Before installing the sink, ensure the space beneath the sink is open and free from obstruction.
Remove the frontal from the Belfast unit.

Fitting the attachments


Fit any of the attachments to the sink according to manufacturer's guidelines.

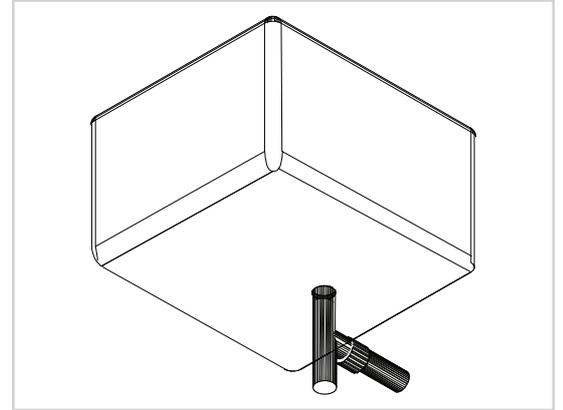

Positioning the sink

Carefully position the sink onto the supporting rails.

The front edge of the sink will sit proud of the frontals. To achieve this, position the sink with the back of the front corner radius sitting forward from the unit by the **25mm**.

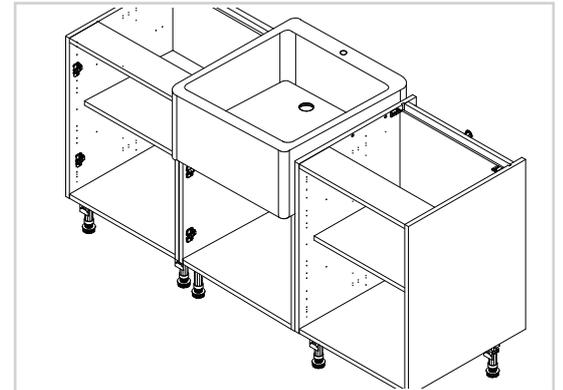


Install the tap into the sink or the worktop before sealing the sink into place.

Fitting the worktop


Fit the worktop.

Refer to the 'Worktop - fitting guide' for your worktop.

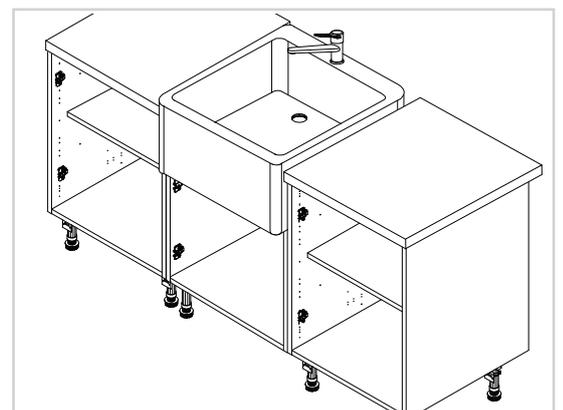

Cleaning the sink and unit

Finally, the sink and unit should be thoroughly cleaned to remove any debris that may have accumulated during the installation.

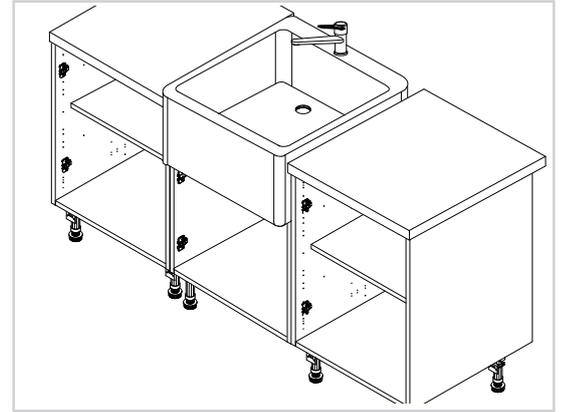

All waste and pipe work should be connected by a qualified plumber.