
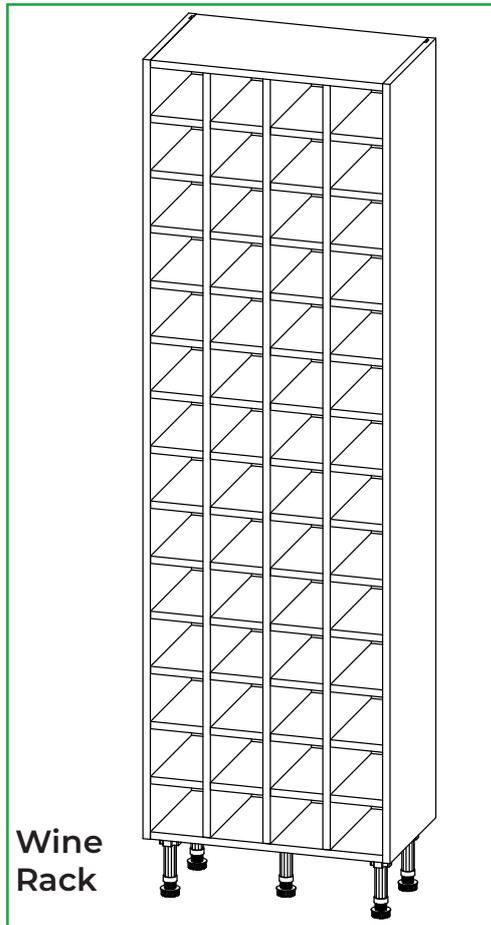


FEATURE UNIT

Tower Unit

550 - 600, Open Feature Tower Unit - Fitting Guide

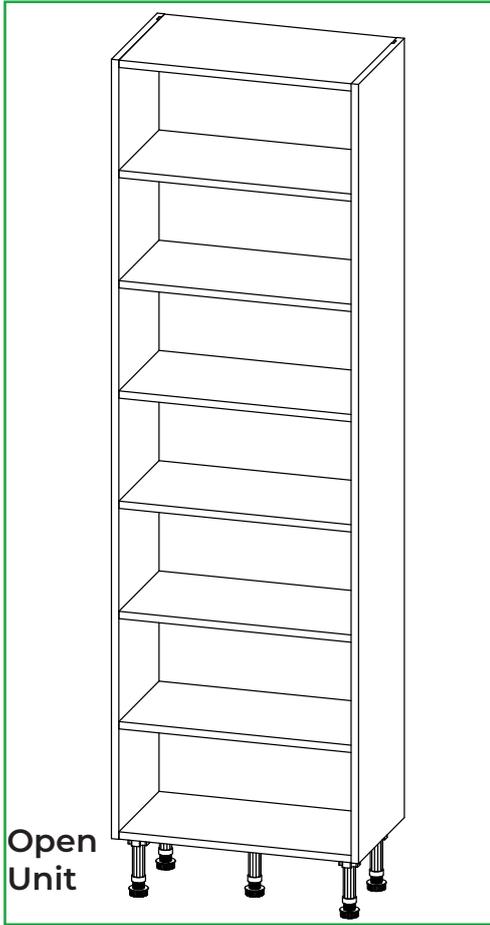

Unit Parts

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |  |
| 28x 15mm screws | 4x 30mm screws | 4x Legs | 4x Leg Brackets | 2x Plinth Clips | 2x L-Brackets | 8x Cover Stickers | 8x Shelf Pegs | 2x Shelf |

Tools Required

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| Drill | Screwdriver | Clamp | Spirit Level | Tape Measure |


Remember to take care when unpacking. Please keep your workspace clean, clear and tidy when working. This will help keep all items safe from any damages. Any un-needed cardboard or plastic should be flattened down and placed in the bin.

A minimum of two people will be needed to lift the unit.

Unpacking the parts and fittings

Remove all content from the packaging and ensure to familiarise yourself with all unit parts and fittings.



All parts and fittings should be kept on a clean and level surface and the frontal and shelf placed in the door safe along their longest length.

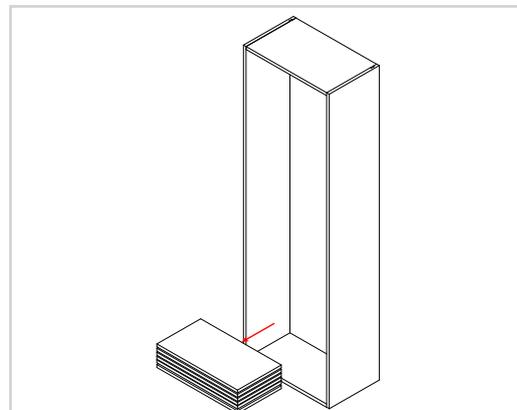

Not all shelving can be removed from the wine rack unit.


Positioning the leg brackets

Locate the leg brackets and position, as shown in the diagram. Ensure the leg brackets are rotated so the flange covers the outer edge, as this provides support for the edge of the unit.

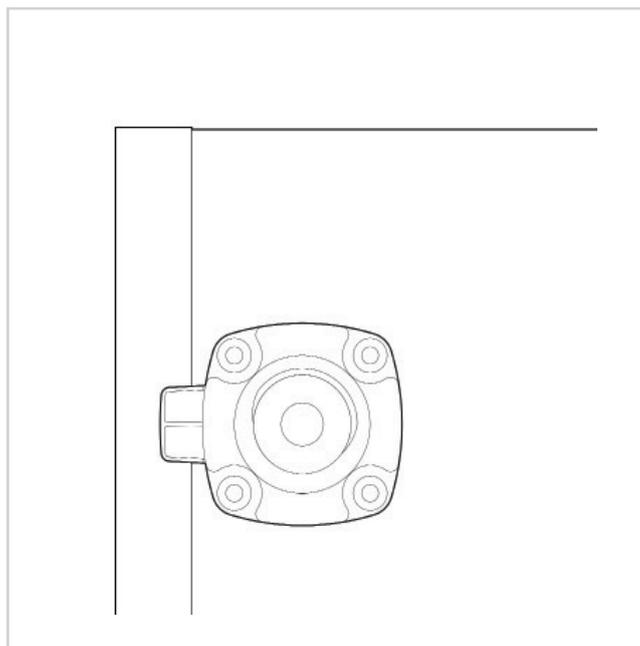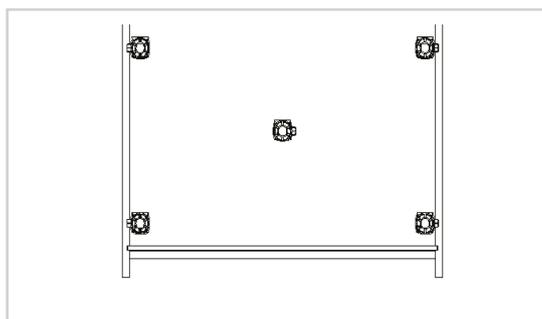

Fixing the leg bases


Secure each of the leg brackets into place with **4x15mm** screws per bracket.

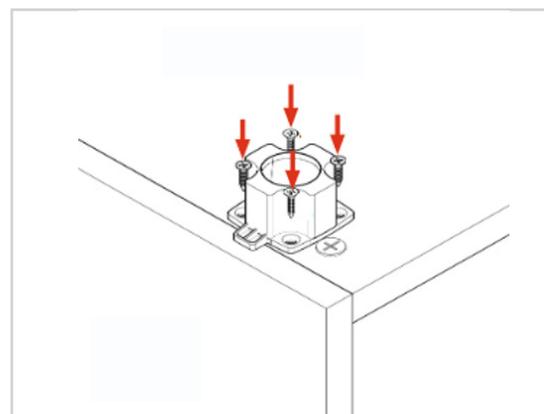

Inserting the legs

Push each leg firmly down into the leg bracket. Adjusting each leg to **155mm (165mm Linea/Milano)**.

Adjust the legs to the correct height by turning clockwise or anti-clockwise.

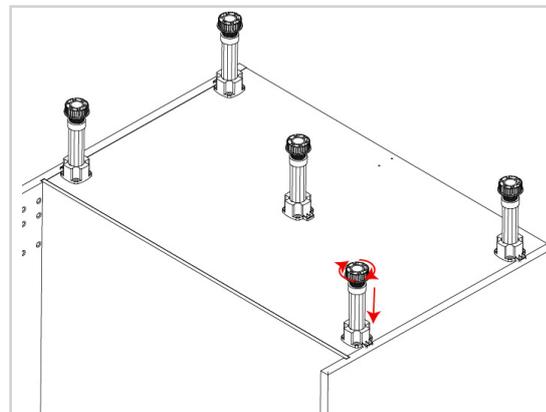


Lifting the unit into place

When lifting the unit into place do **not** tilt as this can damage the legs.

Place the unit against the wall and align it with the wall markings that will have been drawn during the room preparation stage.

Use a spirit level to ensure the unit is level from front to back, left to right, and diagonally. Adjust the legs if required.

The leg height can be adjusted by turning the foot of the leg clockwise or anti-clockwise.

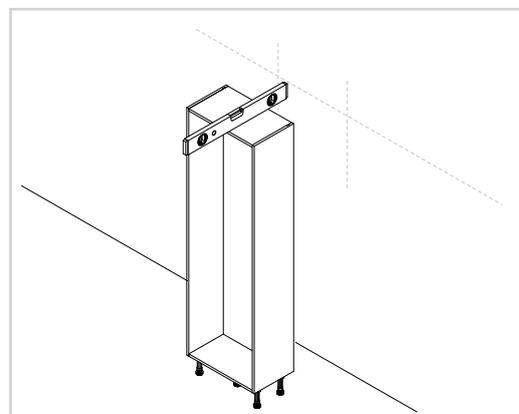


Please note that the open wine rack units have fixed shelf heights that cannot be adjusted.

Finding the shelf height (if required)

Position the shelf pegs into the pre-drilled holes. Each shelf can be positioned at **3** different heights within the unit.

Place the shelf into position so the pin of the shelf peg is inserted into the pre-drilled holes.

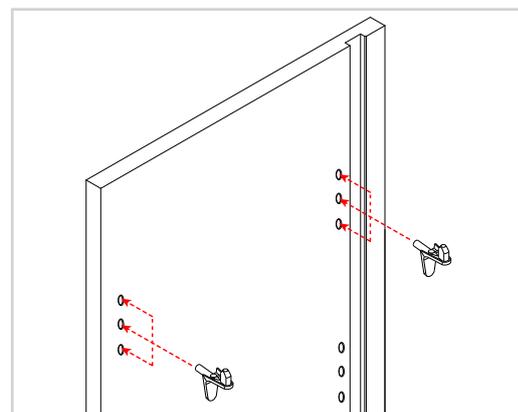


Securing to adjacent units

Clamp together the two units, checking the front edges are level and flush.

Using the screws provided and securing the unit from inside the adjacent unit, 1x30mm screw should be fixed, from inside of the adjacent units, into each corner of the unit.

The screws can be concealed by placing them behind the hinge plates or behind shelves. Cover caps can be used to hide any visible screw heads that remain.

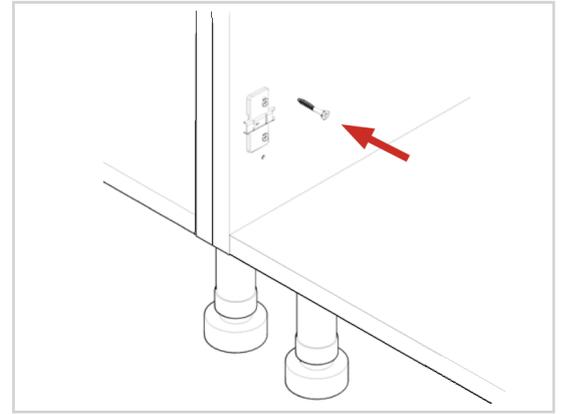


If screws cannot be hidden, secure from inside the feature unit and use cover stickers.

The following steps are for units planned on the end of the run.

Please refer to the decor panel fitting guide for additional info on cutting and securing the decor panel to the unit.

Securing the L-brackets to the decor panel

Attach the L-brackets to the back of the décor panel using **2x15mm** screws.

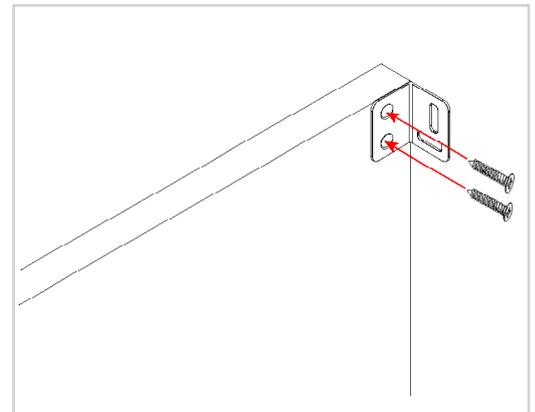


Securing the decor panel to the unit

Clamp together the decor panel with the unit, checking the front edges are level and flush.

Use **6x30mm** screw along sides of the shelf pegs. See diagram for positioning.

The screws will be concealed when the shelf is in position.

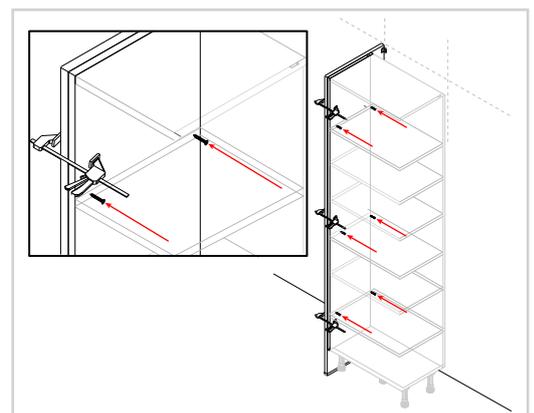


No screws or wall plugs are provided for attaching the unit to the wall.
This is due to variations in wall construction.

Before drilling into the wall you **MUST** check for any hidden services or pipework within the walls.

Securing the decor panel to the wall


For guidance on the appropriate wall fixing for each wall type, please consult the “**Room Preparation Guide**”.

Using the appropriate screws and wall fixings, secure the decor panel to the wall using the L-brackets.

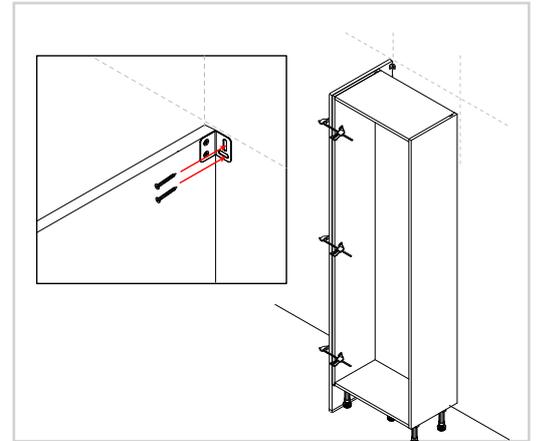

Sealing the decor panel


Using silicone, seal the edges of the decor panel along the floor and wall.

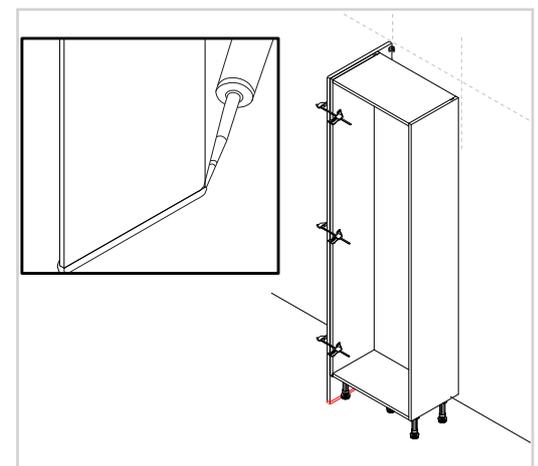

The following steps are for units that require securing to the wall


Installing the corner gussets

Secure the corner gussets to both the top corners of the unit using **4x15mm** screws per gusset.

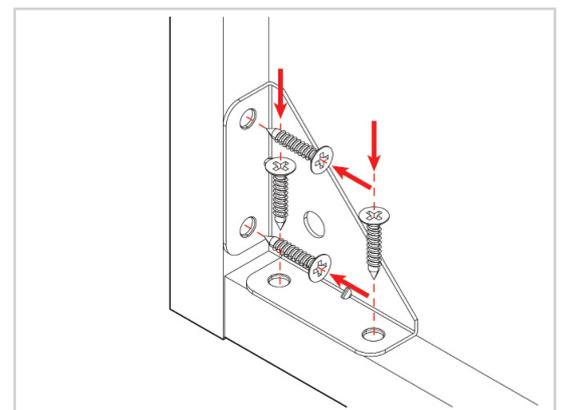

Creating the pilot holes

Drill a small pilot hole through the back panel of the unit through the gusset.

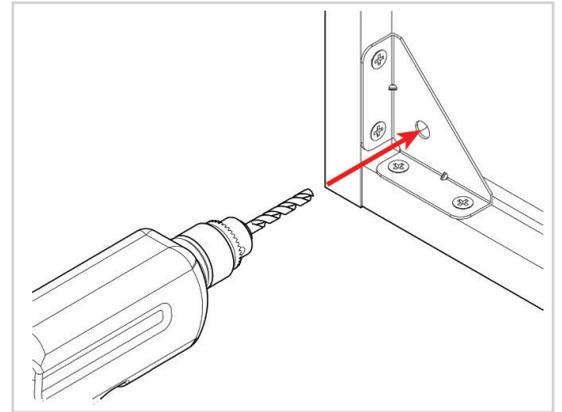


No screws or wall plugs are provided for attaching the unit to the wall.
This is due to variations in wall construction.

Before drilling into the wall you MUST check for any hidden services or pipework within the walls.


Fixing the unit to the wall

Fix to the wall through the gussets using the appropriate screws to attach to the wall.

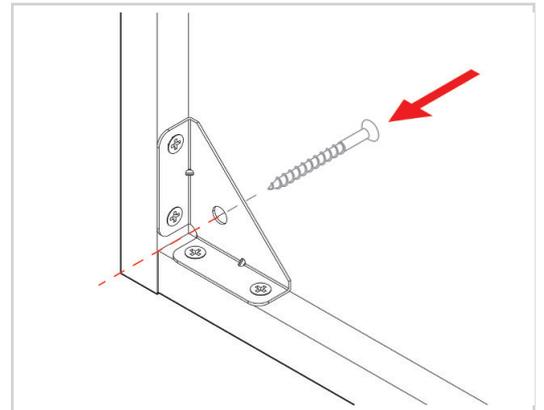

Inserting the shelves into position

Insert the shelves into position. The shelf touches the back panel when installed, if there is a gap between the back panel and shelf then the shelf has been installed back to front and the shelf needs to be rotated.

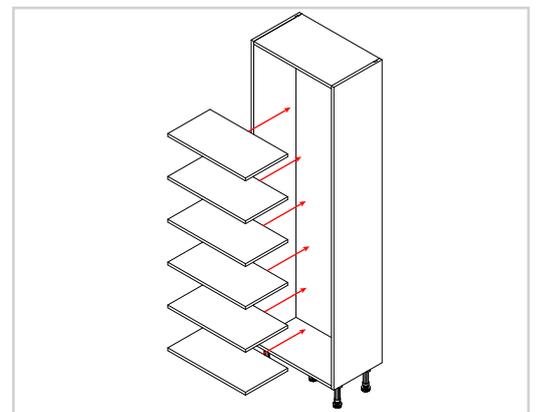

Cleaning the unit

Finally, the unit should be thoroughly cleaned to remove any debris that may have accumulated during the installation.



Store the plinth clips and the remaining 15mm screws.
These will be used later when attaching the plinth.