



## Wall (Door, Solid Top) - Fitting Guide

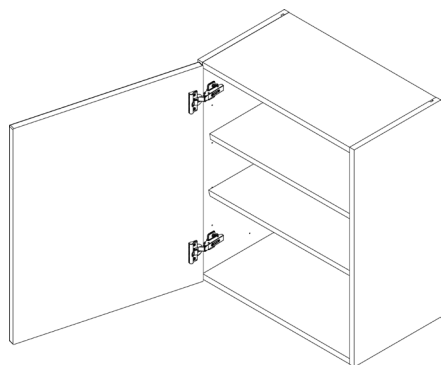


**1 Door Including  
2 or 3 Shelves**

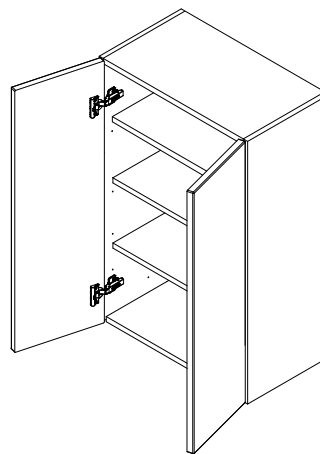

**2 Door Including  
2 or 3 Shelves**

### Cabinet Parts



8x  
1 1/4" Screws




12x  
Cover Caps



5x  
Door Buffers




Shelf Supports



Shelves

### Tools Required



Drill



Stud Finder



Screwdriver



Clamp



Spirit Level



Tape Measure



**Before installing any wall cabinets, ensure the wall construction is strong enough to support the weight of the fully loaded cabinet and that appropriate fixings are used.**


**If you are unsure, seek professional advice before proceeding.**

Remember to take care when unpacking. Please keep your workspace clean, clear, and tidy when working. This will help keep all items safe from damage. Any waste cardboard or plastic should be flattened down and placed in the trash can.

A minimum of two people will be needed to lift the cabinet.

### Removing the frontal/s


Before installing the cabinet, the frontal/s needs to be removed by pulling the release catch.

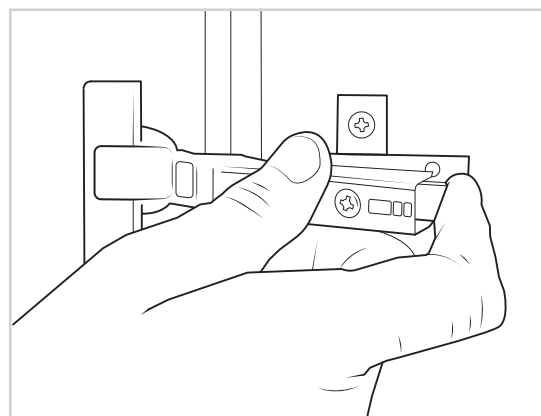

### Removing the fittings


All of the fittings need to be removed from the inside of the cabinet, so it is empty.

Keep all of the fittings on a clean and level surface.

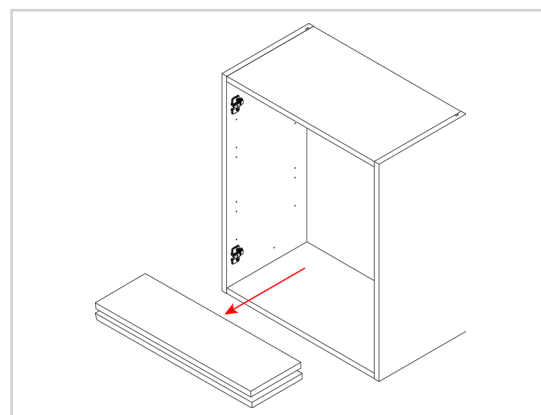

## Locating the studs


Using a stud finder, locate the studs where the cabinet will be installed and mark the wall above and below where the cabinet will sit.

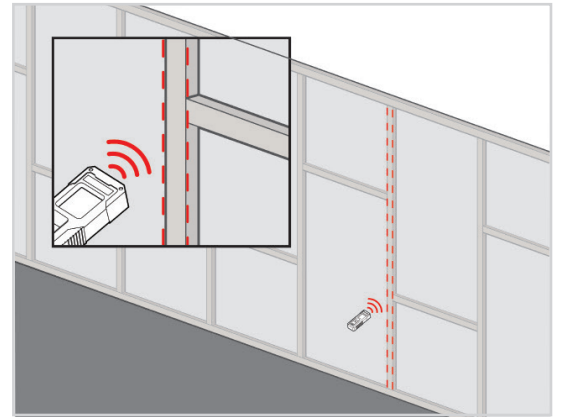

For help on determining the sort of wall you have, please refer to the “Room Preparation Guide.”

## Checking if the cabinet is level

Before installing the cabinet, hold the cabinet against the wall and check that it is level in multiple places using a spirit level.

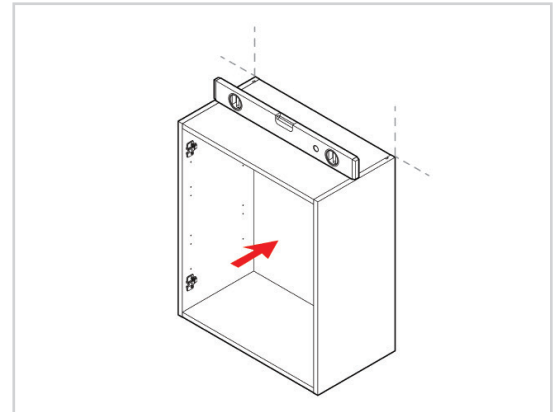


**No screws or wall plugs are provided for attaching the cabinet to the wall. This is due to variations in wall construction.**

## Securing the cabinet


Secure the cabinet in **2** places along the top rail and in **2** places along the bottom rail, where the studs are located.

Use appropriate fixings.

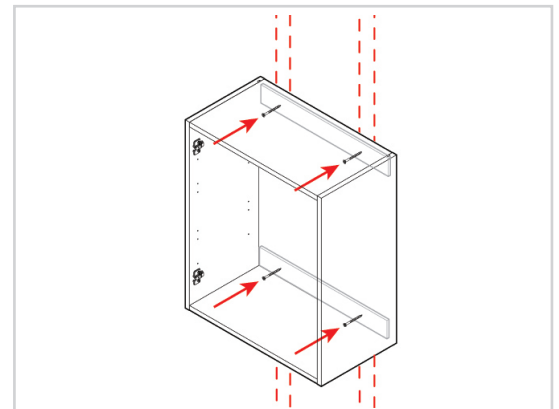

## Securing adjacent cabinets

To secure an additional cabinet, screw **2** holes at the front of the cabinet, just behind the hinge plates, and **2** screws at the rear of the cabinet at the top and bottom, using **1 1/4"** screws.

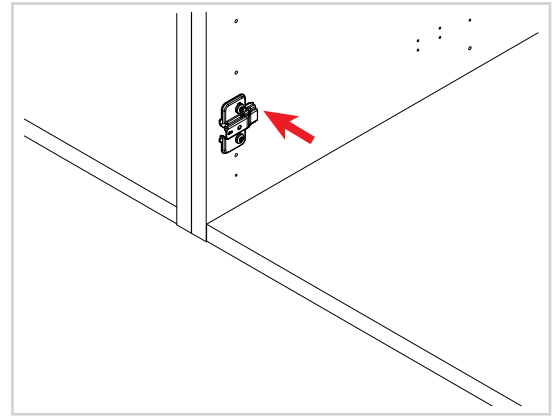


Where the shelf is positioned is down to personal preference.

## Positioning the shelves


Find where the shelves will be installed. Then insert the shelf pegs into the pre-drilled holes.

The shelves will touch the back of the cabinet when installed. If there is a gap between the back panel and the shelf, this means the shelf has been installed back to front and the shelf needs to be rotated.

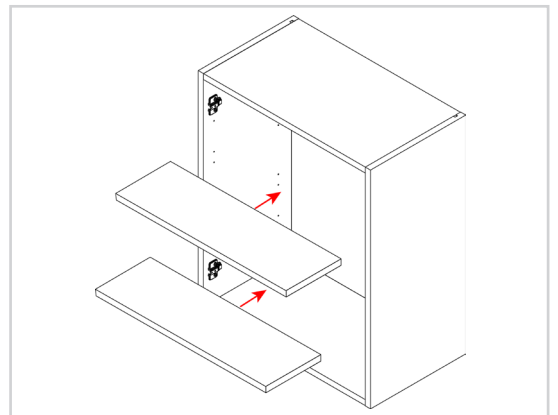



## Attaching the frontal/s

The frontal/s needs to be re-attached to the cabinet. Position the hinge arm on the hooks on the hinge plate, then push the rear of the hinge arm towards the hinge plate until it clicks.

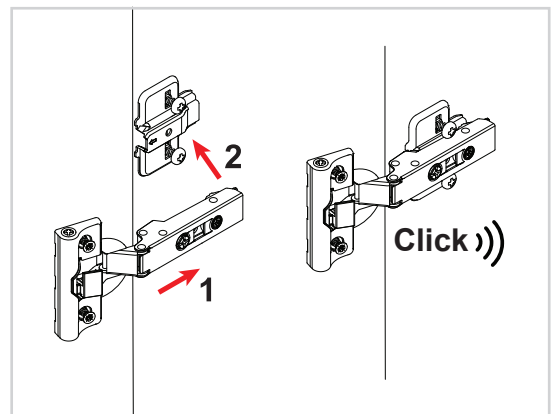


## Adding the door buffers

Position the door buffers on the cabinet, as shown in the images.

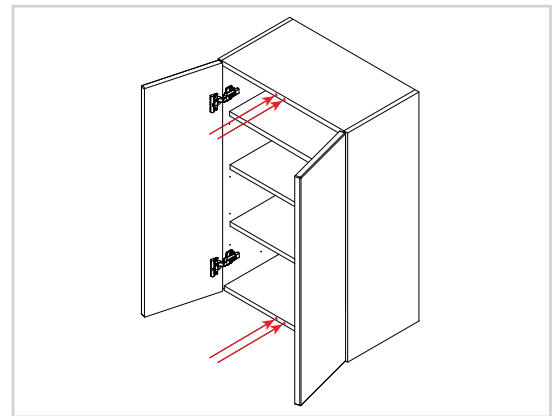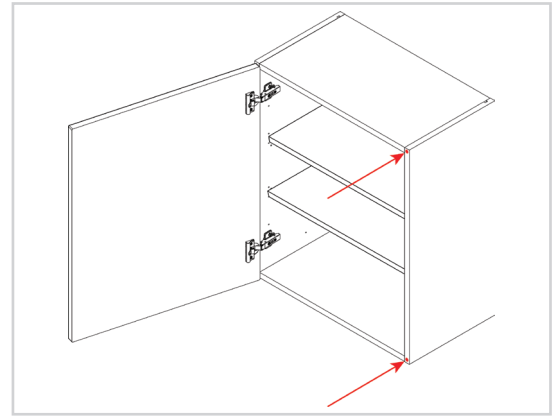

## Cleaning the cabinet

Finally, the cabinet should be thoroughly cleaned to remove any debris that may have accumulated during the installation.

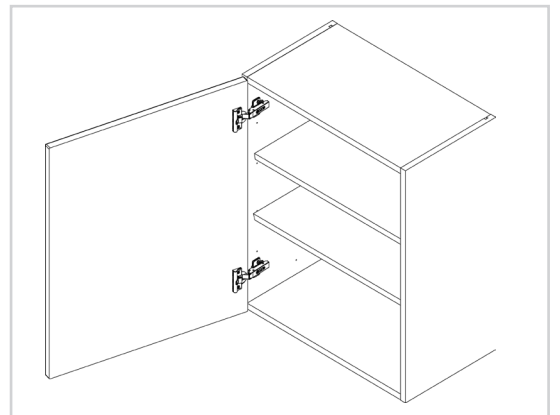

For door alignment please review the following installation guide:  
**Door - Door Hinge Adjustment**