


Base Unit

300-600 Suspended Base Unit (Door, Solid Top) - Fitting Guide




Unit Parts

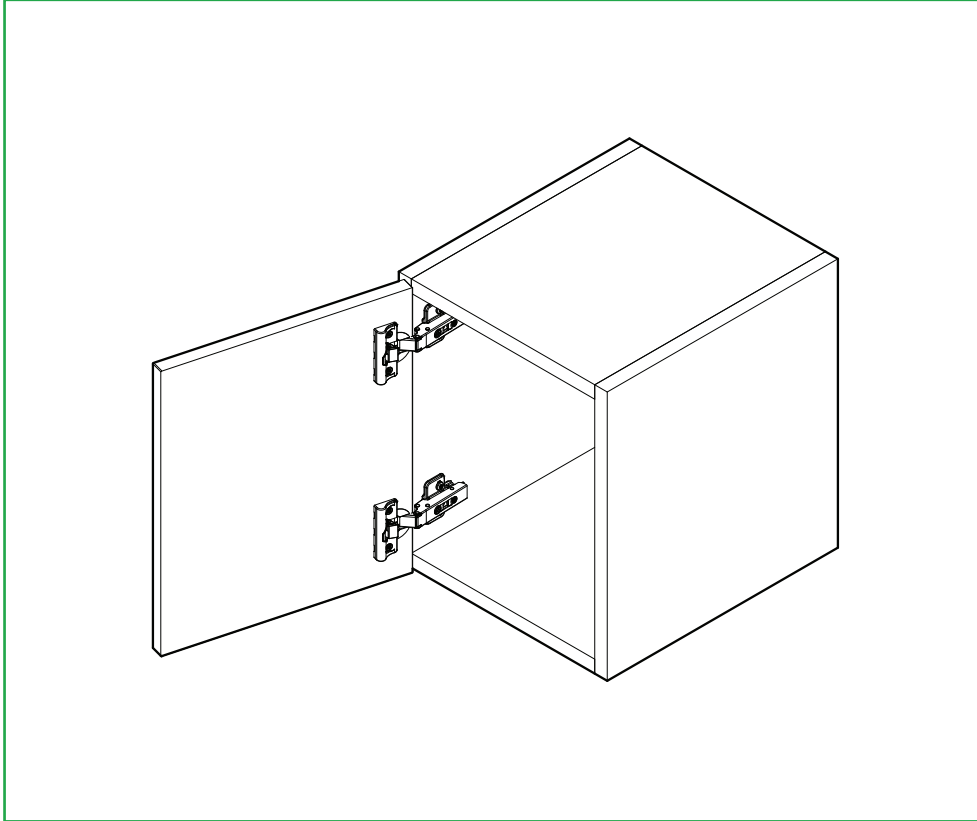


8x15mm
Screws




4x20mm
Screws




4x30mm
Screws



2x
Corner
Gusset Plates



1x
Wall
Hanging Plate
Snap off (x2)



2x
Wall Hanging
Brackets




2x
Hanging
Bracket Cover
Caps




Cover
Caps


Tools Required




Drill




Screwdriver



Clamp



Spirit Level



Tape Measure


Remember to take care when unpacking. Please keep your workspace clean, clear and tidy when working. This will help keep all items safe from any damage. Any un-needed cardboard or plastic should be flattened down and placed in the bin.

A minimum of two people will be needed to lift the unit.



Unpacking the parts and fittings

Remove all content from the packaging and ensure to familiarise yourself with all unit parts and fittings.

All parts and fittings should be kept on a clean and level surface.

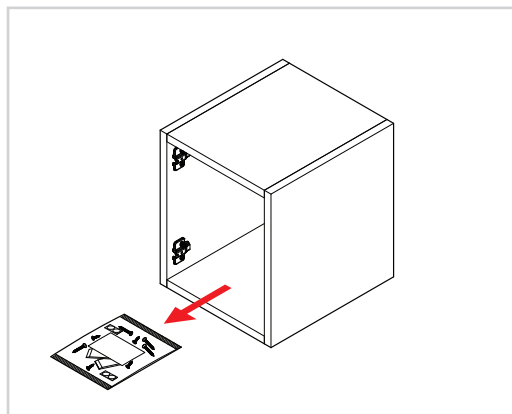


The next few steps will take place on the back of the wall unit.

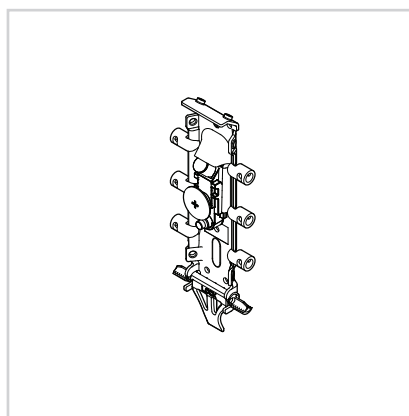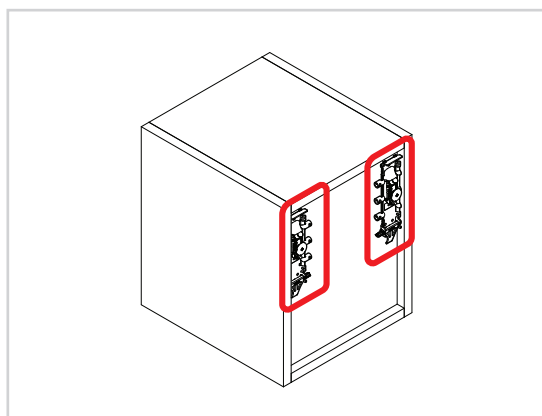


Installing the wall hanging bracket




Insert the hanging bracket into pre-drilled holes.

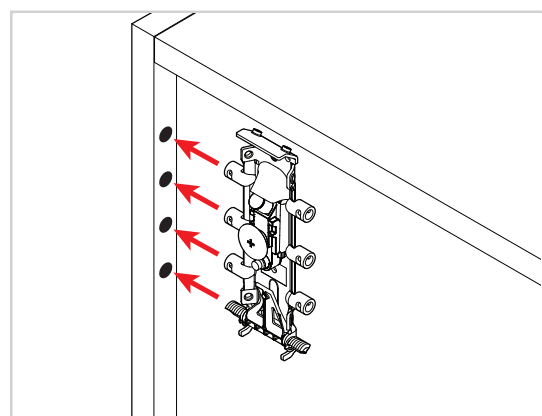

Rotate the locking lever down **180 degrees**.

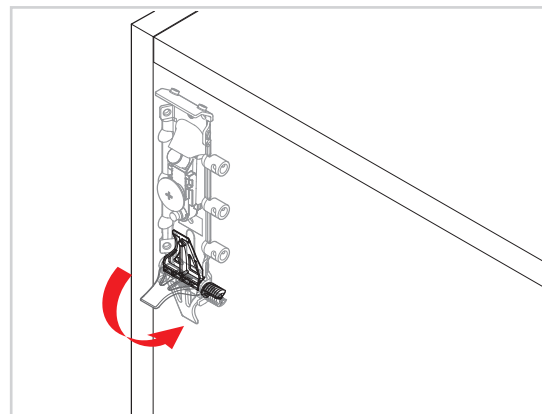


Secure with provided **2x20mm** screws per bracket.

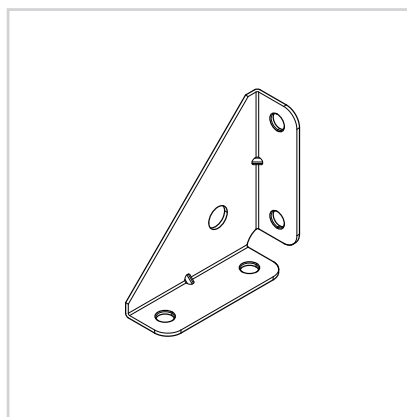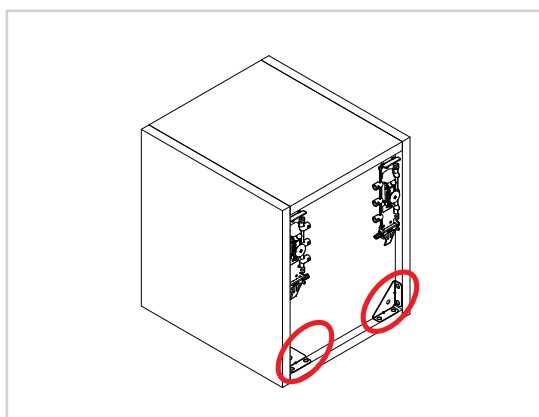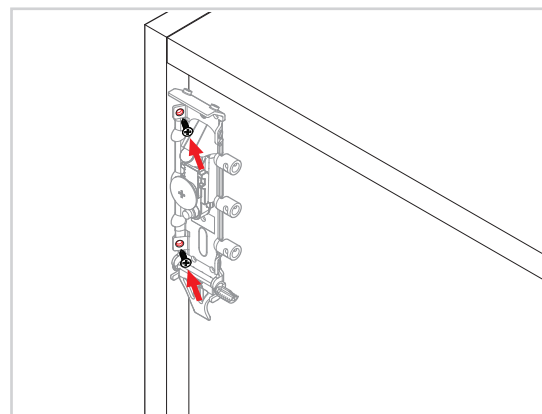


Installing the corner gussets

Secure the corner gussets to both bottom corners of the wall unit using **4x15mm** screws per gusset.

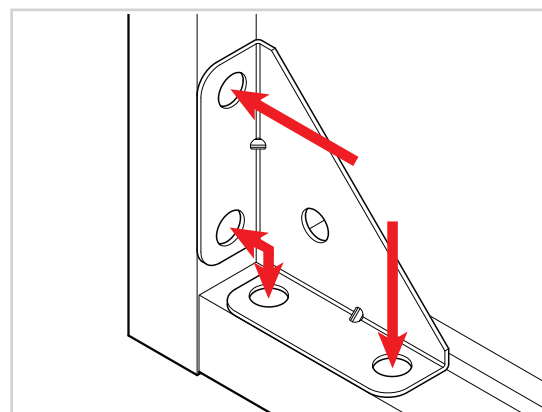

Creating the pilot holes


Drill small pilot holes through the back panel of the unit through each gusset.

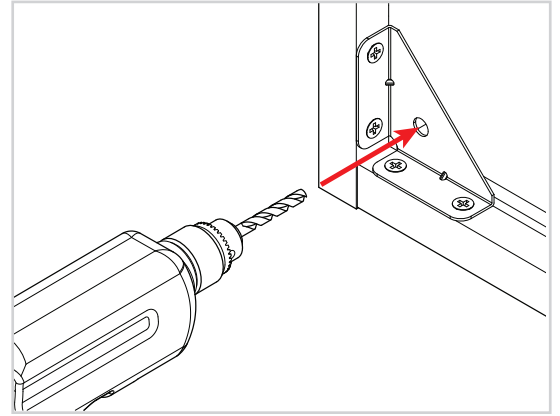


Finding the fixing point for the wall brackets

The fixing point for the wall hanging brackets are **125mm** below the top of the units.

Draw a line on the wall **125mm** below the top line of the unit (Already marked).

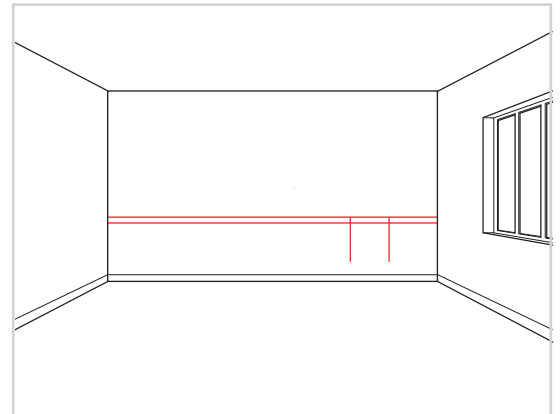


Draw a vertical line **20mm** inside either side of the pre-marked wall unit positions.

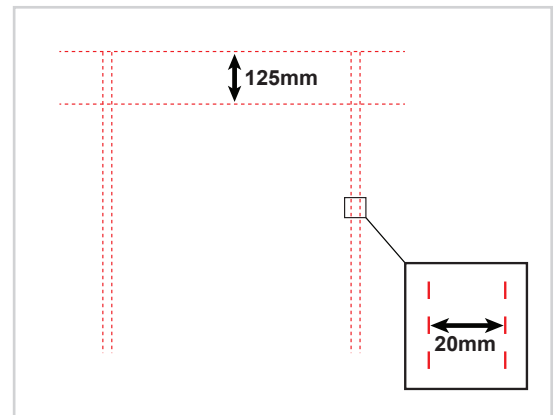

Snapping the wall hanging plate

Bend the wall hanging plate down the middle until it snaps into two pieces.

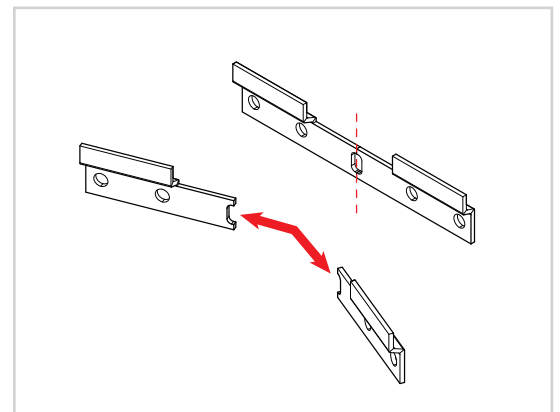

No screws or wall plugs are provided for attaching the unit to the wall. This is due to variations in wall construction.


Before drilling into the wall you MUST check for any hidden services or pipework within the walls.

Attaching the wall hanging brackets to the wall

Position the **2x** hanging brackets as shown and mark the holes onto the wall.

Remove the hanging bracket, then drill holes into the wall of an appropriate size for the screws required.

Secure the hanging bracket to the wall by fixing screws through the bracket into the holes made.

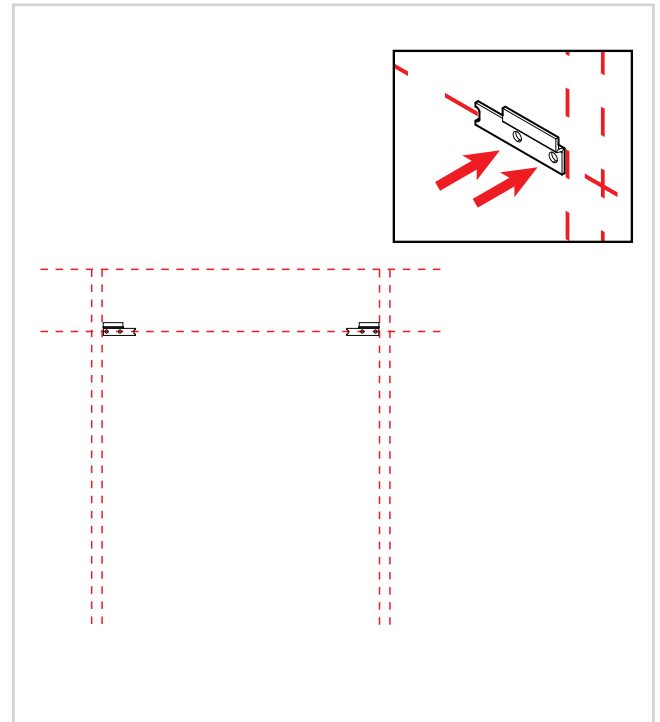


In order to complete the steps below the red screw found on the wall hanging bracket will need to be screwed all the way out.

Lifting the unit into place

Lift the unit against the wall slightly higher than its finished height. Lower the unit down onto the wall hanging brackets.

Before releasing the unit, gently tug it to ensure it is securely supported by the hanging brackets.

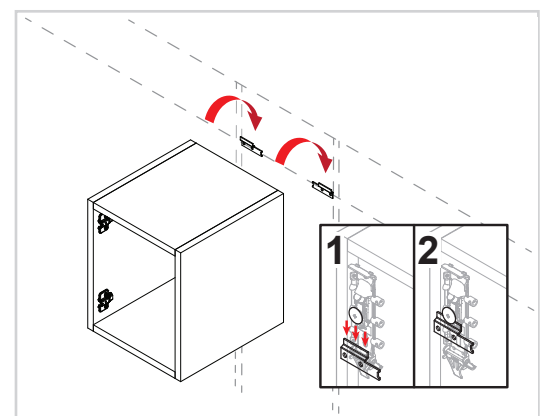

Adjusting the wall brackets

Use the points below to adjust the unit to suit.


Place the cover cap once the adjustments have been made.

A- Rotate the screw clockwise to move the unit up. Anti-clockwise for down.

B- Adjust the depth using centre screw.

C- Screw the red screw until it touches the plate to lock in position.

Place cover caps over the wall brackets.

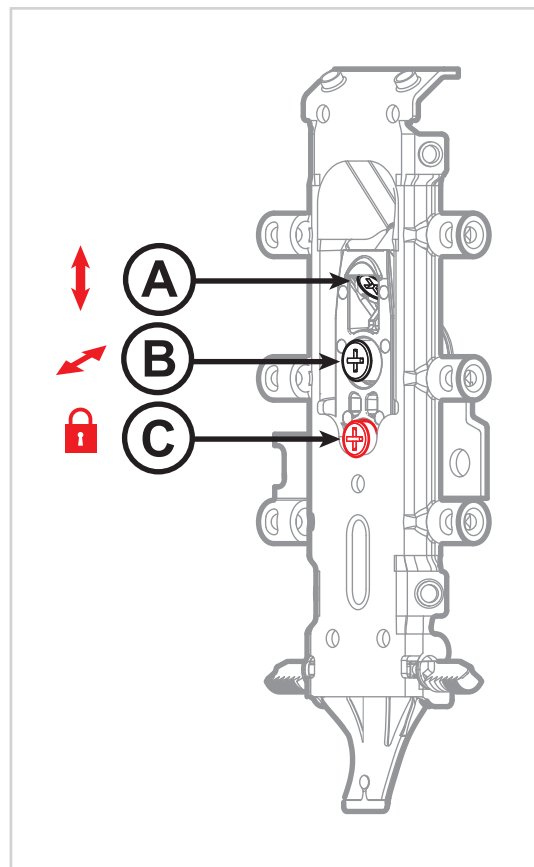

Double check units are level after adjustments.
Use a spirit level to ensure the units are level front to back, left to right and diagonally.


No screws or wall plugs are provided for attaching the unit to the wall. This is due to variations in wall construction.

Before drilling into the wall you MUST check for any hidden services or pipework within the walls.

Fixing the wall unit to the wall

Fix the unit to the wall through the gussets using the appropriate screws.


Use the cover caps to conceal the screws.

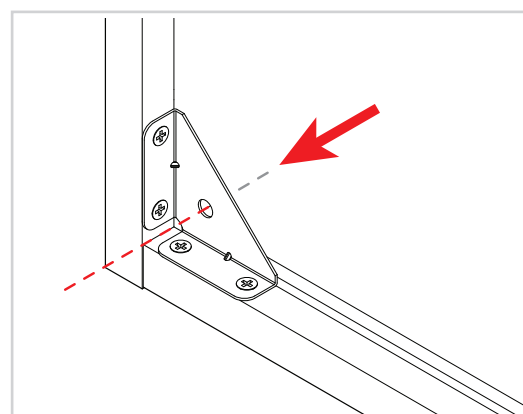


Securing to adjacent units

Clamp together the two units, checking the front edges are level and flush.

Using the screws provided, **1x30mm** screw should be fixed, from the inside of the adjacent units, into each corner of the unit.




The screws can be concealed by placing them behind hinge plates or behind shelves. Cover caps can be used to hide any visible screw heads that remain.

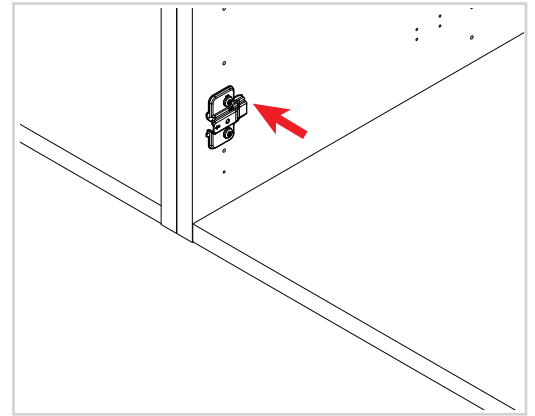

Cleaning the unit

Finally, the unit should be thoroughly cleaned to remove any debris that may have accumulated during the installation.

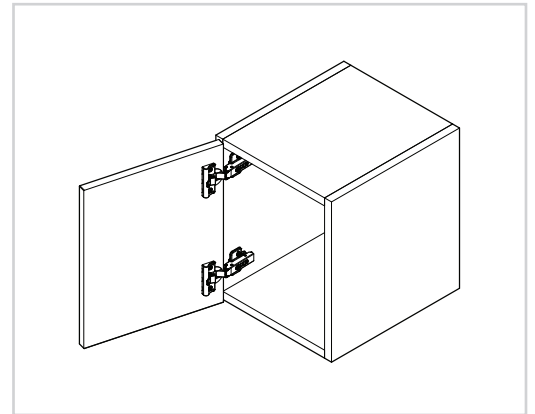

For door alignment please review the following installation guide:
Door - Door Frontal Hinge Adjustment