





Select

FLAGSHIP DIGITAL INTERCONNECTS



KSUSB

	CU (copper)	HB (silver/copper)	AG (silver)
DATA PAIR CONDUCTOR:	24AWG silver plated(8%) copper	24AWG pure silver	
DATA PAIR DESIGN:	Precision shielded twisted pair		
DATA PAIR DIELECTRIC:	Expanded PTFE	Pigment free expanded PTFE	
DIFFERENTIAL IMPEDANCE:	90ohm		
DATA ISOLATED FROM DC LINE:	YES		
5V DC LINE:	4x24AWG copper		4x24AWG pure silver
SHIELDING:	95% coverage braided silver plated copper (44AWG stranding)		
SHIELD BONDING:	Circumferentially bonded (360 degree)		
MAXIMUM LENGTH:	6 meter	6.5 meter	
SHELL FINISHING:	Blood wood/ Gaboon ebony	Blood wood/ Gaboon ebony/purple heart	Purple heart/ Gaboon ebony

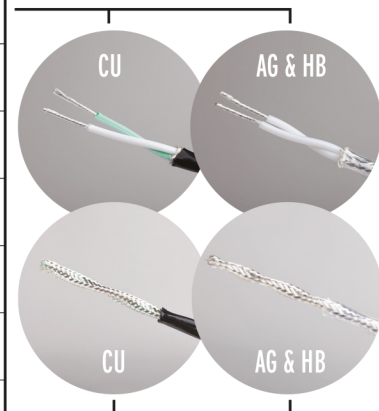

CONFIGURATION OPTIONS

A - B



C(OTG) - B



C(OTG) - C





2752 South 1900 West, Ogden, Utah 84401 USA
www.kimber.com - 801-621-5530



v082020